

# MACHINED TYPE NEEDLE ROLLER BEARINGS

- Machined Type Caged Needle Roller Bearings
- Machined Type Guide Needle Roller Bearings




## Structure and Features


IKO Machined Type Needle Roller Bearings are bearings with a low sectional height and large load ratings. The outer ring has high rigidity and can easily be used even for light alloy housings. These bearings are available in metric series and inch series, both of which have the caged type and the full complement type. It is therefore possible to select a suitable bearing for use under various conditions such as heavy loads and high-speed or low-speed rotations. In addition, there are bearings with and without an inner ring. As the type without inner ring uses a shaft as the raceway surface, a compact design is possible.

Structures of Machined Type Needle Roller Bearings


RNA49

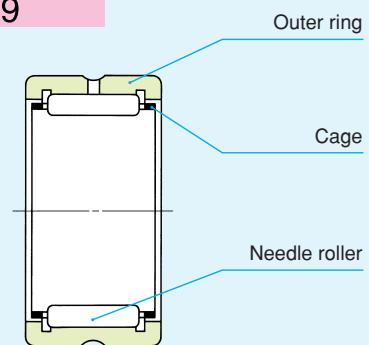


NA49

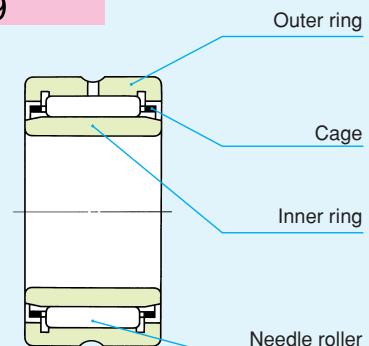

RNA49…UU

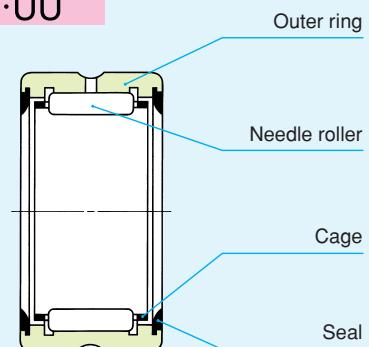

GTR

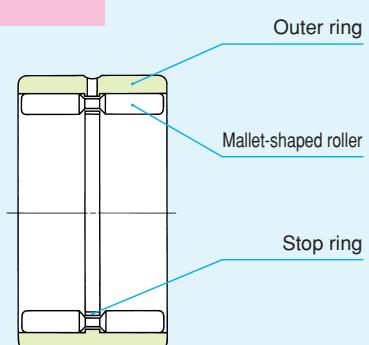

NA  
TAFI  
TRI  
BRI

## Types

Machined Type Needle Roller Bearings are available in various types shown in Table 1.

**Table 1.1 Type of bearing (Standard type)**

Type \ Series	Caged Needle Roller Bearings		Guide Needle Roller Bearings	
Series	Without inner ring	With inner ring	Without inner ring	With inner ring
Metric series	Dimension series 49	RNA 49	NA 49	GTR GTRI
	Dimension series 69	RNA 69	NA 69	
	Dimension series 48	RNA 48	NA 48	
	For heavy duty	TR	TRI	
	For light duty	TAF	TAFI	
Inch series	BR	BRI	GBR	GBRI

**Table 1.2 Type of bearing (With seal)**

Type \ Series	Caged Needle Roller Bearings		Guide Needle Roller Bearings	
Series	Without inner ring	With inner ring	Without inner ring	With inner ring
Metric series	Dimension series 49	Two side seals RNA 49···UU	NA 49···UU	— —
	One side seal	RNA 49···U	NA 49···U	
	Dimension series 69	Two side seals RNA 69···UU	NA 69···UU	
	One side seal	RNA 69···U	NA 69···U	
	Inch series	Two side seals BR ···UU BRI ···UU	GBR···UU GBRI···UU	
	One side seal	BR ···U BRI ···U	GBR···U GBRI···U	

## Caged Needle Roller Bearings

This type of bearing combines a collared outer ring with the IKO's unique lightweight rigid cage and needle rollers. During operation, needle rollers are guided precisely by the cage, and an ideal load distribution is obtained.

The metric series consists of the NA48 and NA49 series of ISO Standard, NA69 and TAFI series which are based on the international dimension series, and the heavy duty TRI series which is widely used in Japan. The TAFI series has a sectional height as low as that of the shell type and is used for light loads.

The inch series or BRI series is based on the specifications of ANSI Standard of USA.

### Caged Needle Roller Bearings without Inner Ring

As shown in the section "Design of shaft and housing" on page 47, any desired radial clearance can be selected by assembling this type of bearing with a shaft which is heat-treated and finished by grinding.

These bearings are free from the effects on dimensional accuracy caused by assembling an inner ring,

so that the rotational accuracy is improved. Also, the shaft rigidity can be improved as the shaft diameter can be increased by an amount corresponding to the inner ring thickness.

### Caged Needle Roller Bearings with Inner Ring

This type of bearing is used when the shaft cannot be heat-treated and finished by grinding. The outer and inner rings are separable and a small relief clearance is provided on both sides of the inner ring raceway to facilitate bearing mounting. In the TRI and BRI series, the width of the inner ring is larger than that of the outer ring.

Due to heat expansion during operation or mounting errors, the inner or outer ring may be shifted axially and the whole length of the rollers may not be in contact with the raceway. Therefore, attention should be paid to the allowable axial shift  $S$  as shown in the table of dimensions.

### Needle Roller Bearings with Seal

These bearings are sealed types of the NA49, NA69 and BRI series bearings, in which a seal is installed on one side (type with one seal) or both sides (type with two seals) of the bearing. The seal is made of special synthetic rubber and effectively prevents dust penetration and grease leakage.

## Guide Needle Roller Bearings

These bearings are full complement type bearings and use mallet-shaped rollers which are guided accurately by the guide rail located at the center of the outer ring raceway and the guide groove of the mallet-shaped roller. This minimizes skewing (tilting of the roller from its rotating axis), which is normally a weak point of full complement bearings, and improves the rotational accuracy. This type of bearing is especially suitable for heavy loads, shock loads and oscillating motions.

The bearings are available in metric and inch series. Bearings with and without inner rings are available in both series. In bearings with an inner ring, the width of the inner ring is larger than that of the outer ring.


The GBRI series of the inch series includes types with a seal or seals which are incorporated on one or both sides.

## Identification Number

The identification number of Machined Type Needle Roller Bearings consists of a model code, dimensions, any supplemental codes and a classification symbol. Examples are shown below.


### Examples of identification number

#### Example 1

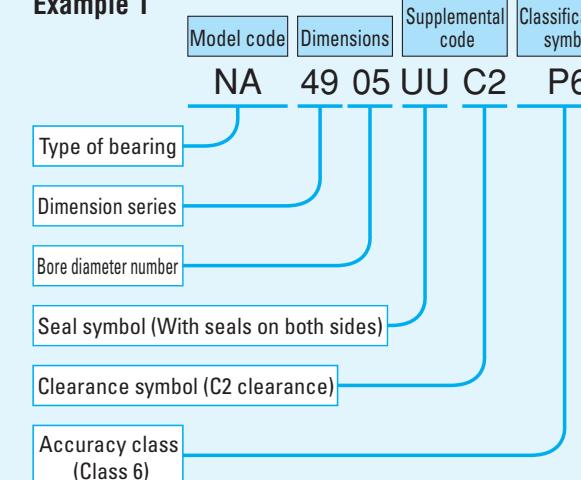

Type of bearing  
Dimension series  
Bore diameter number  
Seal symbol (With seals on both sides)  
Clearance symbol (C2 clearance)  
Accuracy class (Class 6)

#### Example 2

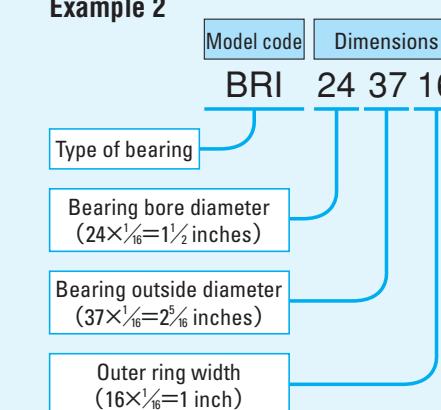

Type of bearing  
Bearing bore diameter ( $24 \times \frac{1}{16} = 1\frac{1}{2}$  inches)  
Bearing outside diameter ( $37 \times \frac{1}{16} = 2\frac{1}{16}$  inches)  
Outer ring width ( $16 \times \frac{1}{16} = 1$  inch)

NA  
TAFI  
TRI  
BRI

## Accuracy

Machined Type Needle Roller Bearings are manufactured based on JIS (See page 34.). The tolerances for the smallest single roller set bore diameter of bearings without inner ring are based on Table 14 on page 36. For BR and BRI series, the accuracy is based on Table 2 and the tolerances for the smallest single roller set bore diameter are based on Table 3.

**Table 2 Accuracy of inner and outer rings of inch series BR and BRI**

unit:  $\mu\text{m}$

$d$ or $D$ Nominal bearing bore dia. or outside dia. mm		$\Delta_{dmp}$ Single plane mean bore diameter deviation		$\Delta_{Dmp}$ Single plane mean outside diameter deviation		$\Delta_{Bs} (\Delta_{Cs})$ Deviation of a single inner (or outer) ring width		$K_{ia}$ Radial runout of assembled bearing inner ring	$K_{ea}$ Radial runout of assembled bearing outer ring
Over	Incl.	High	Low	High	Low	High	Low	Max.	Max.
—	19.050	0	-10	—	—	0	-130	10	—
19.050	30.162	0	-13	0	-13	0	-130	13	15
30.162	50.800	0	-13	0	-13	0	-130	15	20
50.800	82.550	0	-15	0	-15	0	-130	20	25
82.550	120.650	0	-20	0	-20	0	-130	25	35
120.650	184.150	—	—	0	-25	0	-130	30	45

Remark  $d$  for  $\Delta_{dmp}$ ,  $\Delta_{Bs}$ ,  $\Delta_{Cs}$  and  $K_{ia}$ , and  $D$  for  $\Delta_{Dmp}$  and  $K_{ea}$

**Table 3 Tolerances for smallest single roller set bore diameter  $F_{ws\ min}$  of inch series BR** unit:  $\mu\text{m}$

$F_w$ Nominal roller set bore diameter mm		$\Delta F_{ws\ min}$ Deviation of smallest single roller set bore diameter	
Over	Incl.	High	Low
—	18.034	+43	+20
18.034	30.226	+46	+23
30.226	41.910	+48	+25
41.910	50.038	+51	+25
50.038	70.104	+53	+28
70.104	80.010	+58	+28
80.010	102.108	+61	+31

## ■ Clearance

Radial internal clearances of Machined Type Needle Roller Bearings are made to the CN clearance shown in Table 19 on page 40. Radial internal clearances of BRI series are based on Table 4.

**Table 4 Radial internal clearance of inch series BRI** unit:  $\mu\text{m}$

$F_w$ Nominal roller set bore diameter mm		Radial internal clearance	
Over	Incl.	Min.	Max.
—	18.034	33	66
18.034	25.908	41	76
25.908	30.226	46	82
30.226	35.052	48	86
35.052	41.910	50	89
41.910	50.038	50	92
50.038	70.104	56	99
70.104	80.010	56	104
80.010	100.076	63	117
100.076	102.108	68	127

**Table 5 Bearings with prepacked grease**

○ : With prepacked grease × : Without prepacked grease

Bearing type		Standard type	With seals on both sides	With a seal on one side
Caged Needle Roller Bearings	Metric series	RNA, NA	×	○
		TR, TRI	×	—
		TAF, TAFI	×	—
	Inch series	BR, BRI	×	○
Guide Needle Roller Bearings	Metric series	GTR, GTRI	—	—
	Inch series	GBR, GBRI	—	—

## ■ Fit

The recommended fits for Machined Type Needle Roller Bearings are shown in Tables 22 to 24 on pages 44 and 45.

## ■ Lubrication

Bearings with prepacked grease are shown in Table 5. ALVANIA GREASE 2 (SHELL) is prepacked as the lubricating grease.

In the case of bearings without prepacked grease, perform proper lubrication. Operating them without lubrication will increase the wear of the rolling contact surfaces and shorten their lives.

## ■ Oil Hole

Table 6.1 shows the number of oil holes of the outer ring and Table 6.2 shows the number of oil holes of the inner ring.

When an outer ring with an oil hole is especially required for the type without an oil hole, add "— OH" before the clearance symbol in the identification number. When an outer ring with an oil hole and an oil groove is required for the type without an oil hole, attach "— OG" before the clearance symbol.

Example: TAFI 203216 — OH C2 P6

When an outer ring with multiple oil holes or an inner ring with an oil hole(s) is required, please consult IKO.

**Table 6.1 Number of oil holes of the outer ring**

Bearing type		Number of oil holes of the outer ring		
		Nominal roller set bore diameter $F_w$ mm	Standard type	With seals on both sides
Caged Needle Roller Bearings	Metric series	RNA, NA	1	1
		TR, TRI	1	—
		TAF, TAFI	0	—
	Inch series	BR, BRI	1	—
Guide Needle Roller Bearings	Metric series	$F_w \leq 26$	1	1
	Inch series	$26 < F_w \leq 69.850$	2	1
		$69.850 < F_w$	1	—
		GTR, GTRI	1	—
		GBR, GBRI	1	1

Remark The type with an oil hole(s) is provided with an oil groove.

**Table 6.2 Number of oil holes of the inner ring**

Bearing type		Number of oil holes of the inner ring		
		Nominal bearing bore diameter $d$ mm	Standard type	With seals on both sides
Caged Needle Roller Bearings	Metric series	NA	0	0
		TRI	0	0
		TAFI	0	—
	Inch series	BRI	1	1
Guide Needle Roller Bearings	Metric series	$d \leq 76.200$	2	1
	Inch series	$76.200 < d$	0	—
		GTRI	0	—
		GBRI	0	0

Remark The type with an oil hole(s) is provided with an oil groove.

## ■ Matched Set Bearings



When using two or more Machined Type Needle Roller Bearings adjacent to each other on the same shaft, it is necessary to obtain an even load distribution. On request, a set of bearings is available, in which bearings are matched to obtain an even load distribution.

## ■ Mounting

Mounting dimensions for Machined Type Needle Roller Bearings are shown in the table of dimensions.

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

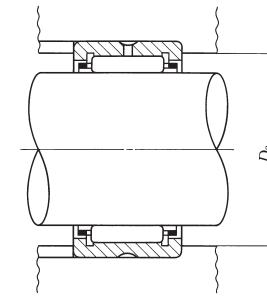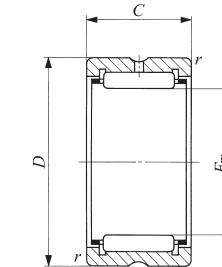

RNA49 TAF  
RNA69 ( $F_w \leq 35$ )

Shaft dia. 5 – 15mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
5	—	—	—	TAF 51010	—	—	3.4
	—	—	—	TAF 51012	—	—	4.2
	RNA 493	—	—	—	—	—	4.6
6	RNA 494	—	—	TAF 61212	—	—	5.3
	—	—	—	—	—	—	6.4
7	RNA 495	—	—	TAF 71410	—	—	5.9
	—	—	—	TAF 71412	—	—	6.9
	—	—	—	—	—	—	8.3
8	RNA 496	—	—	TAF 81512	—	—	7.4
	—	—	—	TAF 81516	—	—	9.1
	—	—	—	—	—	—	12.9
9	—	—	—	TAF 91612	—	—	9.8
	—	—	—	TAF 91616	—	—	13.2
	RNA 497	—	—	—	—	—	9.3
10	—	—	—	TAF 101712	—	—	10.7
	—	—	—	TAF 101716	—	—	14.3
	RNA 498	—	—	—	—	—	12.6
12	—	—	—	TAF 121912	—	—	12.2
	—	—	—	TAF 121916	—	—	16.3
	RNA 499	—	—	—	—	—	13.6
14	RNA 4900	—	—	—	—	—	16.5
	—	—	—	TAF 142216	—	—	21
	—	—	—	TAF 142220	—	—	26.5
15	—	—	—	TAF 152316	—	—	22.5
	—	—	—	TAF 152320	—	—	28

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.




Remarks 1. TAF series with a roller set bore diameter  $F_w$  of 26 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	$D$	$C$	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm	Standard mounting dimension	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
					$D_a$ Max. mm			
5	10	10	0.2	8.4	2 420	1 950	80 000	
	10	12	0.2	8.4	3 080	2 660	80 000	
	11	10	0.15	9.8	2 420	1 950	80 000	
6	12	10	0.15	10.8	2 700	2 320	70 000	
	12	12	0.2	10.4	3 440	3 170	70 000	
7	13	10	0.15	11.8	2 960	2 690	60 000	
	14	10	0.2	12.4	3 600	2 960	60 000	
	14	12	0.2	12.4	4 610	4 050	60 000	
8	15	10	0.15	13.8	3 960	3 420	50 000	
	15	12	0.2	13.4	5 060	4 690	50 000	
	15	16	0.2	13.4	7 080	7 220	50 000	
9	16	12	0.2	14.4	5 490	5 330	45 000	
	16	16	0.2	14.4	7 680	8 210	45 000	
	17	10	0.15	15.8	4 530	3 650	45 000	
10	17	12	0.2	15.4	5 880	5 970	40 000	
	17	16	0.2	15.4	8 230	9 190	40 000	
	19	11	0.2	17.4	6 180	5 030	40 000	
12	19	12	0.3	17	6 610	7 260	35 000	
	19	16	0.3	17	9 250	11 200	35 000	
	20	11	0.3	18	6 600	6 310	35 000	
14	22	13	0.3	20	9 230	10 100	30 000	
	22	16	0.3	20	11 700	13 700	30 000	
	22	20	0.3	20	14 800	18 600	30 000	
15	23	16	0.3	21	12 300	14 900	30 000	
	23	20	0.3	21	15 600	20 200	30 000	

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

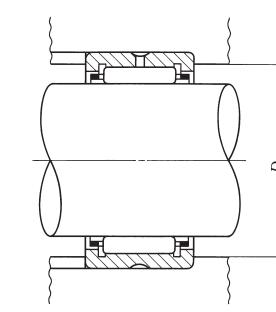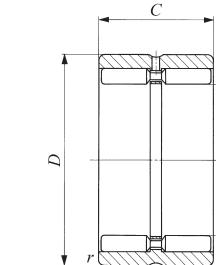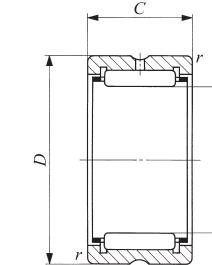

RNA49 TAF TR  
RNA69 ( $F_w \leq 35$ )

GTR

Shaft dia. 16 – 22mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
16	<b>RNA 4901</b>	—	—	<b>TAF 162416</b> <b>TAF 162420</b>	—	—	18.1
		—	—		—	—	23
		—	—		—	—	29
		—	—		—	—	30
17	—	—	—	<b>TAF 172516</b> <b>TAF 172520</b>	—	—	24.5
	—	—	—		—	—	30.5
18	<b>RNA 49/14</b>	—	—	<b>TAF 182616</b> <b>TAF 182620</b>	—	—	19.9
		—	—		—	—	25.5
		—	—		—	—	32
19	—	—	—	<b>TAF 192716</b> <b>TAF 192720</b>	—	—	27
	—	—	—		—	—	34
20	<b>RNA 4902</b>	—	—	<b>TAF 202816</b> <b>TAF 202820</b>	—	—	21.5
		—	—		—	—	27.5
		—	—		—	—	35.5
		—	—		—	—	37
	—	—	—	<b>TR 203320</b>	—	<b>GTR 203320</b>	59.5
	—	—	—		—	—	69
21	—	—	—	<b>TAF 212916</b> <b>TAF 212920</b>	—	—	29
	—	—	—		—	—	36
22	<b>RNA 4903</b>	—	—	<b>TAF 223016</b> <b>TAF 223020</b>	—	—	23.5
		—	—		—	—	30
		—	—		—	—	37.5
		—	—		—	—	40.5
	—	—	—	<b>TR 223425</b>	—	<b>GTR 223425</b>	73.5
	—	—	—		—	—	87

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.




Remarks1. TAF series with a roller set bore diameter  $F_w$  of 26 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	$D$	$C$	$r$ <sup>(1)</sup> s min	Boundary dimensions mm	Standard mounting dimension	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
					$D_a$ Max. mm			
16	24	13	0.3	22	9 660	11 100	25 000	25 000
	24	16	0.3		12 300	15 100	25 000	
	24	20	0.3		15 500	20 400	25 000	
	24	22	0.3		17 100	23 000	25 000	
17	25	16	0.3	23	12 900	16 300	25 000	25 000
	25	20	0.3		16 300	22 000	25 000	
18	26	13	0.3	24	10 600	12 800	20 000	20 000
	26	16	0.3		13 400	17 500	20 000	
	26	20	0.3		17 000	23 600	20 000	
19	27	16	0.3	25	14 000	18 700	20 000	20 000
	27	20	0.3		17 700	25 300	20 000	
20	28	13	0.3	26	10 900	13 800	20 000	20 000
	28	16	0.3		13 900	18 800	20 000	
	28	20	0.3		17 600	25 400	20 000	
	28	23	0.3		19 300	28 800	20 000	
21	33	20	0.3	31	24 300	26 500	20 000	20 000
	33	20	0.3		29 200	37 200	7 500	
21	29	16	0.3	27	14 400	20 000	19 000	19 000
	29	20	0.3		18 200	27 100	19 000	
22	30	13	0.3	28	11 700	15 600	18 000	18 000
	30	16	0.3		14 900	21 200	18 000	
	30	20	0.3		18 900	28 700	18 000	
	30	23	0.3		20 800	32 500	18 000	
22	34	25	0.3	32	29 100	36 800	18 000	18 000
	34	25	0.3		37 900	57 800	7 000	

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

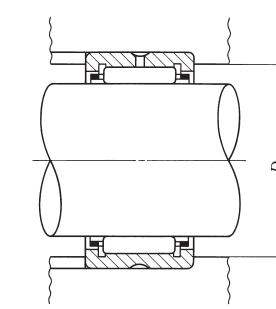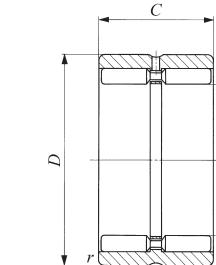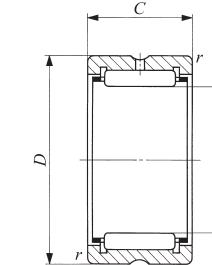

RNA49 TAF TR  
RNA69 ( $F_w \leq 35$ )

GTR

Shaft dia. 24 – 30mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
24	—	—	—	TAF 243216 TAF 243220	—	—	32 40.5
25	RNA 4904	—	—	TAF 253316 TAF 253320	—	—	33.5 42 55.5 95.5
		RNA 6904	—	—	—	—	71 89 81.5 104
	—	—	—	TR 253820 TR 253825	—	—	34.5 43.5
	—	—	—	GTR 253820 GTR 253825	—	—	51.5 83.5 56.5 97.5
26	—	—	—	TAF 263416 TAF 263420	—	—	57 85
28	RNA 49/22	—	—	TAF 283720 TAF 283730	—	—	64.5 97.5
		RNA 69/22	—	—	—	—	64 111
	—	—	—	TR 304425	—	—	115 133
	—	—	—	GTR 304425	—	—	—

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks1. TAF series with a roller set bore diameter  $F_w$  of 26 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.


2. No grease is prepacked. Perform proper lubrication.

$F_w$	Boundary dimensions mm				Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
	$F_w$	$D$	$C$	$r$ <sup>(1)</sup> s min				
24	32	16	0.3	30	15 300	22 500	17 000	
24	32	20	0.3	30	19 400	30 500	17 000	
25	33	16	0.3	31	15 800	23 700	16 000	
25	33	20	0.3	31	20 000	32 100	16 000	
25	37	17	0.3	35	21 000	25 000	16 000	
25	37	30	0.3	35	35 400	48 900	16 000	
25	38	20	0.3	36	28 900	35 000	16 000	
25	38	25	0.3	36	34 800	44 400	16 000	
25	38	20	0.3	36	33 300	46 500	6 000	
25	38	25	0.3	36	42 400	63 700	6 000	
26	34	16	0.3	32	16 300	24 900	15 000	
26	34	20	0.3	32	20 600	33 800	15 000	
28	37	20	0.3	35	21 700	37 100	14 000	
28	37	30	0.3	35	31 100	58 900	14 000	
28	39	17	0.3	37	21 400	28 900	14 000	
28	39	30	0.3	37	36 300	56 900	14 000	
29	38	20	0.3	36	21 600	37 200	14 000	
29	38	30	0.3	36	30 900	59 100	14 000	
30	40	20	0.3	38	25 100	40 100	13 000	
30	40	30	0.3	38	36 000	63 900	13 000	
30	42	17	0.3	40	23 700	30 700	13 000	
30	42	30	0.3	40	42 100	64 300	13 000	
30	44	25	0.3	42	37 900	52 100	13 000	
30	44	25	0.3	42	47 000	76 500	5 000	

1N=0.102kgf=0.2248lbs.  
1mm=0.03937inch

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

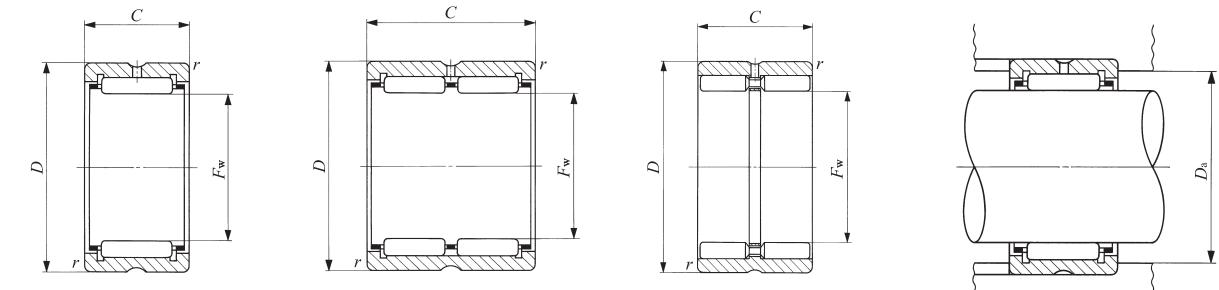

RNA49 TAF TR  
RNA69 ( $F_w \leq 35$ )

RNA69

GTR

Shaft dia. 32 – 40mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
32	—	—	—	TAF 324220	—	—	68
	—	—	—	TAF 324230	—	—	102
	RNA 49/28	—	—	—	—	—	76.5
	—	RNA 69/28	—	—	—	—	133
35	—	—	—	—	—	GTR 324530	152
	—	—	—	TAF 354520	—	—	73.5
	—	—	—	TAF 354530	—	—	112
	RNA 4906	—	—	—	—	—	72.5
	—	RNA 6906	—	—	—	—	125
37	—	—	—	TAF 374720	—	—	77.5
	—	—	—	TAF 374730	—	—	117
38	—	—	—	TAF 384820	—	—	79
	—	—	—	TAF 384830	—	—	119
	—	—	—	—	TR 385230	—	168
	—	—	—	—	—	GTR 385230	195
40	—	—	—	TAF 405020	—	—	83
	—	—	—	TAF 405030	—	—	125
	RNA 49/32	—	—	—	—	—	96
	—	RNA 69/32	—	—	—	—	172
	—	—	—	—	TR 405520	—	129
	—	—	—	—	—	GTR 405520	144

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	Boundary dimensions mm			Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
	$F_w$	$D$	$C$				
32	42	20	0.3	40	25 700	42 200	12 000
32	42	30	0.3	40	36 800	67 200	12 000
32	45	17	0.3	43	24 500	32 700	12 000
32	45	30	0.3	43	41 800	64 800	12 000
32	45	30	0.3	43	58 000	101 000	4 500
35	45	20	0.3	43	26 900	46 200	11 000
35	45	30	0.3	43	38 600	73 600	11 000
35	47	17	0.3	45	25 200	34 700	11 000
35	47	30	0.3	45	43 000	69 000	11 000
35	48	30	0.3	46	47 400	72 300	11 000
35	48	30	0.3	46	61 100	110 000	4 500
37	47	20	0.3	45	28 200	50 100	11 000
37	47	30	0.3	45	40 500	79 800	11 000
38	48	20	0.3	46	28 100	50 200	11 000
38	48	30	0.3	46	40 300	80 000	11 000
38	52	30	0.6	48	50 800	81 100	11 000
38	52	30	0.6	48	64 200	121 000	4 000
40	50	20	0.3	48	29 400	54 100	10 000
40	50	30	0.3	48	42 300	86 200	10 000
40	52	20	0.6	48	31 200	47 800	10 000
40	52	36	0.6	48	53 500	95 700	10 000
40	55	20	0.6	51	37 400	55 700	10 000
40	55	20	0.6	51	44 300	73 600	3 500

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

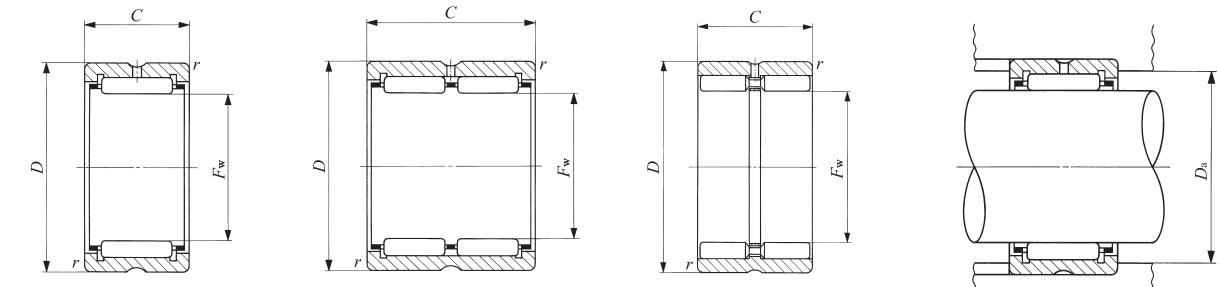

RNA49 TAF TR

RNA69

GTR

Shaft dia. 42 – 50mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
42	RNA 4907	—	—	TAF 425220	—	—	86.5
		—	—	TAF 425230	—	—	130
		—	—	—	—	—	113
		RNA 6907	—	—	—	—	200
	—	—	—	—	TR 425630	—	183
	—	—	—	—	—	GTR 425630	210
43	—	—	—	TAF 435320	—	—	88.5
	—	—	—	TAF 435330	—	—	133
45	RNA 49/38	—	—	TAF 455520	—	—	92
		—	—	TAF 455530	—	—	138
		—	—	—	—	—	120
		—	—	—	TR 455930	—	193
	—	—	—	—	—	GTR 455930	225
47	—	—	—	TAF 475720	—	—	95
	—	—	—	TAF 475730	—	—	144
48	RNA 4908	—	—	—	—	—	152
		—	—	—	TR 486230	—	205
		—	—	—	—	—	275
		—	—	—	—	GTR 486230	240
	—	—	—	TAF 506225	—	—	159
50	RNA 49/42	—	—	TAF 506235	—	—	225
		—	—	—	TR 506430	—	210
		—	—	—	—	—	174
		—	—	—	—	GTR 506430	245

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	Boundary dimensions mm			Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
	$F_w$	$D$	$C$				
42	52	20	0.3	50	29 900	56 200	9 500
42	52	30	0.3	50	43 000	89 400	9 500
42	55	20	0.6	51	32 000	50 100	9 500
42	55	36	0.6	51	54 900	100 000	9 500
42	56	30	0.6	52	53 800	90 100	9 500
42	56	30	0.6	52	67 500	133 000	3 500
43	53	20	0.3	51	30 500	58 200	9 500
43	53	30	0.3	51	43 800	92 600	9 500
45	55	20	0.3	53	31 000	60 200	9 000
45	55	30	0.3	53	44 600	95 800	9 000
45	58	20	0.6	54	33 600	54 600	9 000
45	59	30	0.6	55	55 100	94 800	9 000
45	59	30	0.6	55	70 300	142 000	3 500
47	57	20	0.3	55	31 500	62 200	8 500
47	57	30	0.3	55	45 200	99 100	8 500
48	62	22	0.6	58	41 600	67 400	8 500
48	62	30	0.6	58	56 300	99 500	8 500
48	62	40	0.6	58	71 300	135 000	8 500
48	62	30	0.6	58	72 700	154 000	3 000
50	62	25	0.3	60	43 000	85 300	8 000
50	62	35	0.3	60	58 000	125 000	8 000
50	64	30	0.6	60	57 700	104 000	8 000
50	65	22	0.6	61	42 500	70 300	8 000
50	64	30	0.6	60	74 600	158 000	3 000

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

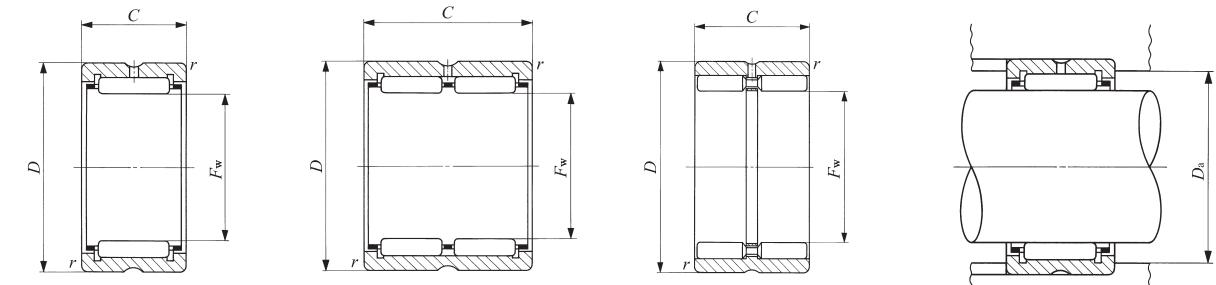

RNA49 TAF TR

RNA69

GTR

Shaft dia. 52 – 68mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
52	RNA 4909	—	RNA 6909	—	—	—	197
55	RNA 49/48	—	—	TAF 556825	—	—	355
		—	—	TAF 556835	—	—	193
		—	—	—	—	—	255
58	RNA 4910	—	RNA 6910	—	—	—	179
	—	—	—	—	—	—	320
		—	—	—	TR 587745	—	515
60	RNA 49/52	—	—	TAF 607225	—	—	590
		—	—	TAF 607235	—	—	187
		—	—	—	—	—	260
62	—	—	—	—	TR 628138	—	205
	—	—	—	—	—	GTR 628138	460
	—	—	—	—	—	—	520
63	RNA 4911	—	RNA 6911	—	—	—	265
	—	—	—	—	—	—	475
65	RNA 49/58	—	—	TAF 657825	—	—	225
		—	—	TAF 657835	—	—	315
		—	—	—	—	—	275
68	RNA 4912	—	—	TAF 688225	—	—	250
		—	—	TAF 688235	—	—	350
		—	—	—	—	—	285
		—	—	—	—	—	510

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	Boundary dimensions mm			$r^{(1)}$ s min	Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
	$F_w$	$D$	$C$					
52	68	22	0.6	0.6	64	43 500	73 300	7 500
52	68	40	0.6	0.6	64	74 600	147 000	7 500
55	68	25	0.3	0.3	66	45 400	94 000	7 500
55	68	35	0.3	0.3	66	61 200	138 000	7 500
55	70	22	0.6	0.6	66	44 300	76 300	7 500
58	72	22	0.6	0.6	68	46 200	82 100	7 000
58	72	40	0.6	0.6	68	79 200	164 000	7 000
58	77	45	1	1	72	104 000	191 000	7 000
58	77	45	1	1	72	135 000	280 000	2 500
60	72	25	0.3	0.3	70	47 500	103 000	6 500
60	72	35	0.3	0.3	70	64 100	151 000	6 500
60	75	22	0.6	0.6	71	47 100	85 100	6 500
62	81	38	1	1	76	92 000	166 000	6 500
62	81	38	1	1	76	118 000	241 000	2 500
63	80	25	1	1	75	57 600	97 200	6 500
63	80	45	1	1	75	98 700	194 000	6 500
65	78	25	0.6	0.6	74	49 600	112 000	6 000
65	78	35	0.6	0.6	74	67 000	164 000	6 000
65	82	25	1	1	77	58 900	101 000	6 000
68	82	25	0.6	0.6	78	54 800	117 000	6 000
68	82	35	0.6	0.6	78	72 000	166 000	6 000
68	85	25	1	1	80	60 200	105 000	6 000
68	85	45	1	1	80	103 000	211 000	6 000

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

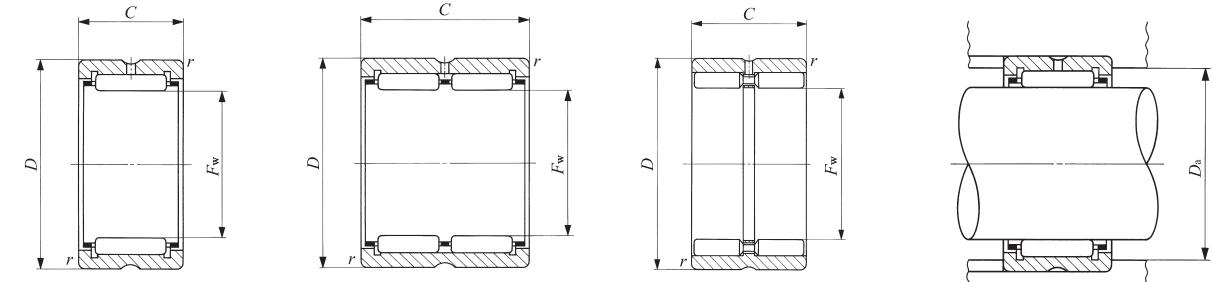

RNA49 TAF TR

RNA69

GTR

Shaft dia. 70 – 85mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
70	—	—	—	TAF 708525	—	—	280
	—	—	—	TAF 708535	—	—	395
	<b>RNA 49/62</b>		—	—	—	—	320
	—	—	—	—	TR 708945	GTR 708945	605
72	<b>RNA 4913</b>		—	—	—	—	690
	—	<b>RNA 6913</b>		—	—	—	325
	—	—	—	TAF 739025	—	—	585
73	—	—	—	TAF 739035	—	—	335
	—	—	—	—	—	—	475
75	—	—	—	TAF 759225	—	—	345
	—	—	—	TAF 759235	—	—	485
	<b>RNA 49/68</b>		—	—	—	—	470
	—	—	—	—	—	—	—
80	—	—	—	TAF 809525	—	—	315
	—	—	—	TAF 809535	—	—	445
	<b>RNA 4914</b>		—	—	—	—	495
	—	<b>RNA 6914</b>		—	—	—	910
83	—	—	—	—	TR 8310845	—	995
	—	—	—	—	—	GTR 8310845	1 090
85	—	<b>RNA 4915</b>		—	—	—	435
	—	—	—	TAF 8510525	—	—	525
	—	<b>RNA 6915</b>		—	—	—	610
	—	—	—	—	—	—	960

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	Boundary dimensions mm			Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
	$F_w$	$D$	$C$				
70	85	25	0.6	81	55 500	120 000	5 500
70	85	35	0.6	81	73 000	171 000	5 500
70	88	25	1	83	61 500	109 000	5 500
70	89	45	1	84	114 000	228 000	5 500
70	89	45	1	84	147 000	336 000	2 000
72	90	25	1	85	62 700	113 000	5 500
72	90	45	1	85	108 000	227 000	5 500
73	90	25	1	85	61 100	127 000	5 500
73	90	35	1	85	80 400	181 000	5 500
75	92	25	1	87	62 100	131 000	5 500
75	92	35	1	87	81 700	186 000	5 500
75	95	30	1	90	79 900	147 000	5 500
80	95	25	1	90	59 400	137 000	5 000
80	95	35	1	90	78 100	195 000	5 000
80	100	30	1	95	83 200	158 000	5 000
80	100	54	1	95	134 000	311 000	5 000
83	108	45	1	103	146 000	270 000	5 000
83	108	45	1	103	190 000	396 000	1 800
85	105	25	1	100	76 300	145 000	4 500
85	105	30	1	100	86 200	169 000	4 500
85	105	35	1	100	102 000	210 000	4 500
85	105	54	1	100	138 000	331 000	4 500

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

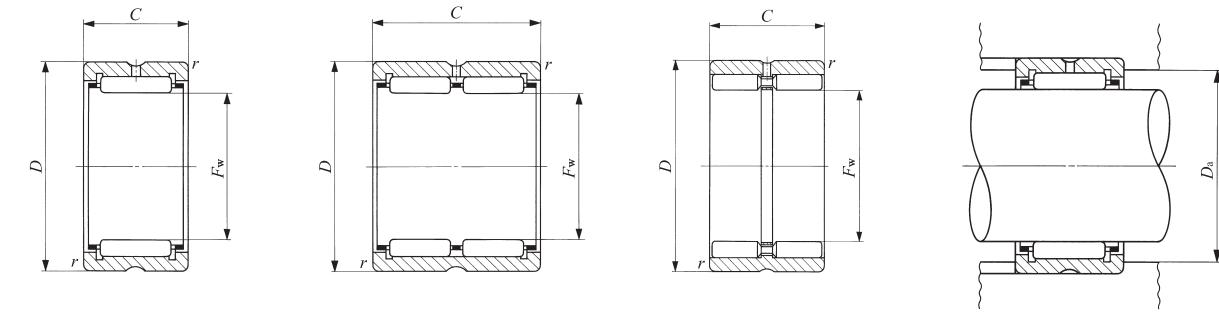

RNA49 TAF TR

RNA69

GTR

Shaft dia. 90 – 105mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
90	<b>RNA 4916</b>	—	—	TAF 9011025	—	—	455
		—	—	TAF 9011035	—	—	550
		—	—	—	—	—	640
		—	—	—	—	—	1 010
93	—	—	—	—	TR 9311850	—	1 210
						GTR 9311850	1 340
95	<b>RNA 49/82</b>	—	—	TAF 9511526	—	—	495
		—	—	TAF 9511536	—	—	575
		—	—	—	—	—	690
		—	—	—	TR 9512045	—	1 120
						GTR 9512045	1 230
100	<b>RNA 4917</b>	—	—	TAF 10012026	—	—	525
		—	—	TAF 10012036	—	—	705
		—	—	—	—	—	725
		—	—	—	—	—	1 300
				—	TR 10012550	—	1 290
						GTR 10012550	1 440
105	<b>RNA 4918</b>	—	—	TAF 10512526	—	—	545
		—	—	TAF 10512536	—	—	740
		—	—	—	—	—	760
		—	—	—	—	—	1 360

$F_w$	$D$	$C$	$r$ <sup>(1)</sup> s min	Boundary dimensions mm	Standard mounting dimension	Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(2)</sup>
					$D_a$ Max. mm	N	N	rpm
90	90	110	25	1	105	77 300	150 000	4 500
	90	110	30	1	105	87 300	175 000	4 500
	90	110	35	1	105	103 000	217 000	4 500
	90	110	54	1	105	143 000	351 000	4 500
93	93	118	50	1	113	165 000	329 000	4 500
	93	118	50	1	113	224 000	509 000	1 600
95	95	115	26	1	110	79 700	159 000	4 000
	95	115	30	1	110	90 000	186 000	4 000
	95	115	36	1	110	106 000	231 000	4 000
95	95	120	45	1.5	112	155 000	305 000	4 000
	95	120	45	1.5	112	204 000	455 000	1 600
100	100	120	26	1	115	82 400	168 000	4 000
	100	120	35	1.1	113.5	110 000	244 000	4 000
	100	120	36	1	115	110 000	244 000	4 000
	100	120	63	1.1	113.5	173 000	467 000	4 000
100	100	125	50	1.5	117	172 000	355 000	4 000
	100	125	50	1.5	117	234 000	549 000	1 500
105	105	125	26	1	120	84 700	178 000	4 000
	105	125	35	1.1	118.5	113 000	258 000	4 000
	105	125	36	1	120	113 000	258 000	4 000
	105	125	63	1.1	118.5	178 000	490 000	4 000

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$


<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

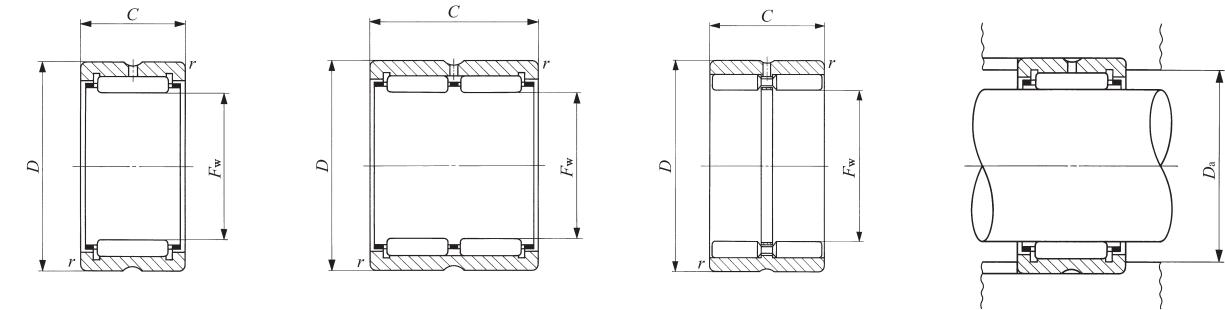

RNA49 RNA48  
TAF TR

RNA69

GTR

Shaft dia. 110 – 170mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
110	RNA 4919	—	—	TAF 11013030	—	—	660
		—	—	TAF 11013040	—	—	770
		—	—	—	—	—	880
		RNA 6919	—	—	—	—	1 420
	—	—	—	—	TR 11013550	—	1 400
115	RNA 4920	—	—	—	—	—	1 400
		—	—	—	TR 11515350	—	1 560
		—	—	—	—	—	2 350
		—	—	—	—	GTR 11515350	2 600
120	—	—	RNA 4822	—	—	—	790
125	RNA 4922	—	—	—	—	—	1 280
130	—	—	RNA 4824	—	—	—	850
135	RNA 4924	—	—	—	—	—	1 930
140	—	—	—	—	TR 14017860	—	3 320
145	—	—	RNA 4826	—	—	—	1 100
150	RNA 4926	—	—	—	—	—	2 360
155	—	—	RNA 4828	—	—	—	1 170
160	RNA 4928	—	—	—	—	—	2 500
165	—	—	RNA 4830	—	—	—	1 750
170	RNA 4930	—	—	—	—	—	4 090

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

(<sup>(2)</sup>) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	Boundary dimensions mm			Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
	$F_w$	$D$	$C$				
110	130	30	1	125	106 000	240 000	3 500
110	130	35	1.1	123.5	116 000	271 000	3 500
110	130	40	1	125	134 000	324 000	3 500
110	130	63	1.1	123.5	182 000	514 000	3 500
110	135	50	1.5	127	183 000	395 000	3 500
110	135	50	1.5	127	245 000	603 000	1 400
115	140	40	1.1	133.5	145 000	329 000	3 500
115	153	50	1.5	145	233 000	414 000	3 500
115	153	50	1.5	145	315 000	614 000	1 300
120	140	30	1	135	93 200	239 000	3 500
125	150	40	1.1	143.5	152 000	357 000	3 000
130	150	30	1	145	96 900	259 000	3 000
135	165	45	1.1	158.5	187 000	435 000	3 000
140	178	60	1.5	170	307 000	625 000	3 000
140	178	60	1.5	170	409 000	923 000	1 100
145	165	35	1.1	158.5	116 000	340 000	3 000
150	180	50	1.5	172	215 000	540 000	2 500
150	188	60	1.5	180	320 000	675 000	2 500
150	188	60	1.5	180	423 000	989 000	1 000
155	175	35	1.1	168.5	120 000	363 000	2 500
160	190	50	1.5	182	224 000	580 000	2 500
165	190	40	1.1	183.5	168 000	446 000	2 500
170	210	60	2	201	324 000	712 000	2 500

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

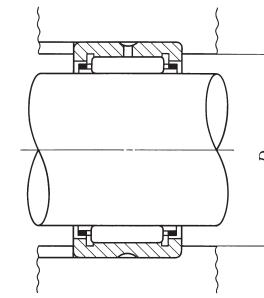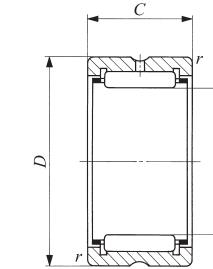

RNA49 RNA48

Shaft dia. 175 – 350mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
175	—	—	<b>RNA 4832</b>	—	—	—	1 850
180	<b>RNA 4932</b>	—	—	—	—	—	4 310
185	—	—	<b>RNA 4834</b>	—	—	—	2 700
190	<b>RNA 4934</b>	—	—	—	—	—	4 530
195	—	—	<b>RNA 4836</b>	—	—	—	2 840
205	<b>RNA 4936</b>	—	—	—	—	—	6 250
210	—	—	<b>RNA 4838</b>	—	—	—	3 380
215	<b>RNA 4938</b>	—	—	—	—	—	6 500
220	—	—	<b>RNA 4840</b>	—	—	—	3 520
225	<b>RNA 4940</b>	—	—	—	—	—	10 400
240	—	—	<b>RNA 4844</b>	—	—	—	3 820
245	<b>RNA 4944</b>	—	—	—	—	—	11 200
265	—	—	<b>RNA 4848</b>	—	—	—	5 670
265	<b>RNA 4948</b>	—	—	—	—	—	12 000
285	—	—	<b>RNA 4852</b>	—	—	—	6 070
290	<b>RNA 4952</b>	—	—	—	—	—	21 200
305	—	—	<b>RNA 4856</b>	—	—	—	9 750
310	<b>RNA 4956</b>	—	—	—	—	—	22 500
330	—	—	<b>RNA 4860</b>	—	—	—	13 200
340	<b>RNA 4960</b>	—	—	—	—	—	33 400
350	—	—	<b>RNA 4864</b>	—	—	—	14 100

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	$D$	$C$	$r_s$ <sup>(1)</sup> mm	Boundary dimensions mm	Standard mounting dimension	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
				( $r_s$ min)	$D_a$ Max. mm			
175	200	40	1.1	193.5	173 000	474 000	2 500	
180	220	60	2	211	337 000	761 000	1 900	
185	215	45	1.1	208.5	211 000	567 000	1 900	
190	230	60	2	221	347 000	810 000	1 900	
195	225	45	1.1	218.5	218 000	602 000	1 900	
205	250	69	2	241	434 000	989 000	1 900	
210	240	50	1.5	232	249 000	726 000	1 800	
215	260	69	2	251	440 000	1 020 000	1 700	
220	250	50	1.5	242	255 000	766 000	1 600	
225	280	80	2.1	269	518 000	1 120 000	1 600	
240	270	50	1.5	262	266 000	833 000	1 500	
245	300	80	2.1	289	536 000	1 200 000	1 400	
265	300	60	2	291	345 000	1 150 000	1 300	
265	320	80	2.1	309	565 000	1 320 000	1 300	
285	320	60	2	311	354 000	1 220 000	1 100	
290	360	100	2.1	349	847 000	1 900 000	1 100	
305	350	69	2	341	486 000	1 550 000	950	
310	380	100	2.1	369	877 000	2 040 000	950	
330	380	80	2.1	369	610 000	1 900 000	900	
340	420	118	3	407	1 130 000	2 650 000	850	
350	400	80	2.1	389	635 000	2 040 000	750	

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring

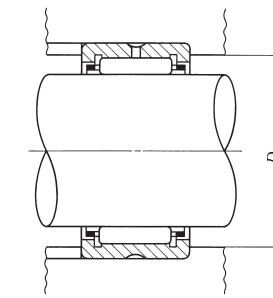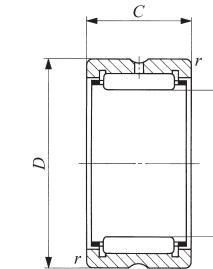

RNA49 RNA48

Shaft dia. 360 – 490mm

Shaft dia. mm	Identification number						Mass (Ref.) g
	RNA 49	RNA 69	RNA 48	TAF	TR	GTR	
360	<b>RNA 4964</b>	—	—	—	—	—	35 200
370	—	—	<b>RNA 4868</b>	—	—	—	14 800
380	<b>RNA 4968</b>	—	—	—	—	—	37 000
390	—	—	<b>RNA 4872</b>	—	—	—	15 600
400	<b>RNA 4972</b>	—	—	—	—	—	38 700
415	—	—	<b>RNA 4876</b>	—	—	—	27 900
430	<b>RNA 4976</b>	—	—	—	—	—	56 400
450	<b>RNA 4980</b>	—	—	—	—	—	58 800
470	<b>RNA 4984</b>	—	—	—	—	—	61 200
490	<b>RNA 4988</b>	—	—	—	—	—	86 900

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$F_w$	$D$	$C$	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm	Standard mounting dimension	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
					$D_a$ Max. mm			
360	440	118	3	427	1 170 000	2 830 000	750	
370	420	80	2.1	409	651 000	2 140 000	700	
380	460	118	3	447	1 220 000	3 020 000	700	
390	440	80	2.1	429	680 000	2 320 000	650	
400	480	118	3	467	1 260 000	3 200 000	600	
415	480	100	2.1	469	951 000	2 860 000	600	
430	520	140	4	504	1 540 000	4 030 000	500	
450	540	140	4	524	1 590 000	4 270 000	500	
470	560	140	4	544	1 640 000	4 510 000	500	
490	600	160	4	584	1 910 000	5 140 000	400	

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

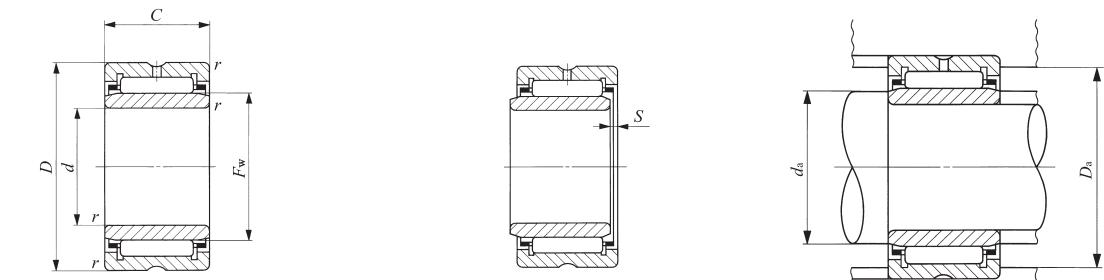

NA49 TAFI  
NA69 ( $d \leq 30$ )

Shaft dia. 5 – 12mm

Shaft dia. mm	Identification number						Mass (Ref.) g	$d$
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
5	NA 495	—	—	TAFI 51512	—	—	7.3	5
	—	—	—	TAFI 51516	—	—	11.9	5
	—	—	—	—	—	—	16.7	5
6	NA 496	—	—	TAFI 61612	—	—	9.1	6
	—	—	—	TAFI 61616	—	—	13	6
	—	—	—	—	—	—	17.5	6
7	NA 497	—	—	TAFI 71712	—	—	11.2	7
	—	—	—	TAFI 71716	—	—	14.3	7
	—	—	—	—	—	—	19.2	7
8	NA 498	—	—	—	—	—	15	8
9	—	—	—	TAFI 91912	—	—	16.7	9
	—	—	—	TAFI 91916	—	—	22.5	9
	NA 499	—	—	—	—	—	16.7	9
10	NA 4900	—	—	—	—	—	24	10
	—	—	—	TAFI 102216	—	—	30	10
	—	—	—	TAFI 102220	—	—	38	10
12	NA 4901	—	—	—	—	—	26.5	12
	—	—	—	TAFI 122416	—	—	33.5	12
	—	—	—	TAFI 122420	—	—	42.5	12
	NA 6901	—	—	—	—	—	44.5	12

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. TAFI series with a bore diameter  $d$  of 22 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.


$D$	$C$	$B$	$r_s$ min <sup>(1)</sup>	$F_w$	$S$ <sup>(2)</sup>	Standard mounting dimensions mm		Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring	
						Min.	Max.					
13	10	—	0.15	7	0.5	6.2	6.7	11.8	2 960	2 690	60 000	LRT 5710
15	12	—	0.2	8	0.5	6.6	7.7	13.4	5 060	4 690	50 000	LRT 5812
15	16	—	0.2	8	0.5	6.6	7.7	13.4	7 080	7 220	50 000	LRT 5816
15	10	—	0.15	8	0.5	7.2	7.7	13.8	3 960	3 420	50 000	LRT 6810
16	12	—	0.2	9	0.5	7.6	8.7	14.4	5 490	5 330	45 000	LRT 6912
16	16	—	0.2	9	0.5	7.6	8.7	14.4	7 680	8 210	45 000	LRT 6916
17	10	—	0.15	9	0.5	8.2	8.7	15.8	4 530	3 650	45 000	LRT 7910
17	12	—	0.2	10	0.5	8.6	9.7	15.4	5 880	5 970	40 000	LRT 71012
17	16	—	0.2	10	0.5	8.6	9.7	15.4	8 230	9 190	40 000	LRT 71016
19	11	—	0.2	10	0.5	9.6	9.9	17.4	6 180	5 030	40 000	LRT 81011
19	12	—	0.3	12	0.5	11	11.5	17	6 610	7 260	35 000	LRT 91212
19	16	—	0.3	12	0.5	11	11.5	17	9 250	11 200	35 000	LRT 91216
20	11	—	0.3	12	0.5	11	11.5	18	6 600	6 310	35 000	LRT 91211
22	13	—	0.3	14	0.5	12	13	20	9 230	10 100	30 000	LRT 101413
22	16	—	0.3	14	0.5	12	13	20	11 700	13 700	30 000	LRT 101416
22	20	—	0.3	14	0.5	12	13	20	14 800	18 600	30 000	LRT 101420
24	13	—	0.3	16	0.5	14	15	22	9 660	11 100	25 000	LRT 121613
24	16	—	0.3	16	0.5	14	15	22	12 300	15 100	25 000	LRT 121616
24	20	—	0.3	16	0.5	14	15	22	15 500	20 400	25 000	LRT 121620
24	22	—	0.3	16	0.5	14	15	22	17 100	23 000	25 000	LRT 121622

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Inner Ring

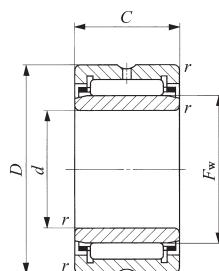



NA49 TAFI  
NA69 ( $d \leq 30$ )

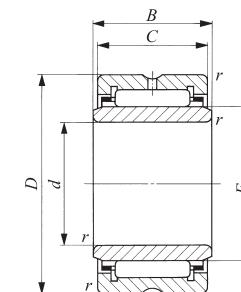

TRI

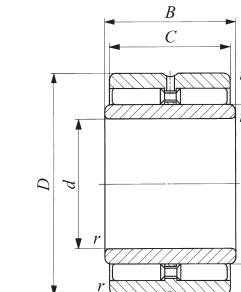

GTRI

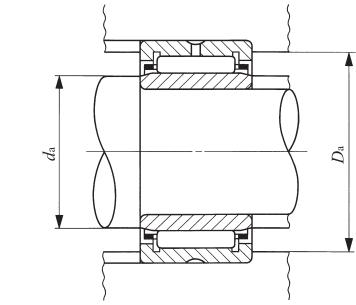

NA  
TAFI  
TRI  
BRI

Shaft dia. 15 – 22mm

Shaft dia. mm	Identification number						Mass (Ref.) g	$d$
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
15	NA 4902	—	—	TAFI 152716	—	—	39.5	15
		—	—	TAFI 152720	—	—	50	15
		—	—	—	—	—	35	15
		—	NA 6902	—	—	—	61	15
	NA 6902	—	—	—	TRI 153320	—	81	15
		—	—	—	—	GTRI 153320	90.5	15
17	NA 4903	—	—	TAFI 172916	—	—	43.5	17
		—	—	TAFI 172920	—	—	54	17
		—	—	—	—	—	39	17
		—	NA 6903	—	—	—	67	17
	NA 6903	—	—	—	TRI 173425	—	104	17
		—	—	—	—	GTRI 173425	117	17
20	NA 4904	—	—	TAFI 203216	—	—	48.5	20
		—	—	TAFI 203220	—	—	61	20
		—	—	—	—	—	78.5	20
		—	NA 6904	—	—	—	136	20
	NA 6904	—	—	—	TRI 203820	—	99	20
		—	—	—	TRI 203825	—	124	20
22	NA 49/22	—	—	TAFI 223416	—	—	52	22
		—	—	TAFI 223420	—	—	67.5	22
		—	—	—	—	—	87	22
		—	NA 69/22	—	—	—	152	22

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks1. TAFI series with a bore diameter  $d$  of 22 mm or less have no oil hole. In others, the outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$D$	$C$	$B$	$r_s$ min <sup>(1)</sup>	$F_w$	$S$ <sup>(2)</sup>	Standard mounting dimensions mm		Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring	
						Min.	Max.					
27	16	—	0.3	19	0.5	17	18	25	14 000	18 700	20 000	LRT 151916
27	20	—	0.3	19	0.5	17	18	25	17 700	25 300	20 000	LRT 151920
28	13	—	0.3	20	0.3	17	19	26	10 900	13 800	20 000	LRT 152013
28	23	—	0.3	20	0.3	17	19	26	19 300	28 800	20 000	LRT 152023
33	20	20.5	0.3	20	0.3	17	19	31	24 300	26 500	20 000	LRT 152020
33	20	20.5	0.3	20	—	17	19	31	29 200	37 200	7 500	LRTZ 152020
29	16	—	0.3	21	0.5	19	20	27	14 400	20 000	19 000	LRT 172116
29	20	—	0.3	21	0.5	19	20	27	18 200	27 100	19 000	LRT 172120
30	13	—	0.3	22	0.3	19	21	28	11 700	15 600	18 000	LRT 172213
30	23	—	0.3	22	0.3	19	21	28	20 800	32 500	18 000	LRT 172223
34	25	25.5	0.3	22	0.5	19	21	32	29 100	36 800	18 000	LRT 172225
34	25	25.5	0.3	22	—	19	21	32	37 900	57 800	7 000	LRTZ 172225
32	16	—	0.3	24	0.5	22	23	30	15 300	22 500	17 000	LRT 202416
32	20	—	0.3	24	0.5	22	23	30	19 400	30 500	17 000	LRT 202420
37	17	—	0.3	25	0.5	22	24	35	21 000	25 000	16 000	LRT 202517
37	30	—	0.3	25	0.5	22	24	35	35 400	48 900	16 000	LRT 202530
38	20	20.5	0.3	25	0.3	22	24	36	28 900	35 000	16 000	LRT 202520
38	25	25.5	0.3	25	0.5	22	24	36	34 800	44 400	16 000	LRT 202525
38	20	20.5	0.3	25	—	22	24	36	33 300	46 500	6 000	LRTZ 202520
38	25	25.5	0.3	25	—	22	24	36	42 400	63 700	6 000	LRTZ 202525
34	16	—	0.3	26	0.5	24	25	32	16 300	24 900	15 000	LRT 222616
34	20	—	0.3	26	0.5	24	25	32	20 600	33 800	15 000	LRT 222620
39	17	—	0.3	28	1	24	27	37	21 400	28 900	14 000	LRT 222817
39	30	—	0.3	28	0.5	24	27	37	36 300	56 900	14 000	LRT 222830


## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

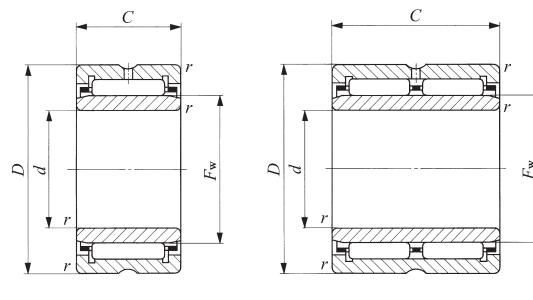

NA49 TAFI  
NA69 ( $d \leq 30$ )

NA69

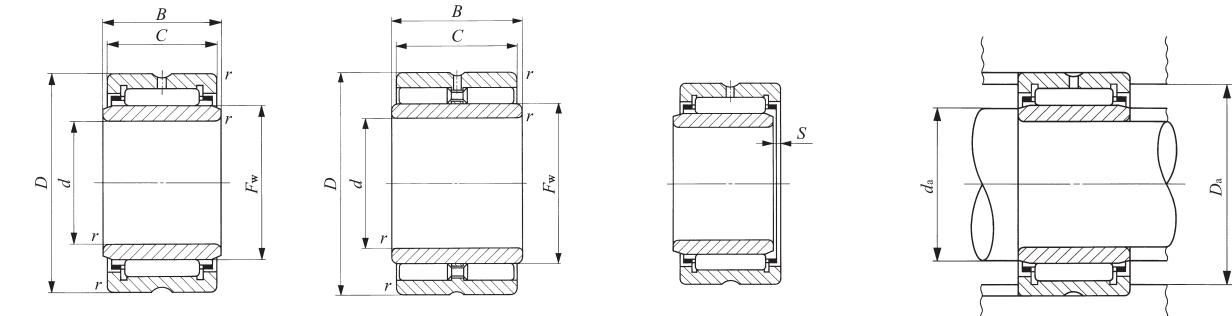

TRI

GTRI

Shaft dia. 25 – 32mm

Shaft dia. mm	Identification number						Mass (Ref.) g	$d$
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
25	—	—	—	TAFI 253820	—	—	82	25
	—	—	—	TAFI 253830	—	—	123	25
	—	—	—	—	—	—	92.5	25
	—	—	—	—	—	—	160	25
	NA 4905		NA 6905		TRI 254425		157	25
	—		—		GTRI 254425		175	25
28	—	—	—	TAFI 284220	—	—	96.5	28
	—	—	—	TAFI 284230	—	—	145	28
	—	—	—	—	—	—	101	28
	—	—	—	—	—	—	176	28
	NA 49/28		NA 69/28		GTRI 284530		196	28
	—		—		—		—	
30	—	—	—	TAFI 304520	—	—	112	30
	—	—	—	TAFI 304530	—	—	171	30
	—	—	—	—	—	—	106	30
	—	—	—	—	—	—	184	30
	—	—	—	—	TRI 304830	—	199	30
	—	—	—	—	GTRI 304830	—	225	30
32	—	—	—	TAFI 324720	—	—	121	32
	—	—	—	TAFI 324730	—	—	180	32
	—	—	—	—	—	—	165	32
	—	—	—	—	TRI 325230	—	245	32
	—	—	—	—	—	—	295	32
	—	—	—	—	—	GTRI 325230	—	270

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

$D$	$C$	$B$	$r_s$ min <sup>(1)</sup>	$F_w$	$S$ <sup>(2)</sup>	Boundary dimensions mm		Standard mounting dimensions mm		Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring
						Min.	Max.	$d_a$ Max.	$D_a$ Max.				
38	20	—	0.3	29	0.5	27	28	36	21 600	37 200	14 000	LRT 252920	
38	30	—	0.3	29	1	27	28	36	30 900	59 100	14 000	LRT 252930	
42	17	—	0.3	30	0.5	27	29	40	23 700	30 700	13 000	LRT 253017	
42	30	—	0.3	30	0.5	27	29	40	42 100	64 300	13 000	LRT 253030	
44	25	25.5	0.3	30	0.5	27	29	42	37 900	52 100	13 000	LRT 253025	
44	25	25.5	0.3	30	—	27	29	42	47 000	76 500	5 000	LRTZ 253025	
42	20	—	0.3	32	0.5	30	31	40	25 700	42 200	12 000	LRT 283220	
42	30	—	0.3	32	1	30	31	40	36 800	67 200	12 000	LRT 283230	
45	17	—	0.3	32	1	30	31	43	24 500	32 700	12 000	LRT 283217	
45	30	—	0.3	32	1	30	31	43	41 800	64 800	12 000	LRT 283230	
45	30	30.5	0.3	32	—	30	31	43	58 000	101 000	4 500	LRTZ 283230	
45	20	—	0.3	35	0.3	32	34	43	26 900	46 200	11 000	LRT 303520	
45	30	—	0.3	35	0.5	32	34	43	38 600	73 600	11 000	LRT 303530	
47	17	—	0.3	35	0.5	32	34	45	25 200	34 700	11 000	LRT 303517	
47	30	—	0.3	35	0.5	32	34	45	43 000	69 000	11 000	LRT 303530	
48	30	30.5	0.3	35	1	32	34	46	47 400	72 300	11 000	LRT 303530-1	
48	30	30.5	0.3	35	—	32	34	46	61 100	110 000	4 500	LRTZ 303530	
47	20	—	0.3	37	0.3	34	36	45	28 200	50 100	11 000	LRT 323720	
47	30	—	0.3	37	0.5	34	36	45	40 500	79 800	11 000	LRT 323730	
52	20	—	0.6	40	0.5	36	39	48	31 200	47 800	10 000	LRT 324020	
52	30	30.5	0.6	38	0.5	36	37	48	50 800	81 100	11 000	LRT 323830	
52	36	—	0.6	40	0.3	36	39	48	53 500	95 700	10 000	LRT 324036	
52	30	30.5	0.6	38	—	36	37	48	64 200	121 000	4 000	LRTZ 323830	


## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

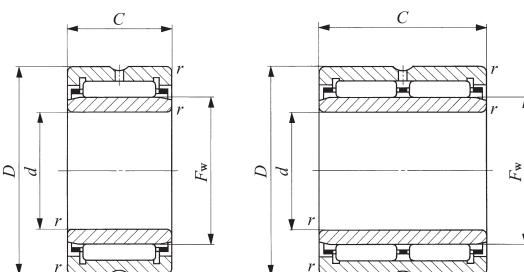

NA49 TAFI

NA69

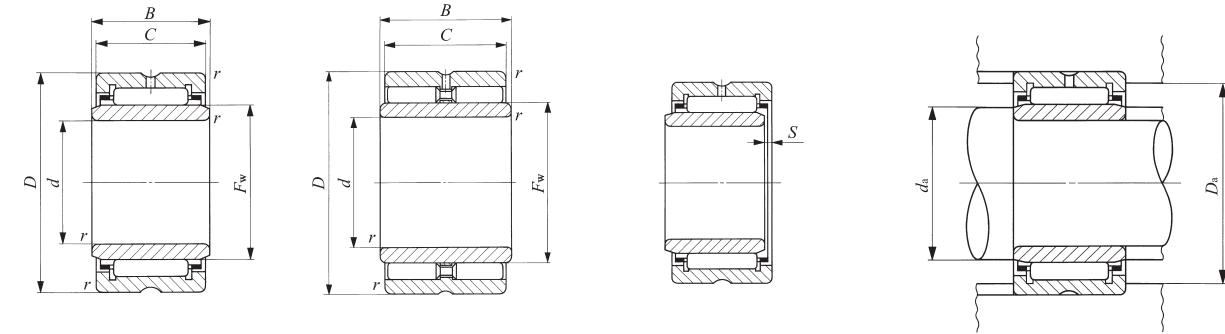

TRI

GTRI

Shaft dia. 35 – 45mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
35	NA 4907	—	—	TAFI 355020	—	—	129	35
		—	—	TAFI 355030	—	—	192	35
		—	—	—	—	—	178	35
		NA 6907	—	—	—	—	320	35
	—	—	—	—	TRI 355630	—	280	35
	—	—	—	—	—	GTRI 355520	191	35
	—	—	—	—	—	GTRI 355630	310	35
	—	—	—	TAFI 385320	—	—	136	38
38	—	—	—	TAFI 385330	—	—	205	38
	—	—	—	—	—	—	143	40
	—	—	—	TAFI 405520	—	—	215	40
	—	—	—	TAFI 405530	—	—	270	40
	NA 4908	—	—	—	TRI 405930	—	245	40
		—	—	—	—	—	440	40
		—	—	—	—	GTRI 405930	300	40
		NA 6908	—	—	—	—	—	—
42	—	—	—	TAFI 425720	—	—	149	42
	—	—	—	TAFI 425730	—	—	225	42
	—	—	—	—	TRI 426230	—	305	42
	—	—	—	—	—	GTRI 426230	340	42
	—	—	—	TAFI 456225	—	—	230	45
	—	—	—	TAFI 456235	—	—	320	45
45	—	—	—	—	TRI 456430	—	300	45
	—	—	—	—	—	—	285	45
	NA 4909	—	—	—	—	—	520	45
		—	—	—	—	—	335	45
		NA 6909	—	—	—	GTRI 456430	—	—

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D	C	B	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm		Standard mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring	
				$F_w$	<sup>(2)</sup> S	Min. $d_a$	Max. $D_a$					
50	20	—	0.3	40	0.3	37	39	48	29 400	54 100	10 000	LRT 354020
50	30	—	0.3	40	0.5	37	39	48	42 300	86 200	10 000	LRT 354030
55	20	—	0.6	42	0.5	39	41	51	32 000	50 100	9 500	LRT 354220
55	36	—	0.6	42	0.3	39	41	51	54 900	100 000	9 500	LRT 354236
56	30	30.5	0.6	42	0.5	39	41	52	53 800	90 100	9 500	LRT 354230
55	20	20.5	0.6	40	—	39	39.5	51	44 300	73 600	3 500	LRTZ 354020
56	30	30.5	0.6	42	—	39	41	52	67 500	133 000	3 500	LRTZ 354230
53	20	—	0.3	43	0.3	40	42	51	30 500	58 200	9 500	LRT 384320
53	30	—	0.3	43	0.5	40	42	51	43 800	92 600	9 500	LRT 384330
55	20	—	0.3	45	0.3	42	44	53	31 000	60 200	9 000	LRT 404520
55	30	—	0.3	45	0.5	42	44	53	44 600	95 800	9 000	LRT 404530
59	30	30.5	0.6	45	1	44	44.5	55	55 100	94 800	9 000	LRT 404530-1
62	22	—	0.6	48	0.5	44	47	58	41 600	67 400	8 500	LRT 404822
62	40	—	0.6	48	0.3	44	47	58	71 300	135 000	8 500	LRT 404840
59	30	30.5	0.6	45	—	44	44.5	55	70 300	142 000	3 500	LRTZ 404530
57	20	—	0.3	47	0.3	44	46	55	31 500	62 200	8 500	LRT 424720
57	30	—	0.3	47	0.5	44	46	55	45 200	99 100	8 500	LRT 424730
62	30	30.5	0.6	48	0.5	46	47	58	56 300	99 500	8 500	LRT 424830
62	30	30.5	0.6	48	—	46	47	58	72 700	154 000	3 000	LRTZ 424830
62	25	—	0.3	50	0.5	47	49	60	43 000	85 300	8 000	LRT 455025
62	35	—	0.3	50	1	47	49	60	58 000	125 000	8 000	LRT 455035
64	30	30.5	0.6	50	1	49	49.5	60	57 700	104 000	8 000	LRT 455030
68	22	—	0.6	52	0.5	49	51	64	43 500	73 300	7 500	LRT 455222
68	40	—	0.6	52	0.3	49	51	64	74 600	147 000	7 500	LRT 455240
64	30	30.5	0.6	50	—	49	49.5	60	74 600	158 000	3 000	LRTZ 455030


## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

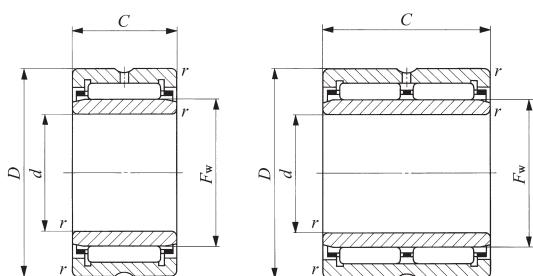

NA49 TAFI

NA69

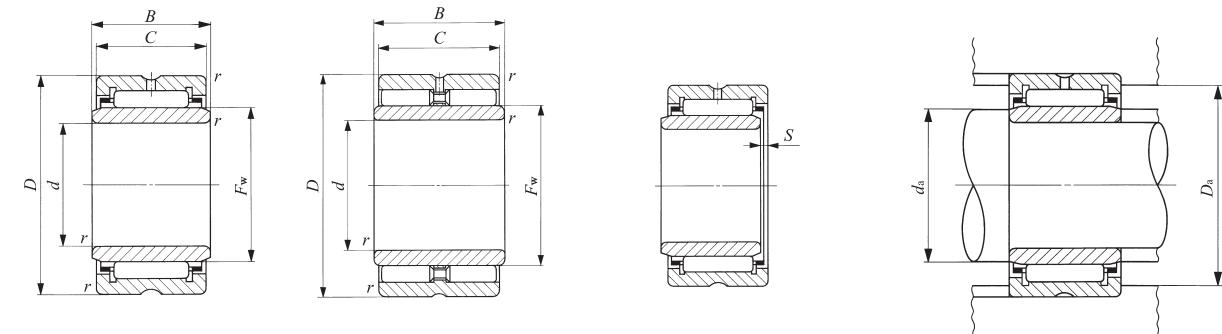

TRI

GTRI

Shaft dia. 50 – 70mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
50	—	—	—	TAFI 506825	—	—	270	50
	—	—	—	TAFI 506835	—	—	365	50
	NA 4910	—	—	—	—	—	295	50
		NA 6910	—	—	—	—	530	50
	—	—	—	—	TRI 507745	—	755	50
	—	—	—	—	—	GTRI 507745	825	50
55	—	—	—	TAFI 557225	—	—	275	55
	—	—	—	TAFI 557235	—	—	380	55
	NA 4911	—	—	—	—	—	410	55
		NA 6911	—	—	—	—	730	55
	—	—	—	—	TRI 558138	—	650	55
	—	—	—	—	—	GTRI 558138	710	55
60	—	—	—	TAFI 608225	—	—	395	60
	—	—	—	TAFI 608235	—	—	560	60
	NA 4912	—	—	—	—	—	440	60
		NA 6912	—	—	—	—	785	60
	—	—	—	—	TRI 608945	—	960	60
	—	—	—	—	—	GTRI 608945	1 050	60
65	NA 4913	—	—	—	—	—	470	65
		—	—	TAFI 659035	—	—	710	65
		—	—	—	—	—	840	65
70	—	—	—	TAFI 709525	—	—	540	70
	—	—	—	TAFI 709535	—	—	755	70
	NA 4914	—	—	—	—	—	765	70
		NA 6914	—	—	—	—	1 400	70

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D	C	B	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm		Standard mounting dimensions mm		Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring
				$F_w$ <sup>(2)</sup>	<i>S</i> <sup>(2)</sup>	Min. <i>d</i> <sub>a</sub>	Max. <i>D</i> <sub>a</sub>				
68	25	—	0.3	55	0.5	52	54	66	45 400	94 000	LRT 505525
	35	—	0.3	55	1	52	54	66	61 200	138 000	LRT 505535
	72	22	0.6	58	0.5	54	57	68	46 200	82 100	LRT 505822
	40	—	0.6	58	0.3	54	57	68	79 200	164 000	LRT 505840
77	45	45.5	1	58	2	55	57	72	104 000	191 000	LRT 505845
	45	45.5	1	58	—	55	57	72	135 000	280 000	LRTZ 505845
72	25	—	0.3	60	0.5	57	59	70	47 500	103 000	LRT 556025
	35	—	0.3	60	1	57	59	70	64 100	151 000	LRT 556035
	25	—	1	63	1	60	61	75	57 600	97 200	LRT 556325
	45	—	1	63	0.5	60	61	75	98 700	194 000	LRT 556345
81	38	38.5	1	62	1.5	60	60.5	76	92 000	166 000	LRT 556238
	38	38.5	1	62	—	60	60.5	76	118 000	241 000	LRTZ 556238
82	25	—	0.6	68	0.3	64	66	78	54 800	117 000	LRT 606825
	35	—	0.6	68	1	64	66	78	72 000	166 000	LRT 606835
	25	—	1	68	1	65	66	80	60 200	105 000	LRT 606825-1
	45	—	1	68	0.5	65	66	80	103 000	211 000	LRT 606845
89	45	45.5	1	70	2	65	68	84	114 000	228 000	LRT 607045
	45	45.5	1	70	—	65	68	84	147 000	336 000	LRTZ 607045
90	25	—	1	72	1	70	70.5	85	62 700	113 000	LRT 657225
	35	—	1	73	1	70	71	85	80 400	181 000	LRT 657335
	45	—	1	72	0.5	70	70.5	85	108 000	227 000	LRT 657245
95	25	—	1	80	0.3	75	78	90	59 400	137 000	LRT 708025
	35	—	1	80	1	75	78	90	78 100	195 000	LRT 708035
	30	—	1	80	1.5	75	78	95	83 200	158 000	LRT 708030
	54	—	1	80	1	75	78	95	134 000	311 000	LRT 708054


## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

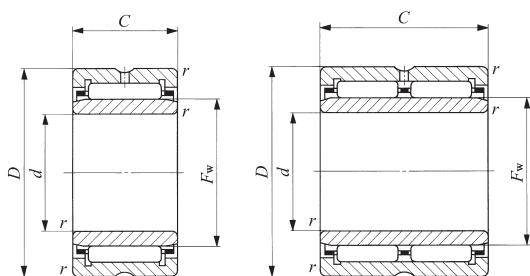

NA49 TAFI

NA69

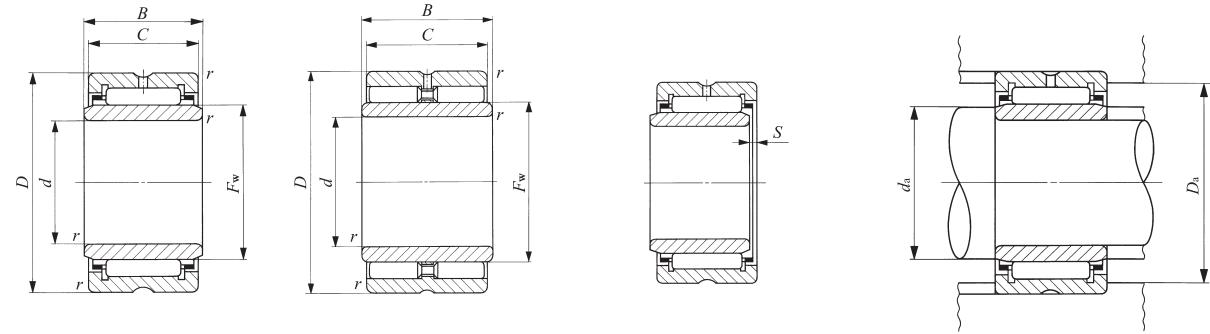

TRI

GTRI

Shaft dia. 75 – 90mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
75	NA 4915	—	—	TAFI 7510525	—	—	675	75
		—	—	TAFI 7510535	—	—	810	75
		—	—	—	—	—	945	75
	NA 6915	—	—	—	—	—	1 480	75
		—	—	—	TRI 7510845	—	1 340	75
		—	—	—	—	GTRI 7510845	1 440	75
80	NA 4916	—	—	TAFI 8011025	—	—	710	80
		—	—	TAFI 8011035	—	—	855	80
		—	—	—	—	—	995	80
	NA 6916	—	—	—	—	—	1 560	80
		—	—	—	—	—	—	—
		—	—	—	—	—	—	—
85	NA 4917	—	—	TAFI 8511526	—	—	775	85
		—	—	TAFI 8511536	—	—	1 080	85
		—	—	—	—	—	1 280	85
		—	—	—	—	—	2 340	85
	NA 6917	—	—	—	—	—	—	—
		—	—	—	—	—	—	—
90	NA 4918	—	—	TAFI 9012026	—	—	820	90
		—	—	TAFI 9012036	—	—	1 140	90
		—	—	—	—	—	1 350	90
	NA 6918	—	—	—	TRI 9012550	—	1 870	90
		—	—	—	—	—	2 460	90
		—	—	—	—	—	2 020	90

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D	C	B	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm		Standard mounting dimensions mm		Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring	
				$F_w$ <sup>(2)</sup>	<i>S</i>	<i>d</i> <sub>a</sub> Min.	<i>d</i> <sub>a</sub> Max.					
105	25	—	1	85	0.5	80	83	100	76 300	145 000	4 500	LRT 758525
	30	—	1	85	1.5	80	83	100	86 200	169 000	4 500	LRT 758530
	35	—	1	85	1.5	80	83	100	102 000	210 000	4 500	LRT 758535
	54	—	1	85	1	80	83	100	138 000	331 000	4 500	LRT 758554
108	45	45.5	1	83	2.5	80	81	103	146 000	270 000	5 000	LRT 758345
	45	45.5	1	83	—	80	81	103	190 000	396 000	1 800	LRTZ 758345
110	25	—	1	90	0.5	85	88	105	77 300	150 000	4 500	LRT 809025
	30	—	1	90	1.5	85	88	105	87 300	175 000	4 500	LRT 809030
	35	—	1	90	1.5	85	88	105	103 000	217 000	4 500	LRT 809035
	54	—	1	90	1	85	88	105	143 000	351 000	4 500	LRT 809054
115	26	—	1	95	1	90	93	110	79 700	159 000	4 000	LRT 859526
	36	—	1	95	2	90	93	110	106 000	231 000	4 000	LRT 859536
	35	—	1.1	100	1	91.5	98	113.5	110 000	244 000	4 000	LRT 8510035
	63	—	1.1	100	0.5	91.5	98	113.5	173 000	467 000	4 000	LRT 8510063
118	50	50.5	1	93	3	90	91	113	165 000	329 000	4 500	LRT 859350
	45	45.5	1.5	95	2.5	93	93.5	112	155 000	305 000	4 000	LRT 859545
	50	50.5	1	93	—	90	91	113	224 000	509 000	1 600	LRTZ 859350
	45	45.5	1.5	95	—	93	93.5	112	204 000	455 000	1 600	LRTZ 859545
120	26	—	1	100	1	95	98	115	82 400	168 000	4 000	LRT 9010026
	36	—	1	100	2	95	98	115	110 000	244 000	4 000	LRT 9010036
	35	—	1.1	105	1	96.5	103	118.5	113 000	258 000	4 000	LRT 9010535
125	50	50.5	1.5	100	3	98	98.5	117	172 000	355 000	4 000	LRT 9010050
	63	—	1.1	105	0.5	96.5	103	118.5	178 000	490 000	4 000	LRT 9010563
	50	50.5	1.5	100	—	98	98.5	117	234 000	549 000	1 500	LRTZ 9010050


## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

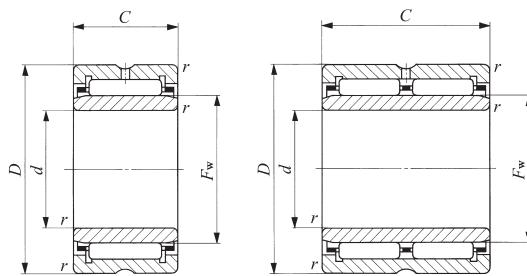


NA49 TAFI  
NA48

NA69

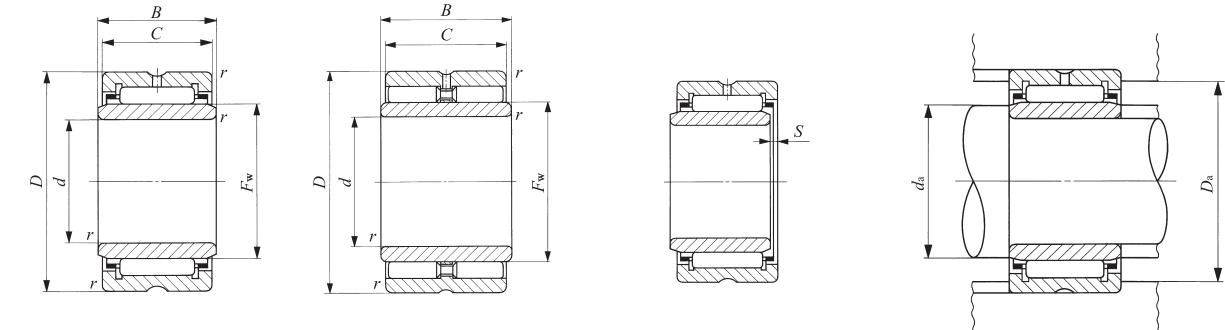

TRI

GTRI

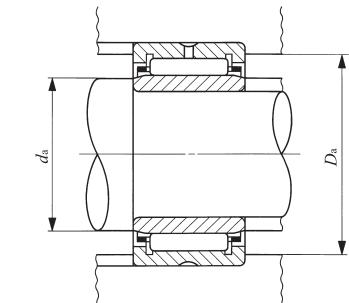

Shaft dia. 95 – 150mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
95	—	—	—	TAFI 9512526	—	—	860	95
	NA 4919	—	—	TAFI 9512536	—	—	1 190	95
	—	NA 6919	—	—	—	—	1 420	95
	—	—	—	—	—	—	2 580	95
100	—	—	—	TAFI 10013030	—	—	1 040	100
	—	—	—	TAFI 10013040	—	—	1 380	100
	NA 4920	—	—	—	TRI 10013550	—	2 040	100
	—	—	—	—	—	GTRI 10013550	1 960	100
105	—	—	—	—	TRI 10515350	—	2 200	100
	—	—	—	—	GTRI 10515350	—	3 020	105
110	—	—	NA 4822	—	—	—	1 200	110
	NA 4922	—	—	—	—	—	2 120	110
120	—	—	NA 4824	—	—	—	1 300	120
	NA 4924	—	—	—	—	—	2 960	120
125	—	—	—	—	TRI 12517860	—	4 780	125
	—	—	—	—	GTRI 12517860	—	5 180	125
130	—	—	NA 4826	—	—	—	1 960	130
	NA 4926	—	—	—	—	—	4 030	130
135	—	—	—	—	TRI 13518860	—	5 100	135
	—	—	—	—	GTRI 13518860	—	5 530	135
140	—	—	NA 4828	—	—	—	2 100	140
	NA 4928	—	—	—	—	—	4 290	140
150	—	—	NA 4830	—	—	—	2 880	150
	NA 4930	—	—	—	—	—	6 380	150

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D	C	B	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm		Standard mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring	
				$F_w$ <sup>(2)</sup>	S	d <sub>a</sub> Min.	d <sub>a</sub> Max.					
125	26	—	1	105	1	100	103	120	84 700	178 000	4 000	LRT 9510526
125	36	—	1	105	2	100	103	120	113 000	258 000	4 000	LRT 9510536
130	35	—	1.1	110	1	101.5	108	123.5	116 000	271 000	3 500	LRT 9511035
130	63	—	1.1	110	0.5	101.5	108	123.5	182 000	514 000	3 500	LRT 9511063
130	30	—	1	110	0.5	105	108	125	106 000	240 000	3 500	LRT 10011030
130	40	—	1	110	1.5	105	108	125	134 000	324 000	3 500	LRT 10011040
135	50	50.5	1.5	110	3	108	108.5	127	183 000	395 000	3 500	LRT 10011050
140	40	—	1.1	115	1	106.5	113	133.5	145 000	329 000	3 500	LRT 10011540
135	50	50.5	1.5	110	—	108	108.5	127	245 000	603 000	1 400	LRTZ 10011050
153	50	50.5	1.5	115	3	113	113.5	145	233 000	414 000	3 500	LRT 10511550
153	50	50.5	1.5	115	—	113	113.5	145	315 000	614 000	1 300	LRTZ 10511550
140	30	—	1	120	1	115	118	135	93 200	239 000	3 500	LRT 11012030
150	40	—	1.1	125	1	116.5	123	143.5	152 000	357 000	3 000	LRT 11012540
150	30	—	1	130	1	125	128	145	96 900	259 000	3 000	LRT 12013030
165	45	—	1.1	135	2	126.5	133	158.5	187 000	435 000	3 000	LRT 12013545
178	60	60.5	1.5	140	2.5	133	138	170	307 000	625 000	3 000	LRT 12514060
178	60	60.5	1.5	140	—	133	138	170	409 000	923 000	1 100	LRTZ 12514060
165	35	—	1.1	145	1	136.5	143	158.5	116 000	340 000	3 000	LRT 13014535
180	50	—	1.5	150	2.5	138	148	172	215 000	540 000	2 500	LRT 13015050
188	60	60.5	1.5	150	2.5	143	148	180	320 000	675 000	2 500	LRT 13515060
188	60	60.5	1.5	150	—	143	148	180	423 000	989 000	1 000	LRTZ 13515060
175	35	—	1.1	155	1	146.5	153	168.5	120 000	363 000	2 500	LRT 14015535
190	50	—	1.5	160	2.5	148	158	182	224 000	580 000	2 500	LRT 14016050
190	40	—	1.1	165	1.5	156.5	163	183.5	168 000	446 000	2 500	LRT 15016540
210	60	—	2	170	3	159	168	201	324 000	712 000	2 500	LRT 15017060

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

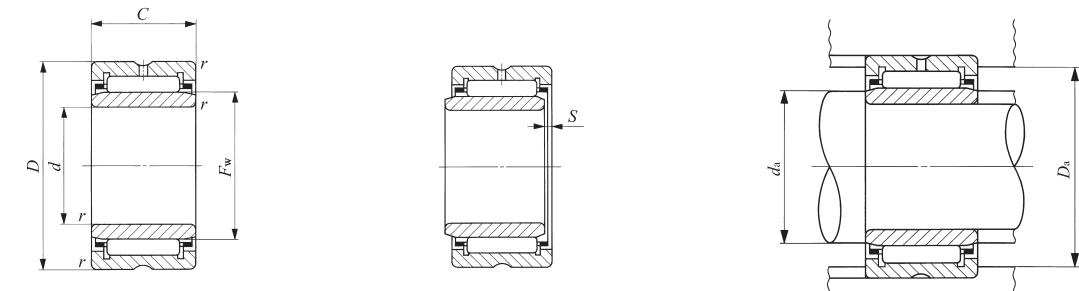

NA49 NA48

Shaft dia. 160 – 340mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
160	—	—	NA 4832	—	—	—	3 050	160
	NA 4932	—	—	—	—	—	6 750	160
170	—	—	NA 4834	—	—	—	4 120	170
	NA 4934	—	—	—	—	—	7 110	170
180	—	—	NA 4836	—	—	—	4 340	180
	NA 4936	—	—	—	—	—	10 200	180
190	—	—	NA 4838	—	—	—	5 760	190
	NA 4938	—	—	—	—	—	10 700	190
200	—	—	NA 4840	—	—	—	6 040	200
	NA 4940	—	—	—	—	—	15 400	200
220	—	—	NA 4844	—	—	—	6 570	220
	NA 4944	—	—	—	—	—	16 700	220
240	—	—	NA 4848	—	—	—	10 200	240
	NA 4948	—	—	—	—	—	18 000	240
260	—	—	NA 4852	—	—	—	11 000	260
	NA 4952	—	—	—	—	—	31 100	260
280	—	—	NA 4856	—	—	—	15 800	280
	NA 4956	—	—	—	—	—	33 100	280
300	—	—	NA 4860	—	—	—	22 300	300
	NA 4960	—	—	—	—	—	51 400	300
320	—	—	NA 4864	—	—	—	23 700	320
	NA 4964	—	—	—	—	—	54 400	320
340	—	—	NA 4868	—	—	—	25 000	340
	NA 4968	—	—	—	—	—	57 300	340

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*

<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.




Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D	C	B	$r_s$ min <sup>(1)</sup>	Boundary dimensions mm		Standard mounting dimensions mm		Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring	
				$F_w$ <sup>(2)</sup>	<i>S</i> <sup>(2)</sup>	Min.	<i>d</i> <sub>a</sub> Max.	<i>D</i> <sub>a</sub> Max.				
200	40	—	1.1	175	1.5	166.5	173	193.5	173 000	474 000	2 500	LRT 16017540
220	60	—	2	180	3	169	178	211	337 000	761 000	1 900	LRT 16018060
215	45	—	1.1	185	1.5	176.5	183	208.5	211 000	567 000	1 900	LRT 17018545
230	60	—	2	190	3	179	188	221	347 000	810 000	1 900	LRT 17019060
225	45	—	1.1	195	1.5	186.5	193	218.5	218 000	602 000	1 900	LRT 18019545
250	69	—	2	205	3	189	203	241	434 000	989 000	1 900	LRT 18020569
240	50	—	1.5	210	1.5	198	208	232	249 000	726 000	1 800	LRT 19021050
260	69	—	2	215	3	199	213	251	440 000	1 020 000	1 700	LRT 19021569
250	50	—	1.5	220	1.5	208	218	242	255 000	766 000	1 600	LRT 20022050
280	80	—	2.1	225	4	211	223	269	518 000	1 120 000	1 600	LRT 20022580
270	50	—	1.5	240	1.5	228	238	262	266 000	833 000	1 500	LRT 22024050
300	80	—	2.1	245	4	231	243	289	536 000	1 200 000	1 400	LRT 22024580
300	60	—	2	265	2	249	262	291	345 000	1 150 000	1 300	LRT 24026560
320	80	—	2.1	265	4	251	262	309	565 000	1 320 000	1 300	LRT 24026580
320	60	—	2	285	2	269	282	311	354 000	1 220 000	1 100	LRT 26028560
360	100	—	2.1	290	4	271	287	349	847 000	1 900 000	1 100	LRT 260290100
350	69	—	2	305	2.5	289	302	341	486 000	1 550 000	950	LRT 28030569
380	100	—	2.1	310	4	291	307	369	877 000	2 040 000	950	LRT 280310100
380	80	—	2.1	330	2.5	311	327	369	610 000	1 900 000	900	LRT 30033080
420	118	—	3	340	4	313	337	407	1 130 000	2 650 000	850	LRT 300340118
400	80	—	2.1	350	2.5	331	347	389	635 000	2 040 000	750	LRT 32035080
440	118	—	3	360	4	333	357	427	1 170 000	2 830 000	750	LRT 320360118
420	80	—	2.1	370	2.5	351	367	409	651 000	2 140 000	700	LRT 34037080
460	118	—	3	380	4	353	377	447	1 220 000	3 020 000	700	LRT 340380118

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring

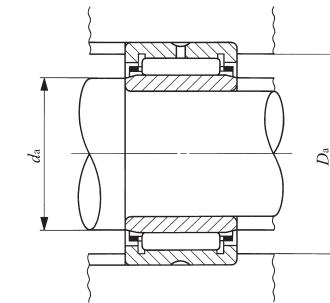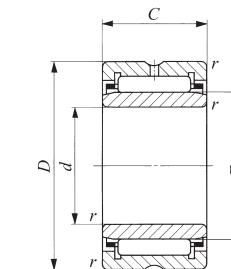

NA49 NA48

Shaft dia. 360 – 440mm

Shaft dia. mm	Identification number						Mass (Ref.) g	d
	NA 49	NA 69	NA 48	TAFI	TRI	GTRI		
360	— <b>NA 4972</b>	—	<b>NA 4872</b>	—	—	—	26 400	360
		—	—	—	—	—	60 200	360
380	— <b>NA 4976</b>	—	<b>NA 4876</b>	—	—	—	44 600	380
		—	—	—	—	—	90 300	380
400	<b>NA 4980</b>	—	—	—	—	—	94 400	400
420	<b>NA 4984</b>	—	—	—	—	—	98 500	420
440	<b>NA 4988</b>	—	—	—	—	—	131 000	440

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*<sup>(2)</sup> Allowable axial shift amount of inner ring to outer ring<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

D	C	B	<i>r</i> <sub>s min</sub> <sup>(1)</sup>	Boundary dimensions mm		Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring
				<i>F</i> <sub>w</sub> <sup>(2)</sup>	<i>S</i>	Min.	<i>d</i> <sub>a</sub> Max.	<i>D</i> <sub>a</sub> Max.				
440	80	—	2.1	390	2.5	371	387	429	680 000	2 320 000	650	LRT 36039080
480	118	—	3	400	4	373	397	467	1 260 000	3 200 000	600	LRT 360400118
480	100	—	2.1	415	3	391	412	469	951 000	2 860 000	600	LRT 380415100
	520	140	—	4	430	5	396	427	504	1 540 000	4 030 000	500
540	140	—	4	450	5	416	447	524	1 590 000	4 270 000	500	LRT 400450140
560	140	—	4	470	5	436	467	544	1 640 000	4 510 000	500	LRT 420470140
600	160	—	4	490	5	456	487	584	1 910 000	5 140 000	400	LRT 440490160

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring, Inch Series

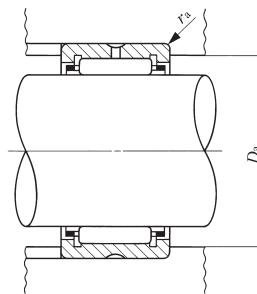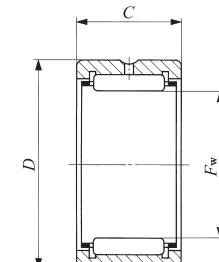

BR

Shaft dia. 15.875 – 47.625mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)  <i>F<sub>w</sub></i>	<i>D</i>	<i>C</i>	Standard mounting dimensions mm  <i>D<sub>a</sub></i> Max.	<sup>(1)</sup> <i>r<sub>as max</sub></i>
<b>15.875</b> ( $\frac{5}{8}$ )	<b>BR 101812</b>	49	15.875( $\frac{5}{8}$ )	28.575(1 $\frac{1}{8}$ )	19.050( $\frac{3}{4}$ )	24.5	0.6
<b>19.050</b> ( $\frac{3}{4}$ )	<b>BR 122012</b> <b>BR 122016</b>	56 75	19.050( $\frac{3}{4}$ ) 19.050( $\frac{3}{4}$ )	31.750(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	19.050( $\frac{3}{4}$ ) 25.400(1 $\frac{1}{4}$ )	26.5 26.5	1 1
<b>22.225</b> ( $\frac{7}{8}$ )	<b>BR 142212</b> <b>BR 142216</b>	63 84.5	22.225( $\frac{7}{8}$ ) 22.225( $\frac{7}{8}$ )	34.925(1 $\frac{3}{8}$ ) 34.925(1 $\frac{3}{8}$ )	19.050( $\frac{3}{4}$ ) 25.400(1 $\frac{1}{4}$ )	29.7 29.7	1 1
<b>25.400</b> (1)	<b>BR 162412</b> <b>BR 162416</b>	69 92.5	25.400(1 $\frac{1}{4}$ ) 25.400(1 $\frac{1}{4}$ )	38.100(1 $\frac{1}{2}$ ) 38.100(1 $\frac{1}{2}$ )	19.050( $\frac{3}{4}$ ) 25.400(1 $\frac{1}{4}$ )	32.9 32.9	1 1
<b>28.575</b> ( $1\frac{1}{8}$ )	<b>BR 182616</b> <b>BR 182620</b>	102 128	28.575(1 $\frac{1}{8}$ ) 28.575(1 $\frac{1}{8}$ )	41.275(1 $\frac{5}{8}$ ) 41.275(1 $\frac{5}{8}$ )	25.400(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	36 36	1 1
<b>31.750</b> ( $1\frac{1}{4}$ )	<b>BR 202816</b> <b>BR 202820</b>	110 138	31.750(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	44.450(1 $\frac{3}{4}$ ) 44.450(1 $\frac{3}{4}$ )	25.400(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	39.2 39.2	1 1
<b>34.925</b> ( $1\frac{3}{8}$ )	<b>BR 223016</b> <b>BR 223020</b>	119 149	34.925(1 $\frac{3}{8}$ ) 34.925(1 $\frac{3}{8}$ )	47.625(1 $\frac{1}{8}$ ) 47.625(1 $\frac{1}{8}$ )	25.400(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	42.4 42.4	1 1
<b>38.100</b> ( $1\frac{1}{2}$ )	<b>BR 243316</b> <b>BR 243320</b>	149 187	38.100(1 $\frac{1}{2}$ ) 38.100(1 $\frac{1}{2}$ )	52.388(2 $\frac{1}{16}$ ) 52.388(2 $\frac{1}{16}$ )	25.400(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	45.1 45.1	1.5 1.5
<b>41.275</b> ( $1\frac{5}{8}$ )	<b>BR 263516</b> <b>BR 263520</b>	158 199	41.275(1 $\frac{5}{8}$ ) 41.275(1 $\frac{5}{8}$ )	55.562(2 $\frac{3}{16}$ ) 55.562(2 $\frac{3}{16}$ )	25.400(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	48.3 48.3	1.5 1.5
<b>44.450</b> ( $1\frac{3}{4}$ )	<b>BR 283716</b> <b>BR 283720</b> <b>BR 283820</b>	170 215 250	44.450(1 $\frac{3}{4}$ ) 44.450(1 $\frac{3}{4}$ ) 44.450(1 $\frac{3}{4}$ )	58.738(2 $\frac{5}{16}$ ) 58.738(2 $\frac{5}{16}$ ) 60.325(2 $\frac{5}{8}$ )	25.400(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ ) 31.750(1 $\frac{1}{4}$ )	51.5 51.5 53.1	1.5 1.5 1.5
<b>47.625</b> ( $1\frac{7}{8}$ )	<b>BR 303920</b>	225	47.625(1 $\frac{7}{8}$ )	61.912 (2 $\frac{7}{16}$ )	31.750(1 $\frac{1}{4}$ )	54.7	1.5

Notes<sup>(1)</sup> Maximum permissible corner radius of the housing

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C<sub>0</sub></i> N	Allowable rotational speed <sup>(2)</sup> rpm
18 900	19 700	25 000
21 700 27 600	24 400 33 100	20 000 20 000
23 000 29 100	27 100 36 800	18 000 18 000
25 300 32 100	31 900 43 300	16 000 16 000
34 900 43 200	49 900 65 600	14 000 14 000
36 000 44 600	53 500 70 300	13 000 13 000
38 500 47 700	60 000 78 900	11 000 11 000
43 700 54 200	66 900 88 200	11 000 11 000
44 800 55 600	70 900 93 400	9 500 9 500
47 500 58 900	78 200 103 000	9 000 9 000
60 100	108 000	8 500

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring, Inch Series

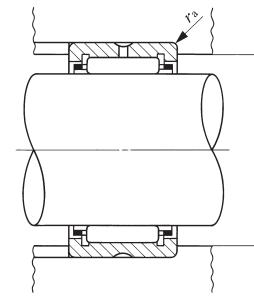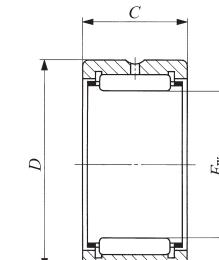

BR

Shaft dia. 50.800 – 101.600mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			$F_w$	D	C	$D_a$ Max.	$r_{as\ max}^{(1)}$
<b>50.800</b> (2)	<b>BR 324116</b>	190	50.800(2 )	65.088(2 1/16)	25.400(1 )	57.8	1.5
	<b>BR 324120</b>	240	50.800(2 )	65.088(2 1/16)	31.750(1 1/4)	57.8	1.5
<b>57.150</b> (2 1/4)	<b>BR 364824</b>	435	57.150(2 1/4)	76.200(3 )	38.100(1 1/2)	69	1.5
	<b>BR 364828</b>	510	57.150(2 1/4)	76.200(3 )	44.450(1 3/4)	69	1.5
<b>63.500</b> (2 1/2)	<b>BR 405224</b>	475	63.500(2 1/2)	82.550(3 1/4)	38.100(1 1/2)	74.3	2
	<b>BR 405228</b>	555	63.500(2 1/2)	82.550(3 1/4)	44.450(1 3/4)	74.3	2
<b>69.850</b> (2 3/4)	<b>BR 445624</b>	510	69.850(2 3/4)	88.900(3 1/2)	38.100(1 1/2)	80.7	2
	<b>BR 445628</b>	600	69.850(2 3/4)	88.900(3 1/2)	44.450(1 3/4)	80.7	2
<b>76.200</b> (3)	<b>BR 486024</b>	555	76.200(3 )	95.250(3 3/4)	38.100(1 1/2)	87	2
	<b>BR 486028</b>	650	76.200(3 )	95.250(3 3/4)	44.450(1 3/4)	87	2
<b>82.550</b> (3 1/4)	<b>BR 526828</b>	990	82.550(3 1/4)	107.950(4 1/4)	44.450(1 3/4)	99.7	2
	<b>BR 526832</b>	1 140	82.550(3 1/4)	107.950(4 1/4)	50.800(2 )	99.7	2
<b>88.900</b> (3 1/2)	<b>BR 567232</b>	1 220	88.900(3 1/2)	114.300(4 1/2)	50.800(2 )	106.1	2
<b>95.250</b> (3 3/4)	<b>BR 607632</b>	1 290	95.250(3 3/4)	120.650(4 3/4)	50.800(2 )	111.4	2.5
<b>101.600</b> (4)	<b>BR 648032</b>	1 370	101.600(4 )	127.000(5 )	50.800(2 )	117.8	2.5

Notes<sup>(1)</sup> Maximum permissible corner radius of the housing

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. In bearings with a roller set bore diameter  $F_w$  of 69.850 mm or less, the outer ring has an oil groove and an oil hole. In others, the outer ring has an oil groove and two oil holes.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C<sub>0</sub></i> N	Allowable rotational speed <sup>(2)</sup> rpm
51 000	89 400	8 000
	63 200	8 000
90 300	158 000	7 000
	105 000	7 000
94 600	174 000	6 500
	110 000	6 500
98 700	189 000	5 500
	114 000	5 500
105 000	211 000	5 500
	122 000	5 500
141 000	259 000	5 000
	154 000	5 000
162 000	316 000	4 500
169 000	342 000	4 000
176 000	368 000	4 000

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring, Inch Series

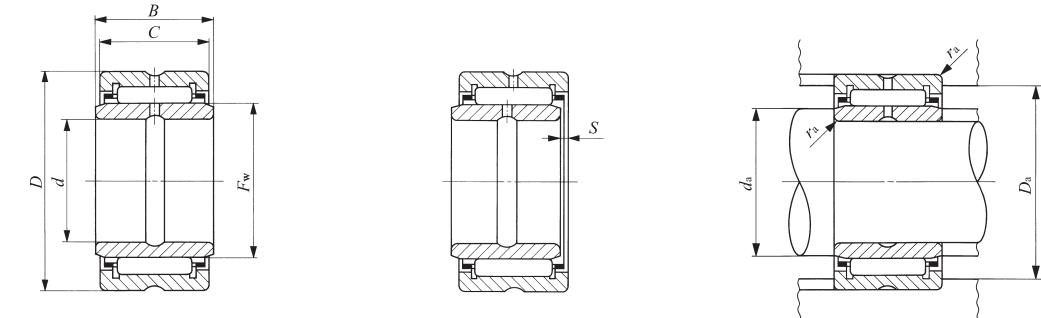

BRI

Shaft dia. 9.525 – 41.275mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)						
			d	D	C	B	$F_w$	<sup>(1)</sup> S	
9.525 ( $\frac{3}{8}$ )	BRI 61812	67.5	9.525( $\frac{3}{8}$ )	28.575( $1\frac{1}{8}$ )	19.050( $\frac{3}{4}$ )	19.300	15.875( $\frac{5}{8}$ )	0.3	
12.700 ( $\frac{1}{2}$ )	BRI 82012	79.5	12.700( $\frac{1}{2}$ )	31.750( $1\frac{1}{4}$ )	19.050( $\frac{3}{4}$ )	19.300	19.050( $\frac{3}{4}$ )	0.3	
	BRI 82016	106	12.700( $\frac{1}{2}$ )	31.750( $1\frac{1}{4}$ )	25.400(1 )	25.650	19.050( $\frac{3}{4}$ )	0.5	
15.875 ( $\frac{5}{8}$ )	BRI 102212	91	15.875( $\frac{5}{8}$ )	34.925( $1\frac{3}{8}$ )	19.050( $\frac{3}{4}$ )	19.300	22.225( $\frac{7}{8}$ )	0.3	
	BRI 102216	122	15.875( $\frac{5}{8}$ )	34.925( $1\frac{3}{8}$ )	25.400(1 )	25.650	22.225( $\frac{7}{8}$ )	0.5	
19.050 ( $\frac{3}{4}$ )	BRI 122412	102	19.050( $\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ )	19.050( $\frac{3}{4}$ )	19.300	25.400(1 )	0.3	
	BRI 122416	136	19.050( $\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ )	25.400(1 )	25.650	25.400(1 )	0.5	
22.225 ( $\frac{7}{8}$ )	BRI 142616	152	22.225( $\frac{7}{8}$ )	41.275( $1\frac{5}{8}$ )	25.400(1 )	25.650	28.575( $1\frac{1}{8}$ )	0.5	
	BRI 142620	190	22.225( $\frac{7}{8}$ )	41.275( $1\frac{5}{8}$ )	31.750( $1\frac{1}{4}$ )	32.000	28.575( $1\frac{1}{8}$ )	0.5	
25.400 (1 )	BRI 162816	166	25.400(1 )	44.450( $1\frac{3}{4}$ )	25.400(1 )	25.650	31.750( $1\frac{1}{4}$ )	0.5	
	BRI 162820	210	25.400(1 )	44.450( $1\frac{3}{4}$ )	31.750( $1\frac{1}{4}$ )	32.000	31.750( $1\frac{1}{4}$ )	0.5	
28.575 ( $1\frac{1}{8}$ )	BRI 183016	182	28.575( $1\frac{1}{8}$ )	47.625( $1\frac{7}{8}$ )	25.400(1 )	25.650	34.925( $1\frac{3}{8}$ )	0.5	
	BRI 183020	225	28.575( $1\frac{1}{8}$ )	47.625( $1\frac{7}{8}$ )	31.750( $1\frac{1}{4}$ )	32.000	34.925( $1\frac{3}{8}$ )	0.5	
31.750 ( $1\frac{1}{4}$ )	BRI 203316	220	31.750( $1\frac{1}{4}$ )	52.388( $2\frac{1}{16}$ )	25.400(1 )	25.650	38.100( $1\frac{1}{2}$ )	0.5	
	BRI 203320	275	31.750( $1\frac{1}{4}$ )	52.388( $2\frac{1}{16}$ )	31.750( $1\frac{1}{4}$ )	32.000	38.100( $1\frac{1}{2}$ )	0.5	
34.925 ( $1\frac{3}{8}$ )	BRI 223516	235	34.925( $1\frac{3}{8}$ )	55.562( $2\frac{3}{16}$ )	25.400(1 )	25.650	41.275( $1\frac{5}{8}$ )	0.5	
	BRI 223520	295	34.925( $1\frac{3}{8}$ )	55.562( $2\frac{3}{16}$ )	31.750( $1\frac{1}{4}$ )	32.000	41.275( $1\frac{5}{8}$ )	0.5	
38.100 ( $1\frac{1}{2}$ )	BRI 243716	250	38.100( $1\frac{1}{2}$ )	58.738( $2\frac{5}{16}$ )	25.400(1 )	25.650	44.450( $1\frac{3}{4}$ )	0.5	
	BRI 243720	315	38.100( $1\frac{1}{2}$ )	58.738( $2\frac{5}{16}$ )	31.750( $1\frac{1}{4}$ )	32.000	44.450( $1\frac{3}{4}$ )	0.5	
	BRI 243820	350	38.100( $1\frac{1}{2}$ )	60.325( $2\frac{3}{8}$ )	31.750( $1\frac{1}{4}$ )	32.000	44.450( $1\frac{3}{4}$ )	0.5	
	BRI 243920	380	38.100( $1\frac{1}{2}$ )	61.912( $2\frac{7}{16}$ )	31.750( $1\frac{1}{4}$ )	32.000	47.625( $1\frac{7}{8}$ )	0.5	
41.275 ( $1\frac{5}{8}$ )	BRI 264116	325	41.275( $1\frac{5}{8}$ )	65.088( $2\frac{9}{16}$ )	25.400(1 )	25.650	50.800(2 )	0.5	
	BRI 264120	410	41.275( $1\frac{5}{8}$ )	65.088( $2\frac{9}{16}$ )	31.750( $1\frac{1}{4}$ )	32.000	50.800(2 )	0.5	

Notes<sup>(1)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(2)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.


Remarks 1. The inner ring and the outer ring each have an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm			Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring
			<i>d</i> Min.	<i>d</i> Max.	<i>D</i> Max.	<i>D</i> Min.	<i>r</i> <sub>as max</sub> <sup>(2)</sup>					
9.525 ( $\frac{3}{8}$ )	BRI 61812	67.5	9.525( $\frac{3}{8}$ )	28.575( $1\frac{1}{8}$ )	19.050( $\frac{3}{4}$ )	19.300	15.875( $\frac{5}{8}$ )	0.3	18 900	19 700	25 000	LRB 61012
12.700 ( $\frac{1}{2}$ )	BRI 82012	79.5	12.700( $\frac{1}{2}$ )	31.750( $1\frac{1}{4}$ )	19.050( $\frac{3}{4}$ )	19.300	19.050( $\frac{3}{4}$ )	0.3	21 700	24 400	20 000	LRB 81212
	BRI 82016	106	12.700( $\frac{1}{2}$ )	31.750( $1\frac{1}{4}$ )	25.400(1 )	25.650	19.050( $\frac{3}{4}$ )	0.5	27 600	33 100	20 000	LRB 81216
15.875 ( $\frac{5}{8}$ )	BRI 102212	91	15.875( $\frac{5}{8}$ )	34.925( $1\frac{3}{8}$ )	19.050( $\frac{3}{4}$ )	19.300	22.225( $\frac{7}{8}$ )	0.3	23 000	27 100	18 000	LRB 101412
	BRI 102216	122	15.875( $\frac{5}{8}$ )	34.925( $1\frac{3}{8}$ )	25.400(1 )	25.650	22.225( $\frac{7}{8}$ )	0.5	29 100	36 800	18 000	LRB 101416
19.050 ( $\frac{3}{4}$ )	BRI 122412	102	19.050( $\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ )	19.050( $\frac{3}{4}$ )	19.300	25.400(1 )	0.3	25 300	31 900	16 000	LRB 121612
	BRI 122416	136	19.050( $\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ )	25.400(1 )	25.650	25.400(1 )	0.5	32 100	43 300	16 000	LRB 121616
22.225 ( $\frac{7}{8}$ )	BRI 142616	152	22.225( $\frac{7}{8}$ )	41.275( $1\frac{5}{8}$ )	25.400(1 )	25.650	28.575( $1\frac{1}{8}$ )	0.5	34 900	49 900	14 000	LRB 141816
	BRI 142620	190	22.225( $\frac{7}{8}$ )	41.275( $1\frac{5}{8}$ )	31.750( $1\frac{1}{4}$ )	32.000	28.575( $1\frac{1}{8}$ )	0.5	43 200	65 600	14 000	LRB 141820
25.400 (1 )	BRI 162816	166	25.400(1 )	44.450( $1\frac{3}{4}$ )	25.400(1 )	25.650	31.750( $1\frac{1}{4}$ )	0.5	36 000	53 500	13 000	LRB 162016
	BRI 162820	210	25.400(1 )	44.450( $1\frac{3}{4}$ )	31.750( $1\frac{1}{4}$ )	32.000	31.750( $1\frac{1}{4}$ )	0.5	44 600	70 300	13 000	LRB 162020
28.575 ( $1\frac{1}{8}$ )	BRI 183016	182	28.575( $1\frac{1}{8}$ )	47.625( $1\frac{7}{8}$ )	25.400(1 )	25.650	34.925( $1\frac{3}{8}$ )	0.5	38 500	60 000</		

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring, Inch Series

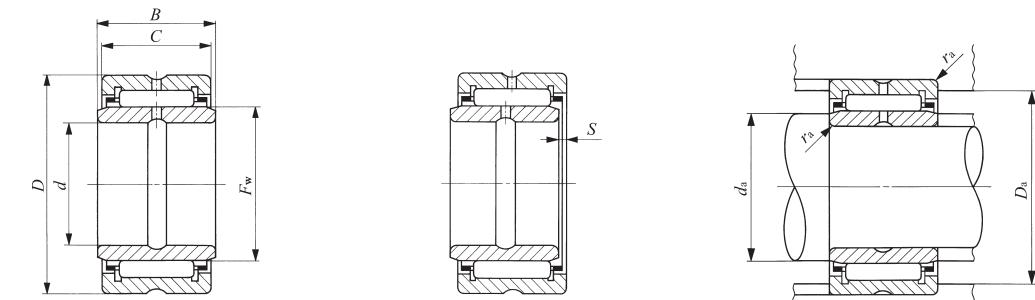

BRI

Shaft dia. 44.450 – 88.900mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)					
			d	D	C	B	F <sub>w</sub>	S <sup>(1)</sup>
44.450 (1 $\frac{3}{4}$ )	BRI 284824	735	44.450(1 $\frac{3}{4}$ )	76.200(3 $\frac{1}{2}$ )	38.100(1 $\frac{1}{2}$ )	38.350	57.150(2 $\frac{1}{4}$ )	1
	BRI 284828	855	44.450(1 $\frac{3}{4}$ )	76.200(3 $\frac{1}{2}$ )	44.450(1 $\frac{3}{4}$ )	44.700	57.150(2 $\frac{1}{4}$ )	1
50.800 (2 $\frac{1}{2}$ )	BRI 325224	810	50.800(2 $\frac{1}{2}$ )	82.550(3 $\frac{1}{4}$ )	38.100(1 $\frac{1}{2}$ )	38.350	63.500(2 $\frac{1}{2}$ )	1
	BRI 325228	945	50.800(2 $\frac{1}{2}$ )	82.550(3 $\frac{1}{4}$ )	44.450(1 $\frac{3}{4}$ )	44.700	63.500(2 $\frac{1}{2}$ )	1
57.150 (2 $\frac{1}{4}$ )	BRI 365624	885	57.150(2 $\frac{1}{4}$ )	88.900(3 $\frac{1}{2}$ )	38.100(1 $\frac{1}{2}$ )	38.350	69.850(2 $\frac{1}{4}$ )	1
	BRI 365628	1 040	57.150(2 $\frac{1}{4}$ )	88.900(3 $\frac{1}{2}$ )	44.450(1 $\frac{3}{4}$ )	44.700	69.850(2 $\frac{1}{4}$ )	1
63.500 (2 $\frac{1}{2}$ )	BRI 406024	965	63.500(2 $\frac{1}{2}$ )	95.250(3 $\frac{3}{4}$ )	38.100(1 $\frac{1}{2}$ )	38.350	76.200(3 $\frac{1}{2}$ )	1
	BRI 406028	1 130	63.500(2 $\frac{1}{2}$ )	95.250(3 $\frac{3}{4}$ )	44.450(1 $\frac{3}{4}$ )	44.700	76.200(3 $\frac{1}{2}$ )	1
69.850 (2 $\frac{3}{4}$ )	BRI 446828	1 520	69.850(2 $\frac{3}{4}$ )	107.950(4 $\frac{1}{4}$ )	44.450(1 $\frac{3}{4}$ )	44.700	82.550(3 $\frac{1}{4}$ )	1.5
	BRI 446832	1 740	69.850(2 $\frac{3}{4}$ )	107.950(4 $\frac{1}{4}$ )	50.800(2 $\frac{1}{2}$ )	51.050	82.550(3 $\frac{1}{4}$ )	3
76.200 (3 $\frac{1}{2}$ )	BRI 487232	1 860	76.200(3 $\frac{1}{2}$ )	114.300(4 $\frac{1}{2}$ )	50.800(2 $\frac{1}{2}$ )	51.050	88.900(3 $\frac{1}{2}$ )	3
82.550 (3 $\frac{1}{4}$ )	BRI 527632	1 980	82.550(3 $\frac{1}{4}$ )	120.650(4 $\frac{3}{4}$ )	50.800(2 $\frac{1}{2}$ )	51.050	95.250(3 $\frac{3}{4}$ )	3
88.900 (3 $\frac{1}{2}$ )	BRI 568032	2 120	88.900(3 $\frac{1}{2}$ )	127.000(5 $\frac{1}{2}$ )	50.800(2 $\frac{1}{2}$ )	51.050	101.600(4 $\frac{1}{2}$ )	3

Notes<sup>(1)</sup> Allowable axial shift amount of inner ring to outer ring

<sup>(2)</sup> Maximum permissible corner radius of the shaft or housing



<sup>(3)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.

Remarks 1. In bearings with a bearing bore diameter,  $d$ , of 57.150 mm or less, the outer ring has an oil groove and an oil hole. In bearings with a bearing bore diameter,  $d$ , of 76.200 mm or less, the inner ring has an oil groove and an oil hole. In others, the inner ring and the outer ring each have an oil groove and two oil holes.  
2. No grease is prepacked. Perform proper lubrication.

Standard mounting dimensions mm			$d_a$ Min.	$D_a$ Max.	$r_{as\ max}^{(2)}$	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(3)</sup> rpm	Assembled inner ring
$d_a$ Max.	$D_a$ Min.	$r_{as\ max}^{(2)}$							
52.5	55	69	1.5	90 300	158 000	7 000	LRB 283624		
52.5	55	69	1.5	105 000	191 000	7 000	LRB 283628		
58	61	74.3	2	94 600	174 000	6 500	LRB 324024		
58	61	74.3	2	110 000	210 000	6 500	LRB 324028		
65	67	80.7	2	98 700	189 000	5 500	LRB 364424		
65	67	80.7	2	114 000	228 000	5 500	LRB 364428		
71	73	87	2	105 000	211 000	5 500	LRB 404824		
71	73	87	2	122 000	255 000	5 500	LRB 404828		
77	79	99.7	2	141 000	259 000	5 000	LRB 445228		
77	79	99.7	2	154 000	290 000	5 000	LRB 445232		
83.5	86	106.1	2	162 000	316 000	4 500	LRB 485632		
91	93	111.4	2.5	169 000	342 000	4 000	LRB 526032		
97	99	117.8	2.5	176 000	368 000	4 000	LRB 566432		

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring, Inch Series

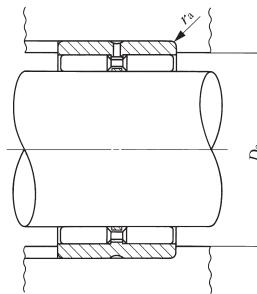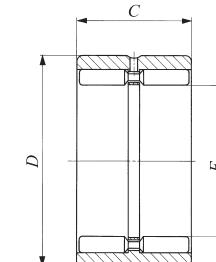

GBR

Shaft dia. 15.875 – 50.800mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			$F_w$	$D$	$C$	$D_a$ Max.	$r_{as\ max}^{(1)}$
15.875 ( $\frac{5}{8}$ )	GBR 101812	55.5	15.875( $\frac{5}{8}$ )	28.575( $1\frac{1}{8}$ )	19.050( $\frac{3}{4}$ )	24.5	0.6
19.050 ( $\frac{3}{4}$ )	GBR 122012	63	19.050( $\frac{3}{4}$ )	31.750( $1\frac{1}{4}$ )	19.050( $\frac{3}{4}$ )	27	0.6
22.225 ( $\frac{7}{8}$ )	GBR 142212 GBR 142216	71 95.5	22.225( $\frac{7}{8}$ ) 22.225( $\frac{7}{8}$ )	34.925( $1\frac{3}{8}$ ) 34.925( $1\frac{3}{8}$ )	19.050( $\frac{3}{4}$ ) 25.400( $1\frac{1}{8}$ )	30 30	0.6 0.6
25.400 (1)	GBR 162412 GBR 162416	79 106	25.400(1) 25.400(1)	38.100( $1\frac{1}{2}$ ) 38.100( $1\frac{1}{2}$ )	19.050( $\frac{3}{4}$ ) 25.400( $1\frac{1}{8}$ )	33.3 33.3	0.6 0.6
28.575 ( $1\frac{1}{8}$ )	GBR 182616	117	28.575( $1\frac{1}{8}$ )	41.275( $1\frac{5}{8}$ )	25.400(1)	36.3	0.6
31.750 ( $1\frac{1}{4}$ )	GBR 202816	128	31.750( $1\frac{1}{4}$ )	44.450( $1\frac{3}{4}$ )	25.400(1)	39.6	0.6
34.925 ( $1\frac{3}{8}$ )	GBR 223016	137	34.925( $1\frac{3}{8}$ )	47.625( $1\frac{1}{8}$ )	25.400(1)	42.8	0.6
38.100 ( $1\frac{1}{2}$ )	GBR 243316 GBR 243320	168 205	38.100( $1\frac{1}{2}$ ) 38.100( $1\frac{1}{2}$ )	52.388( $2\frac{1}{16}$ ) 52.388( $2\frac{1}{16}$ )	25.400(1) 31.750( $1\frac{1}{4}$ )	47.3 47.3	0.6 0.6
41.275 ( $1\frac{5}{8}$ )	GBR 263516 GBR 263520	180 220	41.275( $1\frac{5}{8}$ ) 41.275( $1\frac{5}{8}$ )	55.562( $2\frac{3}{16}$ ) 55.562( $2\frac{3}{16}$ )	25.400(1) 31.750( $1\frac{1}{4}$ )	50.5 50.5	0.6 0.6
44.450 ( $1\frac{3}{4}$ )	GBR 283720 GBR 283820	235 275	44.450( $1\frac{3}{4}$ ) 44.450( $1\frac{3}{4}$ )	58.738( $2\frac{5}{16}$ ) 60.325( $2\frac{3}{8}$ )	31.750( $1\frac{1}{4}$ ) 31.750( $1\frac{1}{4}$ )	53.7 55.3	0.6 0.6
47.625 ( $1\frac{7}{8}$ )	GBR 303920	250	47.625( $1\frac{1}{8}$ )	61.912( $2\frac{1}{16}$ )	31.750( $1\frac{1}{4}$ )	56.2	1
50.800 (2)	GBR 324116 GBR 324120	215 265	50.800(2) 50.800(2)	65.088( $2\frac{9}{16}$ ) 65.088( $2\frac{9}{16}$ )	25.400(1) 31.750( $1\frac{1}{4}$ )	59.2 59.2	1 1

Notes<sup>(1)</sup> Maximum permissible corner radius of the housing

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
23 500	28 500	9 500
26 400	34 500	8 000
28 600	40 100	7 000
38 300	58 300	7 000
31 000	46 100	6 000
41 400	67 100	6 000
43 900	75 300	5 500
46 600	83 900	4 500
49 500	91 800	4 500
54 200	97 700	4 000
64 100	121 000	4 000
56 600	105 000	3 500
67 000	130 000	3 500
69 700	141 000	3 500
69 700	141 000	3 500
72 400	150 000	3 000
63 100	130 000	3 000
74 600	162 000	3 000

## MACHINED TYPE NEEDLE ROLLER BEARINGS

Without Inner Ring, Inch Series

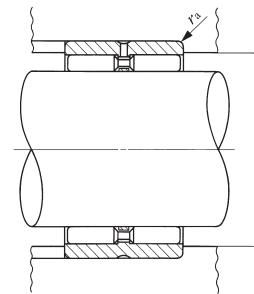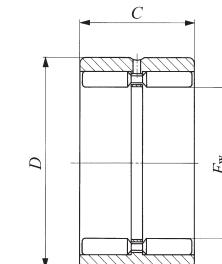

GBR

Shaft dia. 57.150 – 107.950mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)			Standard mounting dimensions mm	
			$F_w$	D	C	$D_a$ Max.	$r_{as\ max}^{(1)}$
57.150 ( $2\frac{1}{4}$ )	GBR 364824 GBR 364828	490 580	57.150( $2\frac{1}{4}$ ) 57.150( $2\frac{1}{4}$ )	76.200(3) 76.200(3)	38.100( $1\frac{1}{2}$ ) 44.450( $1\frac{3}{4}$ )	69.2 69.2	1.5 1.5
63.500 ( $2\frac{1}{2}$ )	GBR 405224 GBR 405228	535 635	63.500( $2\frac{1}{2}$ ) 63.500( $2\frac{1}{2}$ )	82.550( $3\frac{1}{4}$ ) 82.550( $3\frac{1}{4}$ )	38.100( $1\frac{1}{2}$ ) 44.450( $1\frac{3}{4}$ )	75.7 75.7	1.5 1.5
69.850 ( $2\frac{3}{4}$ )	GBR 445624 GBR 445628	585 690	69.850( $2\frac{3}{4}$ ) 69.850( $2\frac{3}{4}$ )	88.900( $3\frac{1}{2}$ ) 88.900( $3\frac{1}{2}$ )	38.100( $1\frac{1}{2}$ ) 44.450( $1\frac{3}{4}$ )	82 82	1.5 1.5
76.200 (3)	GBR 486024 GBR 486028	630 745	76.200(3) 76.200(3)	95.250( $3\frac{3}{4}$ ) 95.250( $3\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ ) 44.450( $1\frac{3}{4}$ )	88 88	1.5 1.5
82.550 ( $3\frac{1}{4}$ )	GBR 526828 GBR 526832	1 100 1 240	82.550( $3\frac{1}{4}$ ) 82.550( $3\frac{1}{4}$ )	107.950( $4\frac{1}{4}$ ) 107.950( $4\frac{1}{4}$ )	44.450( $1\frac{3}{4}$ ) 50.800(2)	99.9 99.9	1.5 1.5
88.900 ( $3\frac{1}{2}$ )	GBR 567232	1 330	88.900( $3\frac{1}{2}$ )	114.300( $4\frac{1}{2}$ )	50.800(2)	106.3	1.5
95.250 ( $3\frac{3}{4}$ )	GBR 607632	1 420	95.250( $3\frac{3}{4}$ )	120.650( $4\frac{3}{4}$ )	50.800(2)	112.6	1.5
101.600 (4)	GBR 648032	1 500	101.600(4)	127.000(5)	50.800(2)	119	1.5
107.950 ( $4\frac{1}{4}$ )	GBR 688432	1 580	107.950( $4\frac{1}{4}$ )	133.350( $5\frac{1}{4}$ )	50.800(2)	125.3	1.5

Notes<sup>(1)</sup> Maximum permissible corner radius of the housing

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
113 000	224 000	2 500
133 000	276 000	2 500
120 000	248 000	2 500
141 000	306 000	2 500
125 000	273 000	2 000
147 000	336 000	2 000
131 000	298 000	2 000
154 000	368 000	2 000
193 000	396 000	1 800
214 000	452 000	1 800
221 000	488 000	1 700
228 000	522 000	1 600
237 000	556 000	1 500
242 000	590 000	1 400

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring, Inch Series

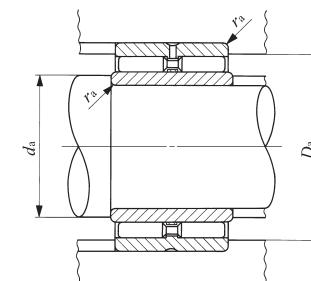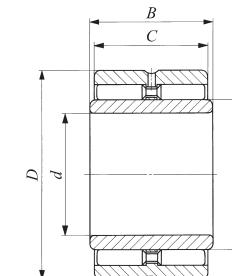

GBRI

Shaft dia. 9.525 – 41.275mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)				
			d	D	C	B	F <sub>w</sub>
9.525 ( $\frac{3}{8}$ )	GBRI 61812	74	9.525( $\frac{3}{8}$ )	28.575( $1\frac{1}{8}$ )	19.050( $\frac{3}{4}$ )	19.300	15.875( $\frac{5}{8}$ )
12.700 ( $\frac{1}{2}$ )	GBRI 82012	86.5	12.700( $\frac{1}{2}$ )	31.750( $1\frac{1}{4}$ )	19.050( $\frac{3}{4}$ )	19.300	19.050( $\frac{3}{4}$ )
15.875 ( $\frac{5}{8}$ )	GBRI 102212 GBRI 102216	99 133	15.875( $\frac{5}{8}$ ) 15.875( $\frac{5}{8}$ )	34.925( $1\frac{1}{8}$ ) 34.925( $1\frac{1}{8}$ )	19.050( $\frac{3}{4}$ ) 25.400( $1\frac{1}{2}$ )	19.300 25.650	22.225( $\frac{5}{8}$ ) 22.225( $\frac{5}{8}$ )
19.050 ( $\frac{3}{4}$ )	GBRI 122412 GBRI 122416	112 150	19.050( $\frac{3}{4}$ ) 19.050( $\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ ) 38.100( $1\frac{1}{2}$ )	19.050( $\frac{3}{4}$ ) 25.400( $1\frac{1}{2}$ )	19.300 25.650	25.400( $1\frac{1}{2}$ ) 25.400( $1\frac{1}{2}$ )
22.225 ( $\frac{7}{8}$ )	GBRI 142616	167	22.225( $\frac{7}{8}$ )	41.275( $1\frac{1}{8}$ )	25.400( $1\frac{1}{2}$ )	25.650	28.575( $1\frac{1}{8}$ )
25.400 (1)	GBRI 162816	184	25.400( $1\frac{1}{2}$ )	44.450( $1\frac{3}{4}$ )	25.400( $1\frac{1}{2}$ )	25.650	31.750( $1\frac{1}{4}$ )
28.575 ( $1\frac{1}{8}$ )	GBRI 183016	200	28.575( $1\frac{1}{8}$ )	47.625( $1\frac{1}{8}$ )	25.400( $1\frac{1}{2}$ )	25.650	34.925( $1\frac{1}{8}$ )
31.750 ( $1\frac{1}{4}$ )	GBRI 203316 GBRI 203320	235 291	31.750( $1\frac{1}{4}$ ) 31.750( $1\frac{1}{4}$ )	52.388( $2\frac{1}{16}$ ) 52.388( $2\frac{1}{16}$ )	25.400( $1\frac{1}{2}$ ) 31.750( $1\frac{1}{4}$ )	25.650 32.000	38.100( $1\frac{1}{2}$ ) 38.100( $1\frac{1}{2}$ )
34.925 ( $1\frac{3}{8}$ )	GBRI 223516 GBRI 223520	255 316	34.925( $1\frac{3}{8}$ ) 34.925( $1\frac{3}{8}$ )	55.562( $2\frac{1}{16}$ ) 55.562( $2\frac{1}{16}$ )	25.400( $1\frac{1}{2}$ ) 31.750( $1\frac{1}{4}$ )	25.650 32.000	41.275( $1\frac{1}{8}$ ) 41.275( $1\frac{1}{8}$ )
38.100 ( $1\frac{1}{2}$ )	GBRI 243720 GBRI 243820 GBRI 243920	335 375 410	38.100( $1\frac{1}{2}$ ) 38.100( $1\frac{1}{2}$ ) 38.100( $1\frac{1}{2}$ )	58.738( $2\frac{1}{16}$ ) 60.325( $2\frac{1}{8}$ ) 61.912( $2\frac{1}{16}$ )	31.750( $1\frac{1}{4}$ ) 31.750( $1\frac{1}{4}$ ) 31.750( $1\frac{1}{4}$ )	32.000 32.000 32.000	44.450( $1\frac{3}{4}$ ) 44.450( $1\frac{3}{4}$ ) 47.625( $1\frac{1}{8}$ )
41.275 ( $1\frac{5}{8}$ )	GBRI 264116 GBRI 264120	350 435	41.275( $1\frac{5}{8}$ ) 41.275( $1\frac{5}{8}$ )	65.088( $2\frac{1}{16}$ ) 65.088( $2\frac{1}{16}$ )	25.400( $1\frac{1}{2}$ ) 31.750( $1\frac{1}{4}$ )	25.650 32.000	50.800( $2\frac{1}{2}$ ) 50.800( $2\frac{1}{2}$ )

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.

d <sub>a</sub> Min.	d <sub>a</sub> Max.	Standard mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed ( <sup>(2)</sup> ) rpm	Assembled inner ring
		D <sub>a</sub> Max.	r <sub>as max</sub> <sup>(1)</sup>				
14	14.5	24.5	0.6	23 500	28 500	9 500	LRBZ 61012
17.5	18	27	0.6	26 400	34 500	8 000	LRBZ 81212
21	21.2	30	0.6	28 600	40 100	7 000	LRBZ 101412
21	21.2	30	0.6	38 300	58 300	7 000	LRBZ 101416
24	24.4	33.3	0.6	31 000	46 100	6 000	LRBZ 121612
24	24.4	33.3	0.6	41 400	67 100	6 000	LRBZ 121616
27	27.5	36.3	0.6	43 900	75 300	5 500	LRBZ 141816
30.5	30.7	39.6	0.6	46 600	83 900	4 500	LRBZ 162016
33.5	33.9	42.8	0.6	49 500	91 800	4 500	LRBZ 182216
37	37.1	47.3	0.6	54 200	97 700	4 000	LRBZ 202416
37	37.1	47.3	0.6	64 100	121 000	4 000	LRBZ 202420
40.2	40.2	50.5	0.6	56 600	105 000	3 500	LRBZ 222616
40.2	40.2	50.5	0.6	67 000	130 000	3 500	LRBZ 222620
43.3	43.4	53.7	0.6	69 700	141 000	3 500	LRBZ 242820
43.3	43.4	55.3	0.6	69 700	141 000	3 500	LRBZ 242820
43.3	45	56.2	1	72 400	150 000	3 000	LRBZ 243020
48	49	59.2	1	63 100	130 000	3 000	LRBZ 263216
48	49	59.2	1	74 600	162 000	3 000	LRBZ 263220

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Inner Ring, Inch Series

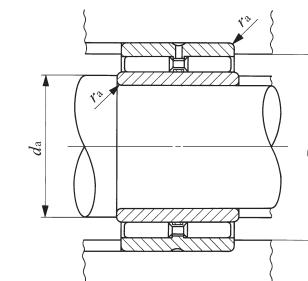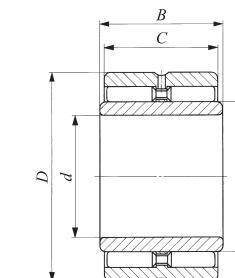

GBRI

Shaft dia. 44.450 – 95.250mm

Shaft dia. mm (inch)	Identification number	Mass (Ref.) g	Boundary dimensions mm(inch)					
			d	D	C	B	F <sub>w</sub>	
<b>44.450</b> <b>(1 3/4)</b>	<b>GBRI 284824</b>	790	44.450(1 3/4)	76.200(3 )	38.100(1 1/2)	38.350	57.150(2 1/4)	
	<b>GBRI 284828</b>	925	44.450(1 3/4)	76.200(3 )	44.450(1 3/4)	44.700	57.150(2 1/4)	
<b>50.800</b> <b>(2)</b>	<b>GBRI 325224</b>	870	50.800(2 )	82.550(3 1/4)	38.100(1 1/2)	38.350	63.500(2 1/2)	
	<b>GBRI 325228</b>	1 030	50.800(2 )	82.550(3 1/4)	44.450(1 3/4)	44.700	63.500(2 1/2)	
<b>57.150</b> <b>(2 1/4)</b>	<b>GBRI 365624</b>	955	57.150(2 1/4)	88.900(3 1/2)	38.100(1 1/2)	38.350	69.850(2 3/4)	
	<b>GBRI 365628</b>	1 130	57.150(2 1/4)	88.900(3 1/2)	44.450(1 3/4)	44.700	69.850(2 3/4)	
<b>63.500</b> <b>(2 1/2)</b>	<b>GBRI 406024</b>	1 040	63.500(2 1/2)	95.250(3 3/4)	38.100(1 1/2)	38.350	76.200(3 )	
	<b>GBRI 406028</b>	1 230	63.500(2 1/2)	95.250(3 3/4)	44.450(1 3/4)	44.700	76.200(3 )	
<b>69.850</b> <b>(2 3/4)</b>	<b>GBRI 446828</b>	1 630	69.850(2 3/4)	107.950(4 1/4)	44.450(1 3/4)	44.700	82.550(3 1/4)	
	<b>GBRI 446832</b>	1 840	69.850(2 3/4)	107.950(4 1/4)	50.800(2 )	51.050	82.550(3 1/4)	
<b>76.200</b> <b>(3)</b>	<b>GBRI 487232</b>	1 970	76.200(3 )	114.300(4 1/2)	50.800(2 )	51.050	88.900(3 1/2)	
<b>82.550</b> <b>(3 1/4)</b>	<b>GBRI 527632</b>	2 110	82.550(3 1/4)	120.650(4 3/4)	50.800(2 )	51.050	95.250(3 3/4)	
<b>88.900</b> <b>(3 1/2)</b>	<b>GBRI 568032</b>	2 250	88.900(3 1/2)	127.000(5 )	50.800(2 )	51.050	101.600(4 )	
<b>95.250</b> <b>(3 3/4)</b>	<b>GBRI 608432</b>	2 380	95.250(3 3/4)	133.350(5 1/4)	50.800(2 )	51.050	107.950(4 1/4)	

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. No grease is prepacked. Perform proper lubrication.


Standard mounting dimensions mm			<sup>(1)</sup> r <sub>as max</sub>	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
d <sub>a</sub> Min.	d <sub>a</sub> Max.	D <sub>a</sub> Max.					
52.5	55	69.2	1.5	113 000	224 000	2 500	<b>LRBZ 283624</b>
52.5	55	69.2	1.5	133 000	276 000	2 500	<b>LRBZ 283628</b>
58	61	75.7	1.5	120 000	248 000	2 500	<b>LRBZ 324024</b>
58	61	75.7	1.5	141 000	306 000	2 500	<b>LRBZ 324028</b>
65	67	82	1.5	125 000	273 000	2 000	<b>LRBZ 364424</b>
65	67	82	1.5	147 000	336 000	2 000	<b>LRBZ 364428</b>
71	73	88	1.5	131 000	298 000	2 000	<b>LRBZ 404824</b>
71	73	88	1.5	154 000	368 000	2 000	<b>LRBZ 404828</b>
77	79	99.9	1.5	193 000	396 000	1 800	<b>LRBZ 445228</b>
77	79	99.9	1.5	214 000	452 000	1 800	<b>LRBZ 445232</b>
83.5	86	106.3	1.5	221 000	488 000	1 700	<b>LRBZ 485632</b>
91	93	112.6	1.5	228 000	522 000	1 600	<b>LRBZ 526032</b>
97	99	119	1.5	237 000	556 000	1 500	<b>LRBZ 566432</b>
103	105	125.3	1.5	242 000	590 000	1 400	<b>LRBZ 606832</b>

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, Without Inner Ring

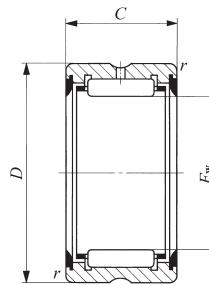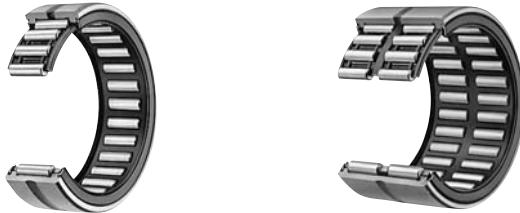


RNA49…UU  
RNA69…UU( $F_w \leq 35$ )

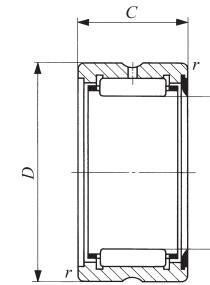


RNA49…U  
RNA69…U( $F_w \leq 35$ )

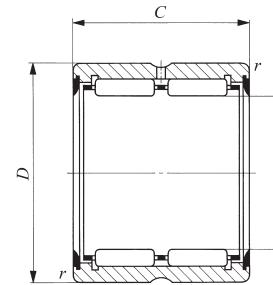

RNA69…UU

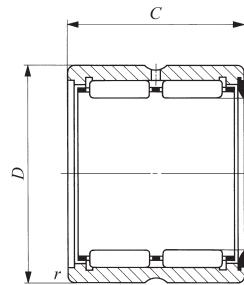

RNA69…U

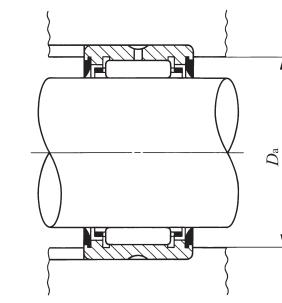

Shaft dia. 14 – 45mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm				<sup>(1)</sup> $r_s$ min
	With two seals	With one seal	With two seals	With one seal		$F_w$	$D$	$C$		
14	RNA 4900UU	RNA 4900U	—	—	16.3	14	22	13	0.3	
16	RNA 4901UU	RNA 4901U	—	RNA 6901UU	17.9	16	24	13	0.3	
	—	—	RNA 6901UU	RNA 6901U	30	16	24	22	0.3	
18	RNA 49/14UU	RNA 49/14U	—	—	19.7	18	26	13	0.3	
20	RNA 4902UU	RNA 4902U	—	RNA 6902UU	21.5	20	28	13	0.3	
	—	—	RNA 6902UU	RNA 6902U	37.5	20	28	23	0.3	
22	RNA 4903UU	RNA 4903U	—	RNA 6903UU	23	22	30	13	0.3	
	—	—	RNA 6903UU	RNA 6903U	40.5	22	30	23	0.3	
25	RNA 4904UU	RNA 4904U	—	RNA 6904UU	54.5	25	37	17	0.3	
	—	—	RNA 6904UU	RNA 6904U	95.5	25	37	30	0.3	
28	RNA 49/22UU	RNA 49/22U	—	RNA 69/22UU	55.5	28	39	17	0.3	
	—	—	RNA 69/22UU	RNA 69/22U	97.5	28	39	30	0.3	
30	RNA 4905UU	RNA 4905U	—	RNA 6905UU	63	30	42	17	0.3	
	—	—	RNA 6905UU	RNA 6905U	111	30	42	30	0.3	
32	RNA 49/28UU	RNA 49/28U	—	RNA 69/28UU	75.5	32	45	17	0.3	
	—	—	RNA 69/28UU	RNA 69/28U	133	32	45	30	0.3	
35	RNA 4906UU	RNA 4906U	—	RNA 6906UU	71	35	47	17	0.3	
	—	—	RNA 6906UU	RNA 6906U	125	35	47	30	0.3	
40	RNA 49/32UU	RNA 49/32U	—	RNA 69/32UU	94.5	40	52	20	0.6	
	—	—	RNA 69/32UU	RNA 69/32U	170	40	52	36	0.6	
42	RNA 4907UU	RNA 4907U	—	RNA 6907UU	112	42	55	20	0.6	
	—	—	RNA 6907UU	RNA 6907U	200	42	55	36	0.6	
45	RNA 49/38UU	RNA 49/38U	—	—	119	45	58	20	0.6	

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.



Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
20	8 080	8 490	14 000
22	8 470	9 320	12 000
22	15 500	20 400	12 000
24	9 260	10 800	11 000
26	9 570	11 600	9 500
26	18 500	27 100	9 500
28	10 300	13 100	8 500
28	19 800	30 600	8 500
35	18 000	20 500	7 500
35	33 000	44 600	7 500
37	18 300	23 700	7 000
37	33 800	52 000	7 000
40	20 300	25 100	6 500
40	39 200	58 700	6 500
43	21 000	26 800	6 000
43	38 900	59 100	6 000
45	21 500	28 400	5 500
45	40 100	63 000	5 500
48	29 400	44 200	5 000
48	50 300	88 300	5 000
51	30 100	46 300	4 500
51	51 600	92 600	4 500
54	31 600	50 400	4 000

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, Without Inner Ring

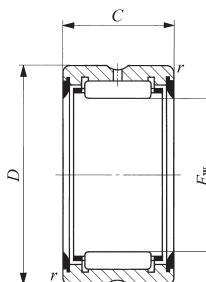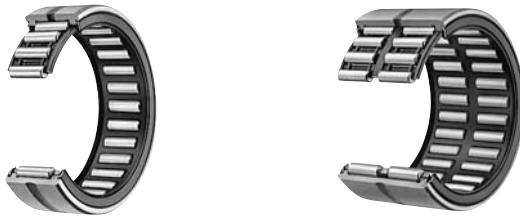


RNA49…UU

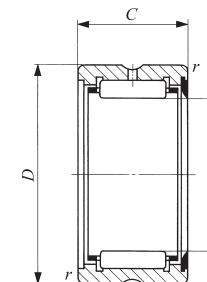


RNA49…U

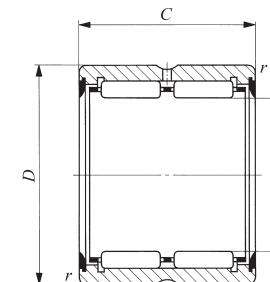

RNA69…UU

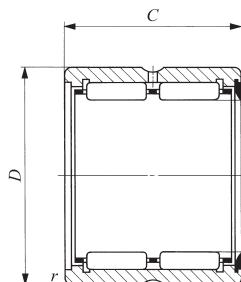

RNA69…U

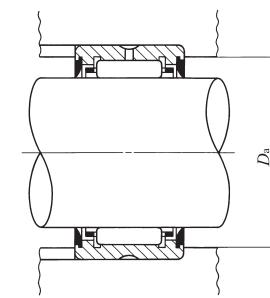

RNA69…UU

Shaft dia. 48 – 85mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		$F_w$	$D$	$C$	$r$ <sup>(1)</sup> s min
48	RNA 4908UU	RNA 4908U	—	RNA 6908UU	150	48	62	22	0.6
	—	—	—	RNA 6908U	270	48	62	40	0.6
50	RNA 49/42UU	RNA 49/42U	—	—	173	50	65	22	0.6
52	RNA 4909UU	RNA 4909U	—	RNA 6909UU	197	52	68	22	0.6
	—	—	—	RNA 6909U	355	52	68	40	0.6
55	RNA 49/48UU	RNA 49/48U	—	—	187	55	70	22	0.6
58	RNA 4910UU	RNA 4910U	—	RNA 6910UU	177	58	72	22	0.6
	—	—	—	RNA 6910U	320	58	72	40	0.6
60	RNA 49/52UU	RNA 49/52U	—	—	200	60	75	22	0.6
63	RNA 4911UU	RNA 4911U	—	RNA 6911UU	265	63	80	25	1
	—	—	—	RNA 6911U	470	63	80	45	1
65	RNA 49/58UU	RNA 49/58U	—	—	275	65	82	25	1
68	RNA 4912UU	RNA 4912U	—	RNA 6912UU	285	68	85	25	1
	—	—	—	RNA 6912U	505	68	85	45	1
70	RNA 49/62UU	RNA 49/62U	—	—	320	70	88	25	1
72	RNA 4913UU	RNA 4913U	—	RNA 6913UU	325	72	90	25	1
	—	—	—	RNA 6913U	580	72	90	45	1
75	RNA 49/68UU	RNA 49/68U	—	—	465	75	95	30	1
80	RNA 4914UU	RNA 4914U	—	RNA 6914UU	495	80	100	30	1
	—	—	—	RNA 6914U	910	80	100	54	1
85	RNA 4915UU	RNA 4915U	—	RNA 6915UU	520	85	105	30	1
	—	—	—	RNA 6915U	960	85	105	54	1

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
58	37 200	58 400	4 000
58	63 700	117 000	4 000
61	38 000	60 900	4 000
64	38 900	63 400	3 500
64	66 600	127 000	3 500
66	39 600	66 100	3 500
68	41 300	71 100	3 500
68	70 800	142 000	3 500
71	42 100	73 600	3 000
75	52 200	85 700	3 000
75	89 400	171 000	3 000
77	53 400	89 200	3 000
80	54 500	92 800	3 000
80	93 400	186 000	3 000
83	55 700	96 300	2 500
85	56 800	99 800	2 500
85	97 400	200 000	2 500
90	73 900	133 000	2 500
95	76 900	143 000	2 500
95	124 000	281 000	2 500
100	79 600	153 000	2 000
100	128 000	299 000	2 000

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, Without Inner Ring

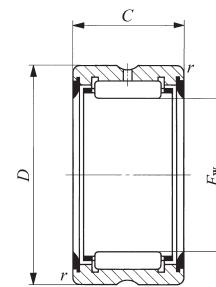


RNA49...UU

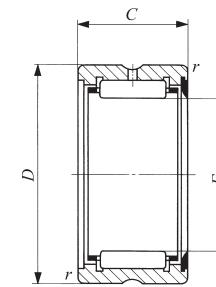


RNA49...U

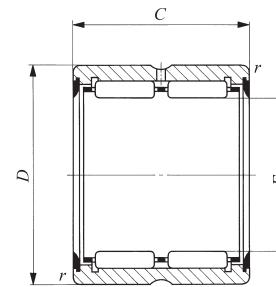

RNA69...UU

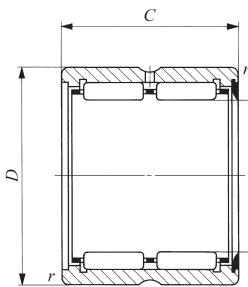

RNA69...U

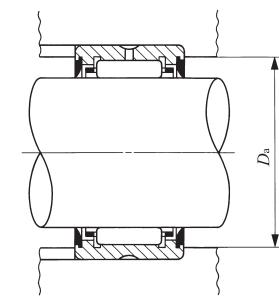

Shaft dia. 90 – 160mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		$F_w$	$D$	$C$	$r_s$ min <sup>(1)</sup>
90	RNA 4916UU	RNA 4916U	—	—	545	90	110	30	1
	—	—	RNA 6916UU	RNA 6916U	1 010	90	110	54	1
95	RNA 49/82UU	RNA 49/82U	—	—	570	95	115	30	1
100	RNA 4917UU	RNA 4917U	—	—	695	100	120	35	1.1
	—	—	RNA 6917UU	RNA 6917U	1 300	100	120	63	1.1
105	RNA 4918UU	RNA 4918U	—	—	730	105	125	35	1.1
	—	—	RNA 6918UU	RNA 6918U	1 360	105	125	63	1.1
110	RNA 4919UU	RNA 4919U	—	—	760	110	130	35	1.1
	—	—	RNA 6919UU	RNA 6919U	1 420	110	130	63	1.1
115	RNA 4920UU	RNA 4920U	—	—	1 200	115	140	40	1.1
125	RNA 4922UU	RNA 4922U	—	—	1 280	125	150	40	1.1
135	RNA 4924UU	RNA 4924U	—	—	1 940	135	165	45	1.1
150	RNA 4926UU	RNA 4926U	—	—	2 360	150	180	50	1.5
160	RNA 4928UU	RNA 4928U	—	—	2 510	160	190	50	1.5

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


Standard mounting dimension $D_a$ Max. mm	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
105	80 700	158 000	2 000
105	132 000	317 000	2 000
110	83 200	168 000	2 000
113.5	103 000	225 000	1 900
113.5	168 000	448 000	1 900
118.5	106 000	238 000	1 800
118.5	172 000	471 000	1 800
123.5	109 000	250 000	1 700
123.5	177 000	493 000	1 700
133.5	134 000	297 000	1 700
143.5	140 000	322 000	1 500
158.5	178 000	410 000	1 400
172	206 000	511 000	1 300
182	214 000	549 000	1 200

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, With Inner Ring

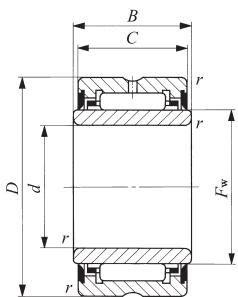


NA49…UU  
NA69…UU( $d \leq 30$ )

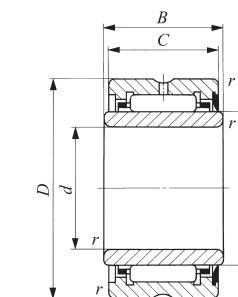


NA49…U  
NA69…U( $d \leq 30$ )

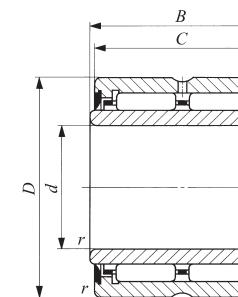

NA69…UU

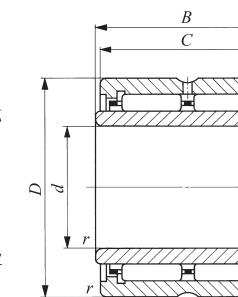

NA69…U

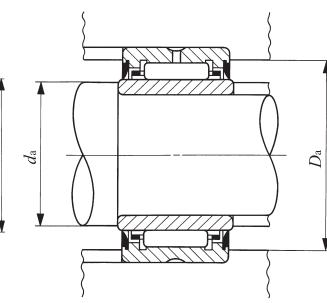

NA  
TAFI  
TRI  
BRI

Shaft dia. 10 – 40mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		d	D	C	B
10	NA 4900UU	NA 4900U	—	—	24.5	10	22	13	14
12	NA 4901UU	NA 4901U	—	—	27.5	12	24	13	14
	—	—	NA 6901UU	NA 6901U	45.5	12	24	22	23
15	NA 4902UU	NA 4902U	—	—	36	15	28	13	14
	—	—	NA 6902UU	NA 6902U	62.5	15	28	23	24
17	NA 4903UU	NA 4903U	—	—	39.5	17	30	13	14
	—	—	NA 6903UU	NA 6903U	68.5	17	30	23	24
20	NA 4904UU	NA 4904U	—	—	78.5	20	37	17	18
	—	—	NA 6904UU	NA 6904U	137	20	37	30	31
22	NA 49/22UU	NA 49/22U	—	—	87.5	22	39	17	18
	—	—	NA 69/22UU	NA 69/22U	153	22	39	30	31
25	NA 4905UU	NA 4905U	—	—	92.5	25	42	17	18
	—	—	NA 6905UU	NA 6905U	162	25	42	30	31
28	NA 49/28UU	NA 49/28U	—	—	101	28	45	17	18
	—	—	NA 69/28UU	NA 69/28U	177	28	45	30	31
30	NA 4906UU	NA 4906U	—	—	106	30	47	17	18
	—	—	NA 6906UU	NA 6906U	185	30	47	30	31
32	NA 49/32UU	NA 49/32U	—	—	167	32	52	20	21
	—	—	NA 69/32UU	NA 69/32U	300	32	52	36	37
35	NA 4907UU	NA 4907U	—	—	179	35	55	20	21
	—	—	NA 6907UU	NA 6907U	320	35	55	36	37
40	NA 4908UU	NA 4908U	—	—	245	40	62	22	23
	—	—	NA 6908UU	NA 6908U	440	40	62	40	41

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

(2) Allowable rotational speed applies to grease lubrication.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


$r_s$ min <sup>(1)</sup>	$F_w$	Standard mounting dimensions mm		Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
		Min.	Max.				
0.3	14	12	13	20	8 080	8 490	14 000 <b>LRTZ 101414</b>
0.3	16	14	15	22	8 470	9 320	12 000 <b>LRTZ 121614</b>
0.3	16	14	15	22	15 500	20 400	12 000 <b>LRTZ 121623</b>
0.3	20	17	19	26	9 570	11 600	9 500 <b>LRTZ 152014</b>
0.3	20	17	19	26	18 500	27 100	9 500 <b>LRTZ 152024</b>
0.3	22	19	21	28	10 300	13 100	8 500 <b>LRTZ 172214</b>
0.3	22	19	21	28	19 800	30 600	8 500 <b>LRTZ 172224</b>
0.3	25	22	24	35	18 000	20 500	7 500 <b>LRTZ 202518</b>
0.3	25	22	24	35	33 000	44 600	7 500 <b>LRTZ 202531</b>
0.3	28	24	27	37	18 300	23 700	7 000 <b>LRTZ 222818</b>
0.3	28	24	27	37	33 800	52 000	7 000 <b>LRTZ 222831</b>
0.3	30	27	29	40	20 300	25 100	6 500 <b>LRTZ 253018</b>
0.3	30	27	29	40	39 200	58 700	6 500 <b>LRTZ 253031</b>
0.3	32	30	31	43	21 000	26 800	6 000 <b>LRTZ 283218</b>
0.3	32	30	31	43	38 900	59 100	6 000 <b>LRTZ 283231</b>
0.3	35	32	34	45	21 500	28 400	5 500 <b>LRTZ 303518</b>
0.3	35	32	34	45	40 100	63 000	5 500 <b>LRTZ 303531</b>
0.6	40	36	39	48	29 400	44 200	5 000 <b>LRTZ 324021</b>
0.6	40	36	39	48	50 300	88 300	5 000 <b>LRTZ 324037</b>
0.6	42	39	41	51	30 100	46 300	4 500 <b>LRTZ 354221</b>
0.6	42	39	41	51	51 600	92 600	4 500 <b>LRTZ 354237</b>
0.6	48	44	47	58	37 200	58 400	4 000 <b>LRTZ 404823</b>
0.6	48	44	47	58	63 700	117 000	4 000 <b>LRTZ 404841</b>

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, With Inner Ring

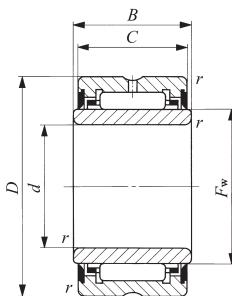


NA49…UU

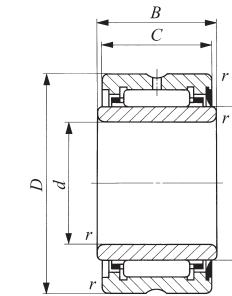


NA49…U

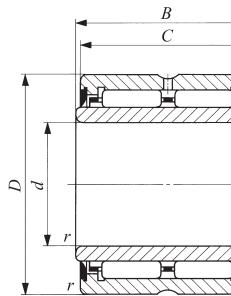

NA69…UU

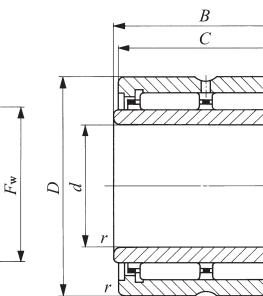

NA69…U

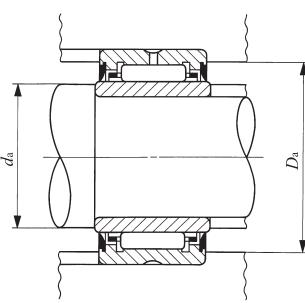

NA  
TAFI  
TRI  
BRI

Shaft dia. 45 – 110mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		d	D	C	B
45	NA 4909UU	NA 4909U	—	NA 6909UU	290	45	68	22	23
	—	—	NA 6909UU	NA 6909U	520	45	68	40	41
50	NA 4910UU	NA 4910U	—	NA 6910UU	295	50	72	22	23
	—	—	NA 6910UU	NA 6910U	530	50	72	40	41
55	NA 4911UU	NA 4911U	—	NA 6911UU	415	55	80	25	26
	—	—	NA 6911UU	NA 6911U	730	55	80	45	46
60	NA 4912UU	NA 4912U	—	NA 6912UU	445	60	85	25	26
	—	—	NA 6912UU	NA 6912U	785	60	85	45	46
65	NA 4913UU	NA 4913U	—	NA 6913UU	475	65	90	25	26
	—	—	NA 6913UU	NA 6913U	845	65	90	45	46
70	NA 4914UU	NA 4914U	—	NA 6914UU	770	70	100	30	31
	—	—	NA 6914UU	NA 6914U	1 400	70	100	54	55
75	NA 4915UU	NA 4915U	—	NA 6915UU	815	75	105	30	31
	—	—	NA 6915UU	NA 6915U	1 480	75	105	54	55
80	NA 4916UU	NA 4916U	—	NA 6916UU	860	80	110	30	31
	—	—	NA 6916UU	NA 6916U	1 570	80	110	54	55
85	NA 4917UU	NA 4917U	—	NA 6917UU	1 300	85	120	35	36
	—	—	NA 6917UU	NA 6917U	2 360	85	120	63	64
90	NA 4918UU	NA 4918U	—	NA 6918UU	1 360	90	125	35	36
	—	—	NA 6918UU	NA 6918U	2 480	90	125	63	64
95	NA 4919UU	NA 4919U	—	NA 6919UU	1 420	95	130	35	36
	—	—	NA 6919UU	NA 6919U	2 600	95	130	63	64
100	NA 4920UU	NA 4920U	—	—	1 980	100	140	40	41
110	NA 4922UU	NA 4922U	—	—	2 150	110	150	40	41

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.




Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

$r_s \text{ min.}^{(1)}$	$F_w$	Standard mounting dimensions mm		Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
		Min. $d_a$	Max. $D_a$				
0.6	52	49	51	64	38 900	63 400	LRTZ 455223
	52	49	51	64	66 600	127 000	LRTZ 455241
0.6	58	54	57	68	41 300	71 100	LRTZ 505823
	58	54	57	68	70 800	142 000	LRTZ 505841
1	63	60	61	75	52 200	85 700	LRTZ 556326
	63	60	61	75	89 400	171 000	LRTZ 556346
1	68	65	66	80	54 500	92 800	LRTZ 606826
	68	65	66	80	93 400	186 000	LRTZ 606846
1	72	70	70.5	85	56 800	99 800	LRTZ 657226
	72	70	70.5	85	97 400	200 000	LRTZ 657246
1	80	75	78	95	76 900	143 000	LRTZ 708031
	80	75	78	95	124 000	281 000	LRTZ 708055
1	85	80	83	100	79 600	153 000	LRTZ 758531
	85	80	83	100	128 000	299 000	LRTZ 758555
1	90	85	88	105	80 700	158 000	LRTZ 809031
	90	85	88	105	132 000	317 000	LRTZ 809055
1.1	100	91.5	98	113.5	103 000	225 000	LRTZ 8510036
	100	91.5	98	113.5	168 000	448 000	LRTZ 8510064
1.1	105	96.5	103	118.5	106 000	238 000	LRTZ 9010536
	105	96.5	103	118.5	172 000	471 000	LRTZ 9010564
1.1	110	101.5	108	123.5	109 000	250 000	LRTZ 9511036
	110	101.5	108	123.5	177 000	493 000	LRTZ 9511064
1.1	115	106.5	113	133.5	134 000	297 000	LRTZ 10011541
	125	116.5	123	143.5	140 000	322 000	LRTZ 11012541

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, With Inner Ring

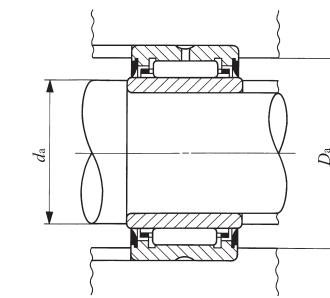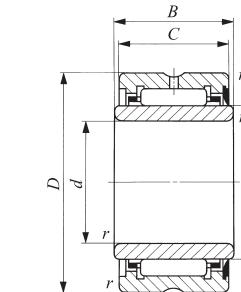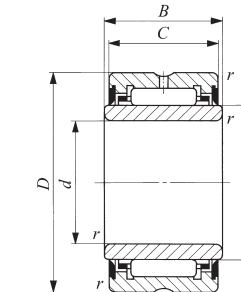

NA49...UU

NA49...U

Shaft dia. 120 – 140mm

Shaft dia. mm	Identification number				Mass (Ref.) g	Boundary dimensions mm			
	With two seals	With one seal	With two seals	With one seal		d	D	C	B
120	NA 4924UU	NA 4924U	—	—	2 990	120	165	45	46
130	NA 4926UU	NA 4926U	—	—	4 080	130	180	50	51
140	NA 4928UU	NA 4928U	—	—	4 340	140	190	50	51

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


$r_s^{(1)}$	$F_w$	Standard mounting dimensions mm		Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.					
1.1	135	126.5	133	158.5	178 000	410 000	1 400	LRTZ 12013546
1.5	150	138	148	172	206 000	511 000	1 300	LRTZ 13015051
1.5	160	148	158	182	214 000	549 000	1 200	LRTZ 14016051

## MACHINED TYPE NEEDLE ROLLER


With Seal, Without Inner Ring, Inch Series

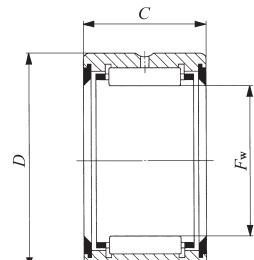

BR...UU

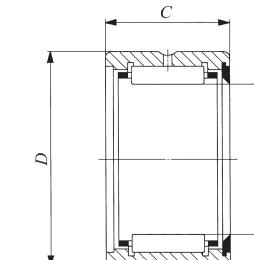

BR...U

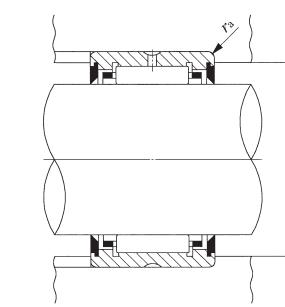

Shaft dia. 15.875 – 50.800mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		$F_w$	D	C
15.875 ( $\frac{5}{8}$ )	<b>BR 101816 UU</b>	<b>BR 101816 U</b>	54	15.875 ( $\frac{5}{8}$ )	28.575 ( $1\frac{1}{8}$ )	25.400 (1 )
19.050 ( $\frac{3}{4}$ )	<b>BR 122016 UU</b>	<b>BR 122016 U</b>	68	19.050 ( $\frac{3}{4}$ )	31.750 ( $1\frac{1}{4}$ )	25.400 (1 )
22.225 ( $\frac{7}{8}$ )	<b>BR 142216 UU</b>	<b>BR 142216 U</b>	76	22.225 ( $\frac{7}{8}$ )	34.925 ( $1\frac{3}{8}$ )	25.400 (1 )
25.400 (1 )	<b>BR 162416 UU</b>	<b>BR 162416 U</b>	83	25.400 (1 )	38.100 ( $1\frac{1}{2}$ )	25.400 (1 )
28.575 ( $1\frac{1}{8}$ )	<b>BR 182620 UU</b>	<b>BR 182620 U</b>	115	28.575 ( $1\frac{1}{8}$ )	41.275 ( $1\frac{5}{8}$ )	31.750 ( $1\frac{1}{4}$ )
31.750 ( $1\frac{1}{4}$ )	<b>BR 202820 UU</b>	<b>BR 202820 U</b>	124	31.750 ( $1\frac{1}{4}$ )	44.450 ( $1\frac{3}{4}$ )	31.750 ( $1\frac{1}{4}$ )
34.925 ( $1\frac{3}{8}$ )	<b>BR 223020 UU</b>	<b>BR 223020 U</b>	134	34.925 ( $1\frac{3}{8}$ )	47.625 ( $1\frac{7}{8}$ )	31.750 ( $1\frac{1}{4}$ )
38.100 ( $1\frac{1}{2}$ )	<b>BR 243320 UU</b>	<b>BR 243320 U</b>	168	38.100 ( $1\frac{1}{2}$ )	52.388 ( $2\frac{1}{16}$ )	31.750 ( $1\frac{1}{4}$ )
41.275 ( $1\frac{5}{8}$ )	<b>BR 263520 UU</b>	<b>BR 263520 U</b>	179	41.275 ( $1\frac{5}{8}$ )	55.562 ( $2\frac{5}{16}$ )	31.750 ( $1\frac{1}{4}$ )
44.450 ( $1\frac{3}{4}$ )	<b>BR 283720 UU</b>	<b>BR 283720 U</b>	193	44.450 ( $1\frac{3}{4}$ )	58.738 ( $2\frac{5}{16}$ )	31.750 ( $1\frac{1}{4}$ )
47.625 ( $1\frac{7}{8}$ )	<b>BR 303920 UU</b>	<b>BR 303920 U</b>	202	47.625 ( $1\frac{7}{8}$ )	61.912 ( $2\frac{7}{16}$ )	31.750 ( $1\frac{1}{4}$ )
50.800 (2 )	<b>BR 324120 UU</b>	<b>BR 324120 U</b>	216	50.800 (2 )	65.088 ( $2\frac{9}{16}$ )	31.750 ( $1\frac{1}{4}$ )

Notes<sup>(1)</sup> Maximum permissible corner radius of the housing.

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


Standard mounting dimensions mm $D_a$ Max.	$r_a$ as max ( <sup>1</sup> )	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
24.5	0.6	18 300	20 000	12 000
26.5	1.0	20 700	24 400	10 000
29.7	1.0	21 600	26 900	9 000
32.9	1.0	23 600	31 300	8 000
36.0	1.0	34 900	49 900	7 000
39.2	1.0	36 000	53 500	6 500
42.4	1.0	38 500	60 000	5 500
45.1	1.5	43 700	66 900	5 500
48.3	1.5	44 800	70 900	4 500
51.5	1.5	47 500	78 200	4 500
54.7	1.5	48 500	82 100	4 000
57.8	1.5	51 000	89 400	4 000

## MACHINED TYPE NEEDLE ROLLER


With Seal, Without Inner Ring, Inch Series

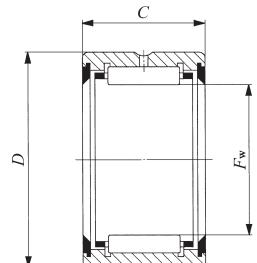

BR...UU

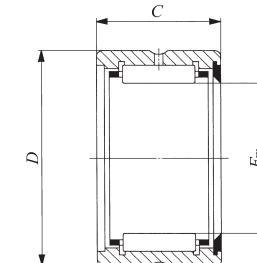

BR...U

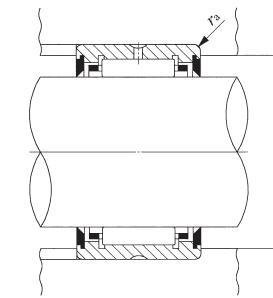

Shaft dia. 57.150 – 95.250mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		F <sub>w</sub>	D	C
57.150 (2 1/4)	<b>BR 364828 UU</b>	<b>BR 364828 U</b>	459	57.150 (2 1/4)	76.200 (3 )	44.450 (1 3/4)
63.500 (2 1/2)	<b>BR 405228 UU</b>	<b>BR 405228 U</b>	499	63.500 (2 1/2)	82.550 (3 1/4)	44.450 (1 3/4)
69.850 (2 3/4)	<b>BR 445628 UU</b>	<b>BR 445628 U</b>	540	69.850 (2 3/4)	88.900 (3 1/2)	44.450 (1 3/4)
76.200 (3 )	<b>BR 486028 UU</b>	<b>BR 486028 U</b>	585	76.200 (3 )	95.250 (3 3/4)	44.450 (1 3/4)
82.550 (3 1/4)	<b>BR 526828 UU</b>	<b>BR 526828 U</b>	891	82.550 (3 1/4)	107.950 (4 1/4)	44.450 (1 3/4)
88.900 (3 1/2)	<b>BR 567232 UU</b>	<b>BR 567232 U</b>	1 098	88.900 (3 1/2)	114.300 (4 1/2)	50.800 (2 )
95.250 (3 3/4)	<b>BR 607632 UU</b>	<b>BR 607632 U</b>	1 161	95.250 (3 3/4)	120.650 (4 3/4)	50.800 (2 )

Notes<sup>(1)</sup> Maximum permissible corner radius of the housing.

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


Standard mounting dimensions mm D <sub>a</sub> Max.	r <sub>as max</sub> <sup>(1)</sup>	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	
				3 500	3 000
69.0	1.5	90 300	158 000	2 500	2 500
74.3	2.0	94 600	174 000	2 500	2 500
80.7	2.0	98 700	189 000	2 500	2 500
87.0	2.0	105 000	211 000	2 500	2 500
99.7	2.0	109 000	227 000	2 500	2 500
106.1	2.0	142 000	265 000	2 000	2 000
111.4	2.5	148 000	287 000	2 000	2 000

## MACHINED TYPE NEEDLE ROLLER


With Seal, With Inner Ring, Inch Series

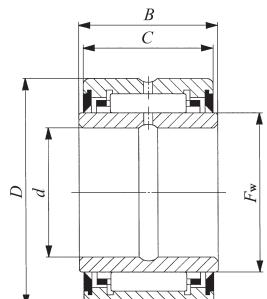

BRI...UU

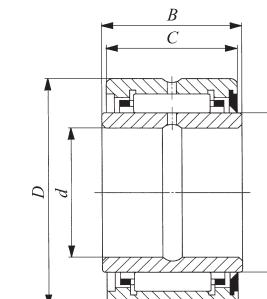

BRI...U

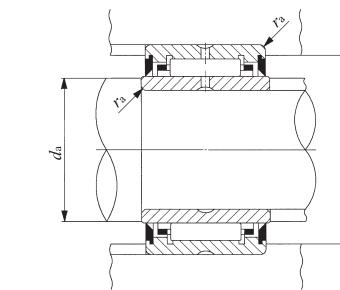

Shaft dia. 9.525 – 44.450mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)			
	With two seals	With one seal		d	D	C	B
9.525 ( $\frac{3}{8}$ )	BRI 61816 UU	BRI 61816 U	79	9.525 ( $\frac{3}{8}$ )	28.575 ( $1\frac{1}{8}$ )	25.400 (1)	25.650
12.700 ( $\frac{1}{2}$ )	BRI 82016 UU	BRI 82016 U	99	12.700 ( $\frac{1}{2}$ )	31.750 ( $1\frac{1}{4}$ )	25.400 (1)	25.650
15.875 ( $\frac{5}{8}$ )	BRI 102216 UU	BRI 102216 U	113.5	15.875 ( $\frac{5}{8}$ )	34.925 ( $1\frac{3}{8}$ )	25.400 (1)	25.650
19.050 ( $\frac{3}{4}$ )	BRI 122416 UU	BRI 122416 U	127	19.050 ( $\frac{3}{4}$ )	38.100 ( $1\frac{1}{2}$ )	25.400 (1)	25.650
22.225 ( $\frac{7}{8}$ )	BRI 142620 UU	BRI 142620 U	177	22.225 ( $\frac{7}{8}$ )	41.275 ( $1\frac{5}{8}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
25.400 (1)	BRI 162820 UU	BRI 162820 U	196	25.400 (1)	44.450 ( $1\frac{3}{4}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
28.575 ( $1\frac{1}{8}$ )	BRI 183020 UU	BRI 183020 U	211	28.575 ( $1\frac{1}{8}$ )	47.625 ( $1\frac{7}{8}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
31.750 ( $1\frac{1}{4}$ )	BRI 203320 UU	BRI 203320 U	254	31.750 ( $1\frac{1}{4}$ )	52.388 ( $2\frac{5}{16}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
34.925 ( $1\frac{3}{8}$ )	BRI 223520 UU	BRI 223520 U	275	34.925 ( $1\frac{3}{8}$ )	55.562 ( $2\frac{3}{16}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
38.100 ( $1\frac{1}{2}$ )	BRI 243720 UU	BRI 243720 U	293	38.100 ( $1\frac{1}{2}$ )	58.738 ( $2\frac{5}{16}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
	BRI 243920 UU	BRI 243920 U	362	38.100 ( $1\frac{1}{2}$ )	61.912 ( $2\frac{7}{16}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
41.275 ( $1\frac{5}{8}$ )	BRI 264120 UU	BRI 264120 U	386	41.275 ( $1\frac{5}{8}$ )	65.088 ( $2\frac{9}{16}$ )	31.750 ( $1\frac{1}{4}$ )	32.000
44.450 ( $1\frac{3}{4}$ )	BRI 284828 UU	BRI 284828 U	804	44.450 ( $1\frac{3}{4}$ )	76.200 (3)	44.450 ( $1\frac{3}{4}$ )	44.700

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks1. The inner ring and the outer ring each have an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


$F_w$	Standard mounting dimensions mm			$r_{as\ max}^{(1)}$	$C$	$C_0$	Allowable rotational speed <sup>(2)</sup>	Assembled inner ring
	$d_a$ Min.	$d_a$ Max.	$D_a$ Max.					
15.875 ( $\frac{5}{8}$ )	14	14.5	24.5	0.6	18 300	20 000	12 000	LRBZ 61016 B
19.050 ( $\frac{3}{4}$ )	17.5	18	26.5	0.6	20 700	24 400	10 000	LRBZ 81216 B
22.225 ( $\frac{7}{8}$ )	21	21.2	29.7	0.6	21 600	26 900	9 000	LRBZ 101416 B
25.400 (1)	24	24.4	32.9	0.6	23 600	31 300	8 000	LRBZ 121616 B
28.575 ( $1\frac{1}{8}$ )	27	27.5	36.0	0.6	34 900	49 900	7 000	LRBZ 141820 B
31.750 ( $1\frac{1}{4}$ )	30.5	30.7	39.2	0.6	36 000	53 500	6 500	LRBZ 162020 B
34.925 ( $1\frac{3}{8}$ )	33.5	33.9	42.4	0.6	38 500	60 000	5 500	LRBZ 182220 B
38.100 ( $1\frac{1}{2}$ )	37	37.1	45.1	0.6	43 700	66 900	5 500	LRBZ 202420 B
41.275 ( $1\frac{5}{8}$ )	40.2	40.2	48.3	0.6	44 800	70 900	4 500	LRBZ 222620 B
44.450 ( $1\frac{3}{4}$ ) 47.625 ( $1\frac{7}{8}$ )	43.3	43.4	51.5	0.6	47 500	78 200	4 500	LRBZ 242820 B
	43.3	45	54.7	1	48 500	82 100	4 000	LRBZ 243020 B
50.800 (2)	48	49	57.8	1	51 000	89 400	4 000	LRBZ 263220 B
57.150 ( $2\frac{1}{4}$ )	52.5	55	69.0	1.5	90 300	158 000	3 500	LRBZ 283628 B

## MACHINED TYPE NEEDLE ROLLER


With Seal, With Inner Ring, Inch Series

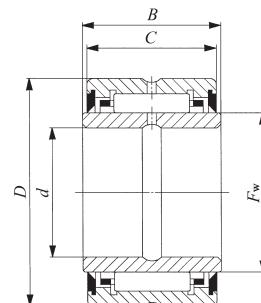

BRI...UU

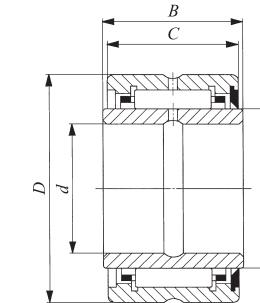

BRI...U

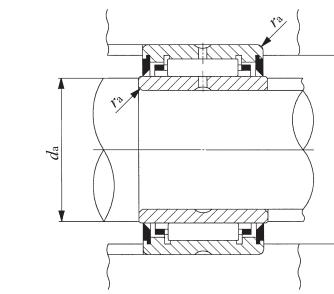

Shaft dia. 50.800 – 82.550mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)			
	With two seals	With one seal		d	D	C	B
50.800 (2)	<b>BRI 325228 UU</b>	<b>BRI 325228 U</b>	889	50.800 (2 )	82.550 (3 1/4)	44.450 (1 3/4)	44.700
57.150 (2 1/4)	<b>BRI 365628 UU</b>	<b>BRI 365628 U</b>	980	57.150 (2 1/4)	88.900 (3 1/2)	44.450 (1 3/4)	44.700
63.500 (2 1/2)	<b>BRI 406028 UU</b>	<b>BRI 406028 U</b>	1 065	63.500 (2 1/2)	95.250 (3 3/4)	44.450 (1 3/4)	44.700
69.850 (2 3/4)	<b>BRI 446828 UU</b>	<b>BRI 446828 U</b>	1 421	69.850 (2 3/4)	107.950 (4 1/4)	44.450 (1 3/4)	44.700
76.200 (3)	<b>BRI 487232 UU</b>	<b>BRI 487232 U</b>	1 738	76.200 (3 )	114.300 (4 1/2)	50.800 (2 )	51.050
82.550 (3 1/4)	<b>BRI 527632 UU</b>	<b>BRI 527632 U</b>	1 851	82.550 (3 1/4)	120.650 (4 3/4)	50.800 (2 )	51.050

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.




Remarks1. The inner ring and the outer ring each have an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

$F_w$	Standard mounting dimensions mm			Basic dynamic load rating <sup>(1)</sup> C N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
	$d_a$ Min.	$d_a$ Max.	$D_a$ Max.					
63.500 (2 1/2)	58	61	74.3	1.5	94 600	174 000	3 000	<b>LRBZ 324028 B</b>
69.850 (2 3/4)	65	67	80.7	1.5	98 700	189 000	2 500	<b>LRBZ 364428 B</b>
76.200 (3 )	71	73	87.0	1.5	105 000	211 000	2 500	<b>LRBZ 404828 B</b>
82.550 (3 1/4)	77	79	99.7	1.5	109 000	227 000	2 500	<b>LRBZ 445228 B</b>
88.900 (3 1/2)	83.5	86	106.1	1.5	142 000	265 000	2 000	<b>LRBZ 485632 B</b>
95.250 (3 3/4)	91	93	111.4	1.5	148 000	287 000	2 000	<b>LRBZ 526032 B</b>

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, Without Inner Ring, Inch Series

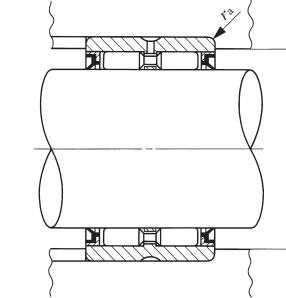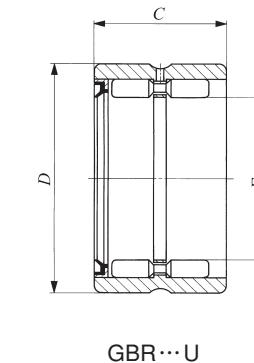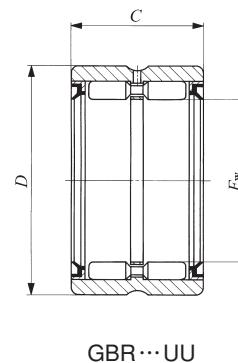

Shaft dia. 15.875 – 50.800mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		$F_w$	D	C
15.875 ( $\frac{5}{8}$ )	GBR 101816 UU	GBR 101816 U	69.5	15.875( $\frac{5}{8}$ )	28.575( $1\frac{1}{8}$ )	25.400( $1\frac{1}{8}$ )
19.050 ( $\frac{3}{4}$ )	GBR 122016 UU	GBR 122016 U	79	19.050( $\frac{3}{4}$ )	31.750( $1\frac{1}{4}$ )	25.400( $1\frac{1}{8}$ )
22.225 ( $\frac{7}{8}$ )	GBR 142216 UU	GBR 142216 U	89.5	22.225( $\frac{7}{8}$ )	34.925( $1\frac{3}{8}$ )	25.400( $1\frac{1}{8}$ )
25.400 (1)	GBR 162416 UU	GBR 162416 U	99	25.400(1)	38.100( $1\frac{1}{2}$ )	25.400( $1\frac{1}{8}$ )
28.575 ( $1\frac{1}{8}$ )	GBR 182620 UU	GBR 182620 U	139	28.575( $1\frac{1}{8}$ )	41.275( $1\frac{5}{8}$ )	31.750( $1\frac{1}{4}$ )
31.750 ( $1\frac{1}{4}$ )	GBR 202820 UU	GBR 202820 U	152	31.750( $1\frac{1}{4}$ )	44.450( $1\frac{3}{4}$ )	31.750( $1\frac{1}{4}$ )
34.925 ( $1\frac{3}{8}$ )	GBR 223020 UU	GBR 223020 U	163	34.925( $1\frac{3}{8}$ )	47.625( $1\frac{1}{8}$ )	31.750( $1\frac{1}{4}$ )
38.100 ( $1\frac{1}{2}$ )	GBR 243320 UU	GBR 243320 U	200	38.100( $1\frac{1}{2}$ )	52.388( $2\frac{1}{16}$ )	31.750( $1\frac{1}{4}$ )
41.275 ( $1\frac{5}{8}$ )	GBR 263520 UU	GBR 263520 U	215	41.275( $1\frac{5}{8}$ )	55.562( $2\frac{3}{16}$ )	31.750( $1\frac{1}{4}$ )
44.450 ( $1\frac{3}{4}$ )	GBR 283720 UU	GBR 283720 U	230	44.450( $1\frac{3}{4}$ )	58.738( $2\frac{5}{16}$ )	31.750( $1\frac{1}{4}$ )
47.625 ( $1\frac{7}{8}$ )	GBR 303920 UU	GBR 303920 U	240	47.625( $1\frac{7}{8}$ )	61.912( $2\frac{1}{16}$ )	31.750( $1\frac{1}{4}$ )
50.800 (2)	GBR 324120 UU	GBR 324120 U	255	50.800(2)	65.088( $2\frac{9}{16}$ )	31.750( $1\frac{1}{4}$ )

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


Standard mounting dimensions mm $D_a$ Max.	$r_{as\ max}$ ( <sup>1</sup> )	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	
				24.5	0.6
27	0.6	26 400	34 500	4 000	
30	0.6	28 600	40 100	3 500	
33.3	0.6	31 000	46 100	3 000	
36.3	0.6	43 900	75 300	3 000	
39.6	0.6	46 600	83 900	2 500	
42.8	0.6	49 500	91 800	2 500	
47.3	0.6	54 200	97 700	2 000	
50.5	0.6	56 600	105 000	1 900	
53.7	0.6	58 900	114 000	1 800	
56.2	1	61 100	121 000	1 700	
59.2	1	63 100	130 000	1 600	

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, Without Inner Ring, Inch Series

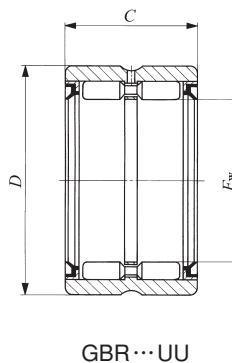

GBR...UU

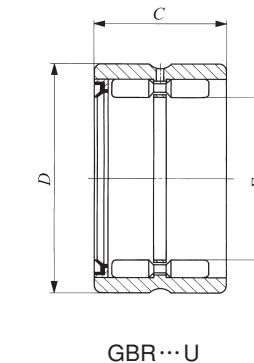

GBR...U

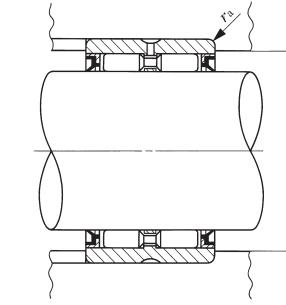

Shaft dia. 57.150 – 107.950mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		F <sub>w</sub>	D	C
57.150 (2 1/4)	GBR 364828 UU	GBR 364828 U	515	57.150(2 1/4)	76.200(3 )	44.450(1 3/4)
63.500 (2 1/2)	GBR 405228 UU	GBR 405228 U	560	63.500(2 1/2)	82.550(3 1/4)	44.450(1 3/4)
69.850 (2 3/4)	GBR 445628 UU	GBR 445628 U	610	69.850(2 3/4)	88.900(3 1/2)	44.450(1 3/4)
76.200 (3 )	GBR 486028 UU	GBR 486028 U	660	76.200(3 )	95.250(3 3/4)	44.450(1 3/4)
82.550 (3 1/4)	GBR 526828 UU	GBR 526828 U	960	82.550(3 1/4)	107.950(4 1/4)	44.450(1 3/4)
88.900 (3 1/2)	GBR 567232 UU	GBR 567232 U	1 240	88.900(3 1/2)	114.300(4 1/2)	50.800(2 )
95.250 (3 3/4)	GBR 607632 UU	GBR 607632 U	1 320	95.250(3 3/4)	120.650(4 3/4)	50.800(2 )
101.600 (4 )	GBR 648032 UU	GBR 648032 U	1 380	101.600(4 )	127.000(5 )	50.800(2 )
107.950 (4 1/4)	GBR 688432 UU	GBR 688432 U	1 460	107.950(4 1/4)	133.350(5 1/4)	50.800(2 )

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.




Remarks 1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

Standard mounting dimensions mm  D <sub>a</sub> Max.	r <sub>as max</sub> <sup>(1)</sup> N	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	
				1 400	1 300
69.2	1.5	87 500	161 000	1 400	1 300
75.7	1.5	93 300	179 000	1 100	1 100
88	1.5	101 000	215 000	1 100	950
106.3	1.5	127 000	231 000	900	850
112.6	1.5	170 000	347 000	800	750
119	1.5	182 000	395 000	800	750
125.3	1.5	186 000	419 000	750	750

## MACHINED TYPE NEEDLE ROLLER BEARINGS

With Seal, With Inner Ring, Inch Series

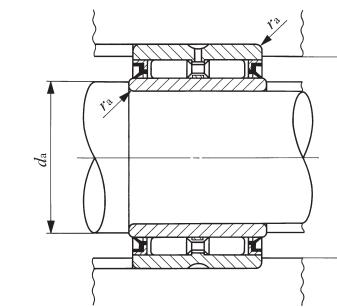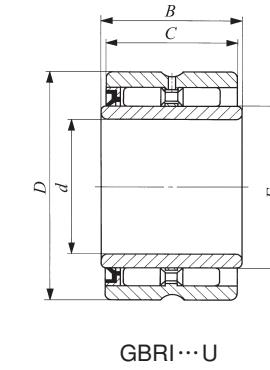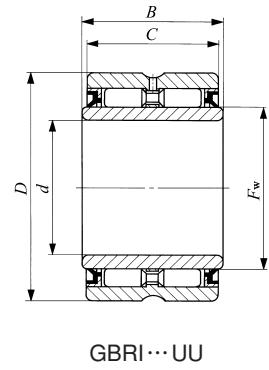

Shaft dia. 9.525 – 44.450mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
9.525 ( $\frac{3}{8}$ )	GBRI 61816 UU	GBRI 61816 U	94.5	9.525( $\frac{3}{8}$ )	28.575( $1\frac{1}{8}$ )	25.400( $1\frac{1}{8}$ )
12.700 ( $\frac{1}{2}$ )	GBRI 82016 UU	GBRI 82016 U	110	12.700( $\frac{1}{2}$ )	31.750( $1\frac{1}{4}$ )	25.400( $1\frac{1}{8}$ )
15.875 ( $\frac{5}{8}$ )	GBRI 102216 UU	GBRI 102216 U	127	15.875( $\frac{5}{8}$ )	34.925( $1\frac{3}{8}$ )	25.400( $1\frac{1}{8}$ )
19.050 ( $\frac{3}{4}$ )	GBRI 122416 UU	GBRI 122416 U	143	19.050( $\frac{3}{4}$ )	38.100( $1\frac{1}{2}$ )	25.400( $1\frac{1}{8}$ )
22.225 ( $\frac{7}{8}$ )	GBRI 142620 UU	GBRI 142620 U	200	22.225( $\frac{7}{8}$ )	41.275( $1\frac{5}{8}$ )	31.750( $1\frac{1}{4}$ )
25.400 (1)	GBRI 162820 UU	GBRI 162820 U	220	25.400(1)	44.450( $1\frac{3}{8}$ )	31.750( $1\frac{1}{4}$ )
28.575 ( $1\frac{1}{8}$ )	GBRI 183020 UU	GBRI 183020 U	240	28.575( $1\frac{1}{8}$ )	47.625( $1\frac{1}{8}$ )	31.750( $1\frac{1}{4}$ )
31.750 ( $1\frac{1}{4}$ )	GBRI 203320 UU	GBRI 203320 U	286	31.750( $1\frac{1}{4}$ )	52.388( $2\frac{1}{16}$ )	31.750( $1\frac{1}{4}$ )
34.925 ( $1\frac{3}{8}$ )	GBRI 223520 UU	GBRI 223520 U	311	34.925( $1\frac{3}{8}$ )	55.562( $2\frac{3}{16}$ )	31.750( $1\frac{1}{4}$ )
38.100 ( $1\frac{1}{2}$ )	GBRI 243720 UU	GBRI 243720 U	330	38.100( $1\frac{1}{2}$ )	58.738( $2\frac{5}{16}$ )	31.750( $1\frac{1}{4}$ )
	GBRI 243920 UU	GBRI 243920 U	400	38.100( $1\frac{1}{2}$ )	61.912( $2\frac{7}{16}$ )	31.750( $1\frac{1}{4}$ )
41.275 ( $1\frac{5}{8}$ )	GBRI 264120 UU	GBRI 264120 U	425	41.275( $1\frac{5}{8}$ )	65.088( $2\frac{9}{16}$ )	31.750( $1\frac{1}{4}$ )
44.450 ( $1\frac{3}{4}$ )	GBRI 284828 UU	GBRI 284828 U	860	44.450( $1\frac{3}{4}$ )	76.200( $3\frac{1}{8}$ )	44.450( $1\frac{3}{4}$ )

Notes<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.


Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.


B	$F_w$	Standard mounting dimensions mm			Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
		$d_a$ Min.	$d_a$ Max.	$D_a$ Max.				
25.650	15.875( $\frac{5}{8}$ )	14	14.5	24.5	0.6	23 500	28 500	5 000
25.650	19.050( $\frac{3}{4}$ )	17.5	18	27	0.6	26 400	34 500	4 000
25.650	22.225( $\frac{7}{8}$ )	21	21.2	30	0.6	28 600	40 100	3 500
25.650	25.400(1)	24	24.4	33.3	0.6	31 000	46 100	3 000
32.000	28.575( $1\frac{1}{8}$ )	27	27.5	36.3	0.6	43 900	75 300	3 000
32.000	31.750( $1\frac{1}{4}$ )	30.5	30.7	39.6	0.6	46 600	83 900	2 500
32.000	34.925( $1\frac{3}{8}$ )	33.5	33.9	42.8	0.6	49 500	91 800	2 500
32.000	38.100( $1\frac{1}{2}$ )	37	37.1	47.3	0.6	54 200	97 700	2 000
32.000	41.275( $1\frac{5}{8}$ )	40.2	40.2	50.5	0.6	56 600	105 000	1 900
32.000	44.450( $1\frac{3}{4}$ )	43.3	43.4	53.7	0.6	58 900	114 000	1 800
32.000	47.625( $1\frac{7}{8}$ )	43.3	45	56.2	1	61 100	121 000	1 700
32.000	50.800(2)	48	49	59.2	1	63 100	130 000	1 600
44.700	57.150( $2\frac{1}{4}$ )	52.5	55	69.2	1.5	87 500	161 000	1 400
								LRBZ 283628

## MACHINED TYPE NEEDLE ROLLER BEARINGS


With Seal, With Inner Ring, Inch Series

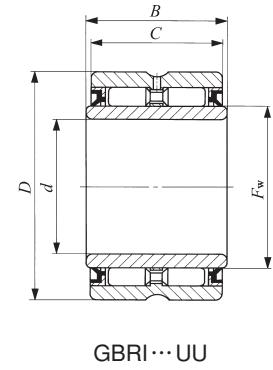

GBRI...UU

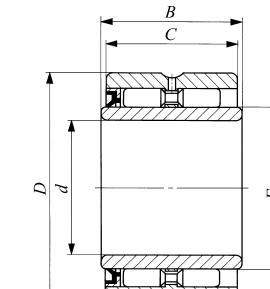

GBRI...U

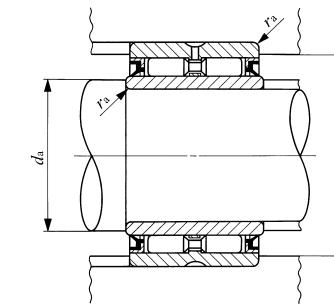

Shaft dia. 50.800 – 95.250mm

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
50.800 (2)	GBRI 325228 UU	GBRI 325228 U	950	50.800(2)	82.550(3 1/4)	44.450(1 3/4)
57.150 (2 1/4)	GBRI 365628 UU	GBRI 365628 U	1 050	57.150(2 1/4)	88.900(3 1/2)	44.450(1 3/4)
63.500 (2 1/2)	GBRI 406028 UU	GBRI 406028 U	1 140	63.500(2 1/2)	95.250(3 1/4)	44.450(1 3/4)
69.850 (2 3/4)	GBRI 446828 UU	GBRI 446828 U	1 490	69.850(2 3/4)	107.950(4 1/4)	44.450(1 3/4)
76.200 (3)	GBRI 487232 UU	GBRI 487232 U	1 880	76.200(3)	114.300(4 1/2)	50.800(2)
82.550 (3 1/4)	GBRI 527632 UU	GBRI 527632 U	2 010	82.550(3 1/4)	120.650(4 3/4)	50.800(2)
88.900 (3 1/2)	GBRI 568032 UU	GBRI 568032 U	2 130	88.900(3 1/2)	127.000(5)	50.800(2)
95.250 (3 3/4)	GBRI 608432 UU	GBRI 608432 U	2 260	95.250(3 3/4)	133.350(5 1/4)	50.800(2)

Note<sup>(1)</sup> Maximum permissible corner radius of the shaft or housing.

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication.

Remarks1. The outer ring has an oil groove and an oil hole.

2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

B	F <sub>w</sub>	Standard mounting dimensions mm			Basic dynamic load rating <sup>(1)</sup> C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		d <sub>a</sub> Min.	d <sub>a</sub> Max.	D <sub>a</sub> Max.					
44.700	63.500(2 1/2)	58	61	75.7	1.5	93 300	179 000	1 300	LRBZ 324028
44.700	69.850(2 3/4)	65	67	82	1.5	97 200	197 000	1 100	LRBZ 364428
44.700	76.200(3)	71	73	88	1.5	101 000	215 000	1 100	LRBZ 404828
44.700	82.550(3 1/4)	77	79	99.9	1.5	127 000	231 000	950	LRBZ 445228
51.050	88.900(3 1/2)	83.5	86	106.3	1.5	170 000	347 000	900	LRBZ 485632
51.050	95.250(3 3/4)	91	93	112.6	1.5	175 000	371 000	850	LRBZ 526032
51.050	101.600(4)	97	99	119	1.5	182 000	395 000	800	LRBZ 566432
51.050	107.950(4 1/4)	103	105	125.3	1.5	186 000	419 000	750	LRBZ 606832

# NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE





- Needle Roller Bearings with Separable Cage - Without Inner Ring
- Needle Roller Bearings with Separable Cage - With Inner Ring



## Structure and Features

In IKO Needle Roller Bearings with Separable Cage, the inner ring, outer ring and IKO Needle Roller Cage are combined, and they can be separated easily. This type has a simple structure with high accuracy. In addition, the radial clearance can be freely chosen by selecting and combining these component parts. As Needle Roller Cages are used, these bearings have excellent rotational performance. These bearings are most suitable for mass-production high accuracy products such as machine tools, textile machinery, and printing machines.

Structures of Needle Roller Bearings with Separable Cage

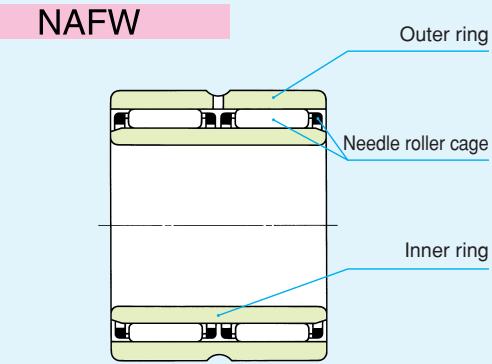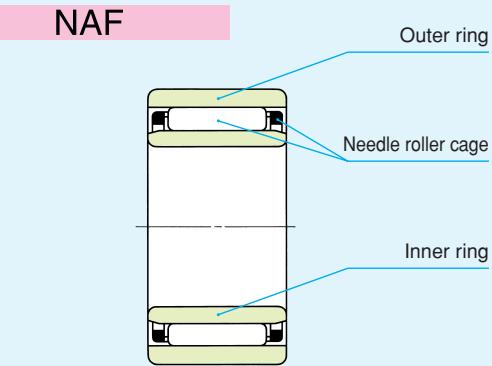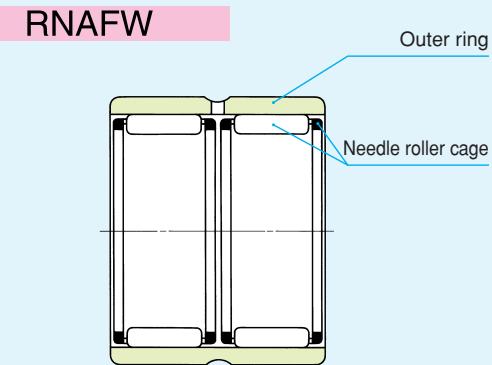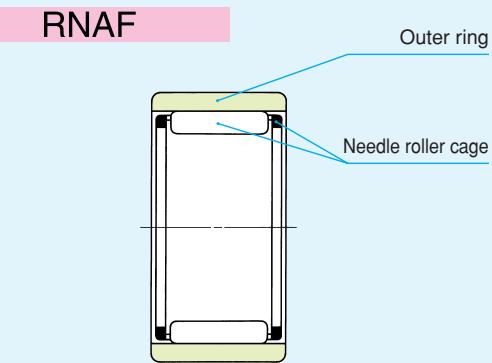

## Types

Needle Roller Bearings with Separable Cage are available in the types shown in Table 1.

**Table 1 Type of bearing**

Type	Single-row		Double-row	
	Without inner ring	With inner ring	Without inner ring	With inner ring
Model code	RNAF	NAF	RNAFW	NAFW

### Needle Roller Bearings with Separable Cage - Without Inner Ring

The single-row as well as the double-row types are available with the same sectional height, and either of them can be selected according to load conditions. As shown in the section, "Design of shaft and housing" on page 47, any desired radial internal clearance can be selected by combining a shaft which is heat-treated and finished by grinding.

### Needle Roller Bearings with Separable Cage - With Inner Ring


These bearings are made to the CN clearance shown in Table 19 on page 40. When especially high accuracy is required, it is possible to supply semi-finished inner rings which have a finishing allowance on their outside diameter so that they can be ground after being press-fitted to shafts.

## Identification Number


The identification number of Needle Roller Bearings with Separable Cage consists of a model code, dimensions, any supplemental codes and a classification symbol. The arrangement examples are as follows.

### Examples of identification number

#### Example 1

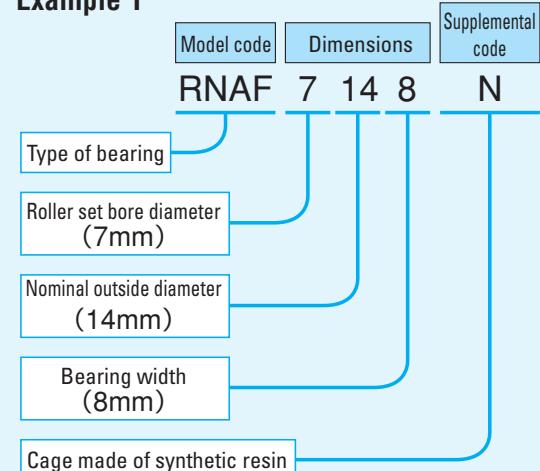

#### Example 2

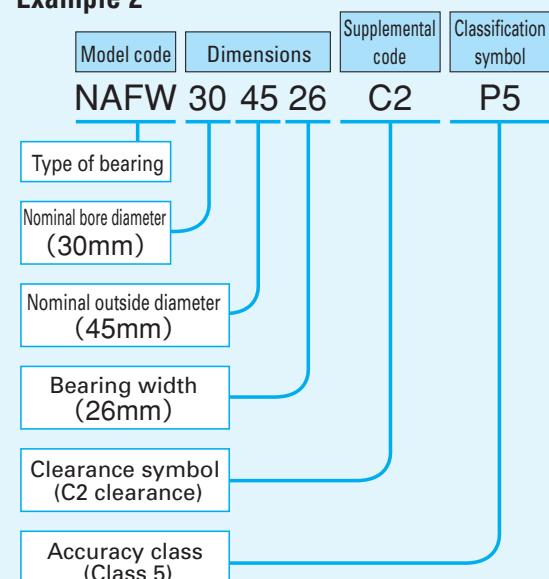

## Accuracy

Needle Roller Bearings with Separable Cage are manufactured to the accuracy based on JIS (See page 34.). Tolerances for the smallest single roller set bore diameter of bearings without inner ring are based on Table 14 on page 36.

## Clearance

Radial internal clearances of Needle Roller Bearings with Separable Cage are made to the CN clearance shown in Table 18 on page 40.

## Fit

Recommended fits for Needle Roller Bearings with Separable Cage are shown in Tables 21 to 23 on pages 44 and 45.

## Lubrication

Needle Roller Bearings with Separable Cage are not provided with prepacked grease. Perform proper lubrication for use. Using them without lubrication will increase the wear of the rolling contact surfaces and shorten their lives.

## Oil Hole

The double-row type outer rings have both an oil hole and an oil groove, but the single-row type outer rings do not. When outer rings with an oil hole are required, attach "-OH" before the clearance symbol in the identification number, and when outer rings with both an oil hole and an oil groove are required, attach "-OG" to the same position.

Example: NAF 203517 - OH C2 P6

When outer rings with multiple oil holes or inner rings with oil hole(s) are required, please contact IKO.

## Operating temperature range

For synthetic resin cages, "N" is added at the end of the identification number. The operating temperature range for Needle Roller Bearings with Separable Cage is  $-20 \sim +120^{\circ}\text{C}$ . However, the maximum allowable temperature for synthetic resin cages is  $+110^{\circ}\text{C}$ , and when they are continuously operated, it is  $+100^{\circ}\text{C}$ .

## Mounting

Mounting examples of Needle Roller Bearings with Separable Cage are shown in Fig.1.

When mounting Needle Roller Bearings with Separable Cage, it is necessary to locate the needle cage axially. The needle cage is guided by shoulders of the shaft and housing or by side plates, and their guide surfaces must be heat-treated and finished by grinding at right angles to the shaft central axis.

Dimensions related to mounting are shown in the table of dimensions.


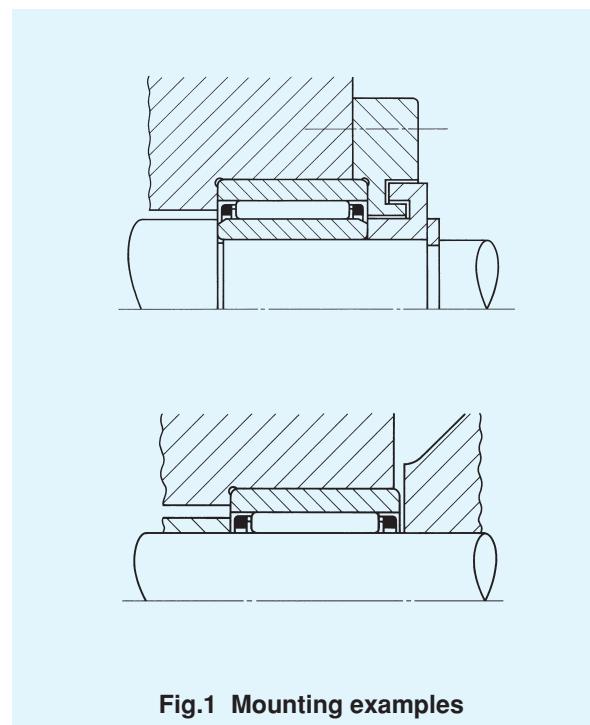


Fig.1 Mounting examples

## NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

Without Inner Ring

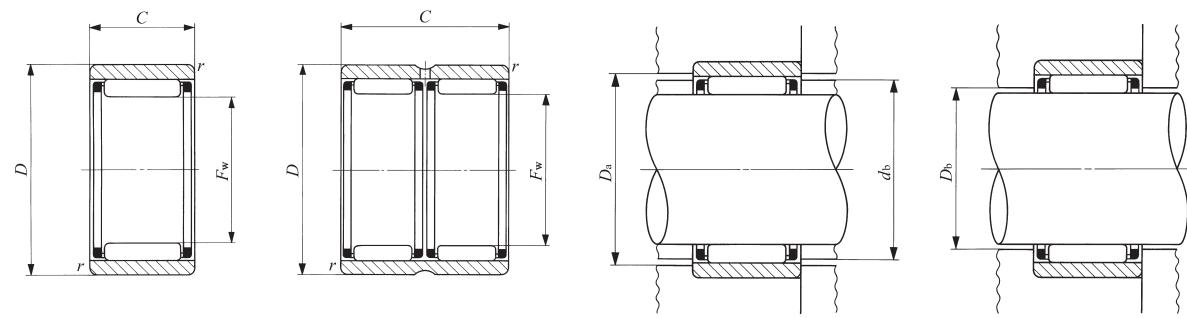

NAF

Shaft dia. 5 – 18mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N
			<i>F</i> <sub>w</sub>	<i>D</i>	<i>C</i>	<i>r</i> <sub>s min</sub> <sup>(1)</sup>	<i>d</i> <sub>b</sub>	<i>D</i> <sub>a</sub> Max.	<i>D</i> <sub>b</sub>		
5	RNAF 5108N	2.8	5	10	8	0.2	6.7	8.4	5.4	2 420	1 950
6	RNAF 6138N	5.5	6	13	8	0.3	8.4	11	6.4	2 700	2 320
7	RNAF 7148N	6.1	7	14	8	0.3	9.4	12	7.4	2 960	2 690
8	RNAF 81510 RNAFW 81620	8.2 20.5	8 8	15 16	10 20	0.3 0.3	10.4 10.8	13 14	8.4 8.4	3 630 6 220	3 600 7 200
10	RNAF 101710 RNAF 102012	9.6 18.7	10 10	17 20	10 12	0.3 0.3	12.4 13.5	15 18	10.4 10.4	4 160 5 940	4 550 6 000
12	RNAF 122212	19.5	12	22	12	0.3	15.5	20	12.4	9 030	8 460
14	RNAF 142213 RNAFW 142220 RNAF 142612	18.7 28.5 29	14 14 14	22 22 26	13 20 12	0.3 0.3 0.3	17.6 17.6 19.4	20 20 24	14.6 14.6 14.6	7 860 10 800 9 790	9 410 14 200 9 680
15	RNAF 152313 RNAFW 152320	19.7 30.5	15 15	23 23	13 20	0.3 0.3	18.6 18.6	21 21	15.6 15.6	8 250 11 400	10 200 15 400
16	RNAF 162413 RNAFW 162420 RNAF 162812	21 32 31.5	16 16 16	24 24 28	13 20 12	0.3 0.3 0.3	19.6 19.6 21.4	22 22 26	16.6 16.6 16.6	8 620 11 900 10 500	11 000 16 700 10 900
17	RNAF 172513 RNAFW 172520	22 33.5	17 17	25 25	13 20	0.3 0.3	20.6 20.6	23 23	17.6 17.6	8 980 12 400	11 800 17 900
18	RNAF 182613 RNAFW 182620 RNAF 183012 RNAFW 183024	23 35 34.5 69.5	18 18 18 18	26 26 30 30	13 20 12 24	0.3 0.3 0.3 0.3	21.6 21.6 23.4 23.4	24 24 28 28	18.6 18.6 18.6 18.6	9 330 12 900 11 800 20 200	12 700 19 100 13 100 26 200

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 50% of this value is allowable.

Remarks 1. The character "N" at the end of the identification number indicates that a synthetic resin cage is incorporated.

2. RNAF has no oil hole. RNAFW is provided with an oil groove and an oil hole on the outer ring.


3. No grease is prepacked. Perform proper lubrication.

Allowable  
rotational  
speed<sup>(2)</sup>  
rpm

85 000  
75 000  
65 000  
60 000  
60 000  
50 000  
50 000  
40 000  
35 000  
35 000  
35 000  
35 000  
35 000  
30 000  
30 000  
30 000  
30 000  
30 000

## NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

Without Inner Ring

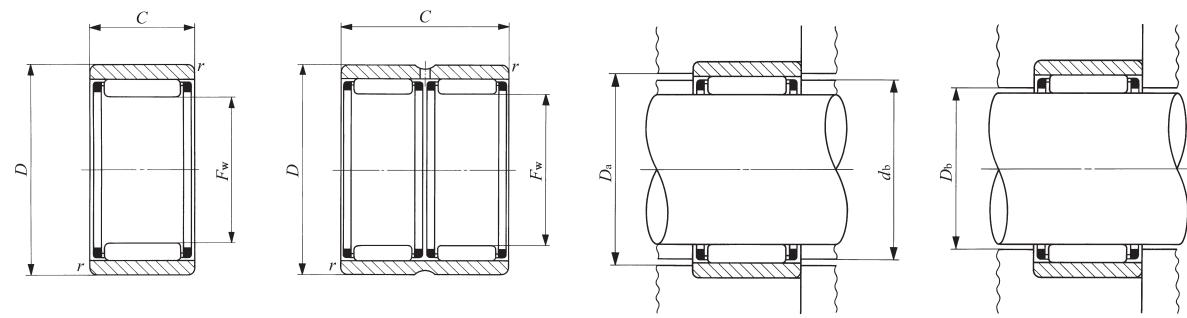

NAF

Shaft dia. 20 – 40mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N
			<i>F</i> <sub>w</sub>	<i>D</i>	<i>C</i>	<i>r</i> <sub>s min</sub> <sup>(1)</sup>	<i>d</i> <sub>b</sub> Max.	<i>D</i> <sub>a</sub>	<i>D</i> <sub>b</sub>		
20	RNAF 202813	25	20	28	13	0.3	23.6	26	20.6	9 590	13 500
	RNAFW 202826	49.5	20	28	26	0.3	23.6	26	20.6	16 400	27 100
	RNAF 203212	37.5	20	32	12	0.3	25.4	30	20.6	12 400	14 300
	RNAFW 203224	75	20	32	24	0.3	25.4	30	20.6	21 200	28 600
22	RNAF 223013	27	22	30	13	0.3	25.6	28	22.6	10 200	15 200
	RNAFW 223026	53.5	22	30	26	0.3	25.6	28	22.6	17 500	30 300
	RNAF 223516	58.5	22	35	16	0.3	27.8	33	22.6	17 600	20 900
	RNAFW 223532	117	22	35	32	0.3	27.8	33	22.6	30 200	41 800
25	RNAF 253517	51	25	35	17	0.3	29.5	33	25.6	17 300	26 600
	RNAFW 223526	78	25	35	26	0.3	29.5	33	25.6	22 400	37 200
	RNAF 253716	57	25	37	16	0.3	30.4	35	25.6	19 400	24 500
	RNAFW 253732	114	25	37	32	0.3	30.4	35	25.6	33 200	49 000
28	RNAF 284016	62.5	28	40	16	0.3	33.4	38	28.6	20 100	26 500
	RNAFW 284032	125	28	40	32	0.3	33.4	38	28.6	34 400	53 000
30	RNAF 304017	59	30	40	17	0.3	34.5	38	30.6	18 700	31 100
	RNAFW 304026	90.5	30	40	26	0.3	34.5	38	30.6	24 200	43 400
	RNAF 304216	66	30	42	16	0.3	35.4	40	30.6	20 800	28 400
	RNAFW 304232	132	30	42	32	0.3	35.4	40	30.6	35 700	56 800
35	RNAF 354517	67.5	35	45	17	0.3	39.5	43	35.6	20 500	36 900
	RNAFW 354526	103	35	45	26	0.3	39.5	43	35.6	26 600	51 500
	RNAF 354716	75.5	35	47	16	0.3	40.4	45	35.6	23 100	33 900
	RNAFW 354732	151	35	47	32	0.3	40.4	45	35.6	39 500	67 800
40	RNAF 405017	76	40	50	17	0.3	43.5	48	40.8	22 200	42 700
	RNAFW 405034	152	40	50	34	0.3	43.5	48	40.8	38 000	85 400
	RNAF 405520	140	40	55	20	0.3	45.2	53	40.8	31 400	48 000
	RNAFW 405540	280	40	55	40	0.3	45.2	53	40.8	53 900	96 000

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 50% of this value is allowable.


Remarks 1. RNAF has no oil hole. RNAFW is provided with an oil groove and an oil hole on the outer ring.

2. No grease is prepacked. Perform proper lubrication.

Allowable  
rotational  
speed<sup>(2)</sup>  
rpm25 000  
25 000  
25 000  
25 00025 000  
25 000  
25 000  
25 00020 000  
20 000  
20 000  
20 00018 000  
18 00017 000  
17 000  
17 000  
17 00014 000  
14 000  
14 000  
14 00012 000  
12 000  
12 000  
12 000

## NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

Without Inner Ring

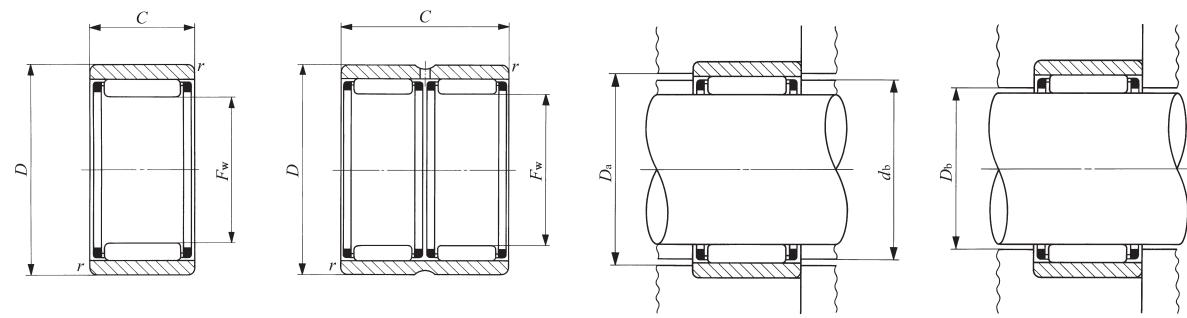

NAF

Shaft dia. 45 – 100mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N
			<i>F</i> <sub>w</sub>	<i>D</i>	<i>C</i>	<i>r</i> <sub>s min</sub> <sup>(1)</sup>	<i>d</i> <sub>b</sub> Max.	<i>D</i> <sub>a</sub>	<i>D</i> <sub>b</sub>		
45	<b>RNAF 455517</b>	83.5	45	55	17	0.3	48.5	53	45.8	23 300	47 100
	<b>RNAFW 455534</b>	167	45	55	34	0.3	48.5	53	45.8	39 900	94 200
	<b>RNAF 456220</b>	184	45	62	20	0.3	50.9	60	45.8	33 200	53 300
	<b>RNAFW 456240</b>	370	45	62	40	0.3	50.9	60	45.8	56 900	107 000
50	<b>RNAF 506220</b>	138	50	62	20	0.3	54.2	60	50.8	27 100	59 300
	<b>RNAFW 506240</b>	275	50	62	40	0.3	54.2	60	50.8	46 400	119 000
	<b>RNAF 506520</b>	170	50	65	20	0.3	55.2	63	50.8	35 900	61 100
	<b>RNAFW 506540</b>	340	50	65	40	0.6	55.2	61	50.8	61 500	122 000
55	<b>RNAF 556820</b>	167	55	68	20	0.3	59.5	66	55.8	28 600	66 000
	<b>RNAFW 556840</b>	335	55	68	40	0.3	59.5	66	55.8	49 000	132 000
	<b>RNAF 557220</b>	220	55	72	20	1	60.9	67	55.8	37 400	66 400
	<b>RNAFW 557240</b>	440	55	72	40	1	60.9	67	55.8	64 100	133 000
60	<b>RNAF 607820</b>	255	60	78	20	1	66.3	73	60.8	38 900	71 700
	<b>RNAFW 607840</b>	510	60	78	40	1	66.3	73	60.8	66 700	143 000
65	<b>RNAF 658530</b>	470	65	85	30	1.5	72	77	66	59 300	127 000
	<b>RNAFW 658560</b>	945	65	85	60	1.5	72	77	66	102 000	255 000
70	<b>RNAF 709030</b>	500	70	90	30	1.5	77	82	71	61 200	136 000
	<b>RNAFW 709060</b>	1 000	70	90	60	1.5	77	82	71	105 000	272 000
75	<b>RNAF 759530</b>	530	75	95	30	1.5	82	87	76	63 100	144 000
	<b>RNAFW 759560</b>	1 060	75	95	60	1.5	82	87	76	108 000	289 000
80	<b>RNAF 8010030</b>	560	80	100	30	1.5	87	92	81	65 000	153 000
	<b>RNAFW 8010060</b>	1 120	80	100	60	1.5	87	92	81	111 000	306 000
85	<b>RNAF 8510530</b>	590	85	105	30	1.5	92	97	86	66 600	161 000
90	<b>RNAF 9011030</b>	625	90	110	30	1.5	97	102	91	69 600	174 000
95	<b>RNAF 9511530</b>	655	95	115	30	1.5	102	107	96	70 900	182 000
100	<b>RNAF 10012030</b>	685	100	120	30	1.5	107	112	101	72 500	191 000

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 50% of this value is allowable.


Remarks1. RNAF has no oil hole. RNAFW is provided with an oil groove and an oil hole on the outer ring.

2. No grease is prepacked. Perform proper lubrication.

Allowable  
rotational  
speed<sup>(2)</sup>  
rpm11 000  
11 000  
11 000  
11 000  
10 000  
10 000  
10 000  
10 000  
9 000  
9 000  
9 000  
9 000  
8 500  
8 500  
7 500  
7 500  
7 000  
7 000  
6 500  
6 500  
6 000  
6 000  
6 000  
5 500  
5 500  
4 500

## NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

With Inner Ring

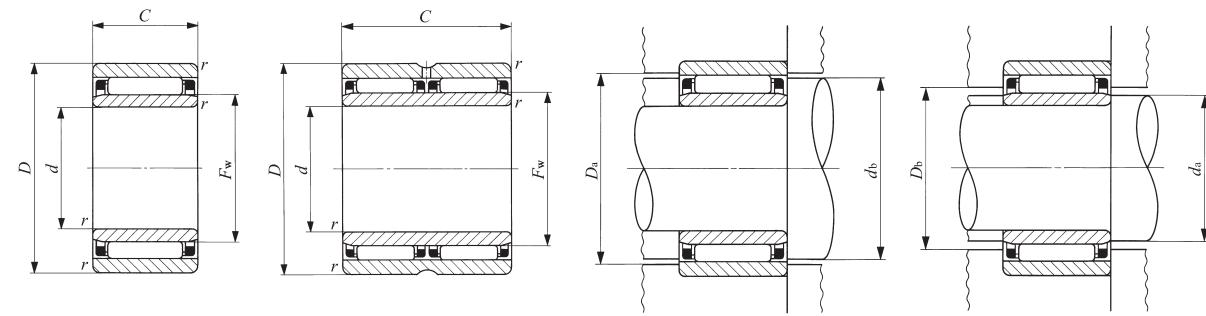

NAF

Shaft dia. 6 – 25mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			d	D	C	$r_s$ min <sup>(1)</sup>	$F_w$	$d_b$ Max.	$D_a$ Max.	Min.	$d_a$ Max.	$D_b$
6	NAF 61710	13.5	6	17	10	0.3	10	12.4	15	8	9.7	10.4
7	NAF 72012	22.5	7	20	12	0.3	10	13.5	18	9	9.7	10.4
9	NAF 92212	24	9	22	12	0.3	12	15.5	20	11	11.5	12.4
10	NAF 102213	26	10	22	13	0.3	14	17.6	20	12	13	14.6
	NAFW 102220	40	10	22	20	0.3	14	17.6	20	12	13	14.6
	NAF 102612	36	10	26	12	0.3	14	19.4	24	12	13	14.6
12	NAF 122413	29.5	12	24	13	0.3	16	19.6	22	14	15	16.6
	NAFW 122420	45.5	12	24	20	0.3	16	19.6	22	14	15	16.6
	NAF 122812	40	12	28	12	0.3	16	21.4	26	14	15	16.6
15	NAF 152813	38.5	15	28	13	0.3	20	23.6	26	17	19	20.6
	NAFW 152826	77.5	15	28	26	0.3	20	23.6	26	17	19	20.6
	NAF 153212	50.5	15	32	12	0.3	20	25.4	30	17	19	20.6
17	NAF 173013	42.5	17	30	13	0.3	22	25.6	28	19	21	22.6
	NAFW 173026	84.5	17	30	26	0.3	22	25.6	28	19	21	22.6
	NAF 173516	77.5	17	35	16	0.3	22	27.8	33	19	21	22.6
	NAFW 173532	155	17	35	32	0.3	22	27.8	33	19	21	22.6
20	NAF 203517	74	20	35	17	0.3	25	29.5	33	22	24	25.6
	NAFW 203526	114	20	35	26	0.3	25	29.5	33	22	24	25.6
	NAF 203716	79	20	37	16	0.3	25	30.4	35	22	24	25.6
	NAFW 203732	158	20	37	32	0.3	25	30.4	35	22	24	25.6
25	NAF 254017	87.5	25	40	17	0.3	30	34.5	38	27	29	30.6
	NAFW 254026	135	25	40	26	0.3	30	34.5	38	27	29	30.6
	NAF 254216	94	25	42	16	0.3	30	35.4	40	27	29	30.6
	NAFW 254232	186	25	42	32	0.3	30	35.4	40	27	29	30.6

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 50% of this value is allowable.


Remarks1. RNAF has no oil hole. RNAFW is provided with an oil groove and an oil hole on the outer ring.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
4 160	4 550	50 000	LRT 61010
5 940	6 000	50 000	LRT 71012-1
9 030	8 460	40 000	LRT 91212
7 860	9 410	35 000	LRT 101413
10 800	14 200	35 000	LRT 101420
9 790	9 680	35 000	LRT 101412
8 620	11 000	30 000	LRT 121613
11 900	16 700	30 000	LRT 121620
10 500	10 900	30 000	LRT 121612
9 590	13 500	25 000	LRT 152013
16 400	27 100	25 000	LRT 152026
12 400	14 300	25 000	LRT 152012
10 200	15 200	25 000	LRT 172213
17 500	30 300	25 000	LRT 172226
17 600	20 900	25 000	LRT 172216
30 200	41 800	25 000	LRT 172232
17 300	26 600	20 000	LRT 202517
22 400	37 200	20 000	LRT 202526
19 400	24 500	20 000	LRT 202516
33 200	49 000	20 000	LRT 202532
18 700	31 100	17 000	LRT 253017
24 200	43 400	17 000	LRT 253026
20 800	28 400	17 000	LRT 253016
35 700	56 800	17 000	LRT 253032

## NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

With Inner Ring

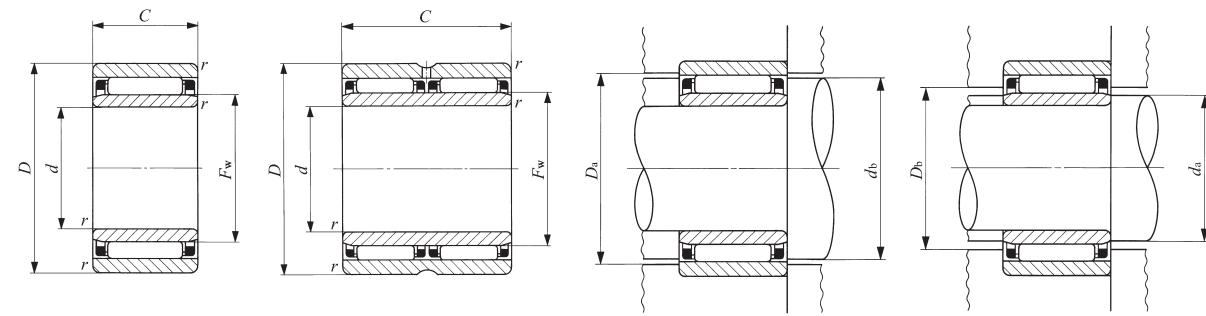

NAF

Shaft dia. 30 – 65mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			d	D	C	$r_s$ min <sup>(1)</sup>	$F_w$	$d_b$ Max.	$D_a$ Max.	$d_a$ Min.	$d_a$ Max.	$D_b$
30	NAF 304517	101	30	45	17	0.3	35	39.5	43	32	34	35.6
	NAFW 304526	155	30	45	26	0.3	35	39.5	43	32	34	35.6
	NAF 304716	107	30	47	16	0.3	35	40.4	45	32	34	35.6
	NAFW 304732	215	30	47	32	0.3	35	40.4	45	32	34	35.6
35	NAF 355017	115	35	50	17	0.3	40	43.5	48	37	39	40.8
	NAFW 355034	230	35	50	34	0.3	40	43.5	48	37	39	40.8
	NAF 355520	186	35	55	20	0.3	40	45.2	53	37	39	40.8
	NAFW 355540	375	35	55	40	0.3	40	45.2	53	37	39	40.8
40	NAF 405517	128	40	55	17	0.3	45	48.5	53	42	44	45.8
	NAFW 405534	255	40	55	34	0.3	45	48.5	53	42	44	45.8
	NAF 406220	235	40	62	20	0.3	45	50.9	60	42	44	45.8
	NAFW 406240	475	40	62	40	0.3	45	50.9	60	42	44	45.8
45	NAF 456220	196	45	62	20	0.3	50	54.2	60	47	49	50.8
	NAFW 456240	390	45	62	40	0.3	50	54.2	60	47	49	50.8
	NAF 457220	340	45	72	20	1	55	60.9	67	50	54	55.8
	NAFW 457240	685	45	72	40	1	55	60.9	67	50	54	55.8
50	NAF 506820	230	50	68	20	0.3	55	59.5	66	52	54	55.8
	NAFW 506840	465	50	68	40	0.3	55	59.5	66	52	54	55.8
	NAF 507820	390	50	78	20	1	60	66.3	73	55	59	60.8
	NAFW 507840	775	50	78	40	1	60	66.3	73	55	59	60.8
55	NAF 558530	690	55	85	30	1.5	65	72	77	63	63.5	66
	NAFW 558560	1 380	55	85	60	1.5	65	72	77	63	63.5	66
60	NAF 609030	740	60	90	30	1.5	70	77	82	68	68.5	71
	NAFW 609060	1 480	60	90	60	1.5	70	77	82	68	68.5	71
65	NAF 659530	790	65	95	30	1.5	75	82	87	73	73.5	76
	NAFW 659560	1 580	65	95	60	1.5	75	82	87	73	73.5	76

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$ <sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 50% of this value is allowable.


Remarks1. RNAF has no oil hole. RNAFW is provided with an oil groove and an oil hole on the outer ring.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
20 500	36 900	14 000	LRT 303517
	51 500	14 000	LRT 303526
	33 900	14 000	LRT 303516
	67 800	14 000	LRT 303532
22 200	42 700	12 000	LRT 354017
	85 400	12 000	LRT 354034
	48 000	12 000	LRT 354020
	96 000	12 000	LRT 354040
23 300	47 100	11 000	LRT 404517
	94 200	11 000	LRT 404534
	53 300	11 000	LRT 404520
	107 000	11 000	LRT 404540
27 100	59 300	10 000	LRT 455020
	119 000	10 000	LRT 455040
	66 400	9 000	LRT 455520
	133 000	9 000	LRT 455540
28 600	66 000	9 000	LRT 505520
	132 000	9 000	LRT 505540
	71 700	8 500	LRT 506020
	143 000	8 500	LRT 506040
59 300	127 000	7 500	LRT 556530
	255 000	7 500	LRT 556560
61 200	136 000	7 000	LRT 607030
	272 000	7 000	LRT 607060
63 100	144 000	6 500	LRT 657530
	289 000	6 500	LRT 657560

## NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE

With Inner Ring

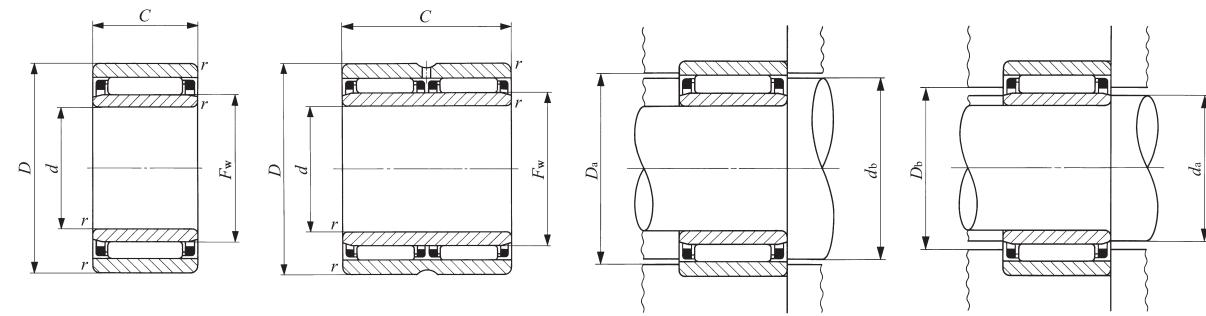

NAF

Shaft dia. 70 – 90mm

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			d	D	C	$r_s$ min <sup>(1)</sup>	$F_w$	$d_b$	$D_a$ Max.	Min.	$d_a$ Max.	$D_b$
70	NAF 7010030	835	70	100	30	1.5	80	87	92	78	78.5	81
	NAFW 7010060	1 680	70	100	60	1.5	80	87	92	78	78.5	81
75	NAF 7510530	885	75	105	30	1.5	85	92	97	83	83.5	86
80	NAF 8011030	935	80	110	30	1.5	90	97	102	88	88.5	91
85	NAF 8511530	985	85	115	30	1.5	95	102	107	93	93.5	96
90	NAF 9012030	1 040	90	120	30	1.5	100	107	112	98	98.5	101

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 50% of this value is allowable.

Remarks1. RNAF has no oil hole. RNAFW is provided with an oil groove and an oil hole on the outer ring.

2. No grease is prepacked. Perform proper lubrication.

Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring
65 000	153 000	6 000	LRT 708030-1
111 000	306 000	6 000	LRT 708060
66 600	161 000	6 000	LRT 758530-1
69 600	174 000	5 500	LRT 809030-1
70 900	182 000	5 500	LRT 859530
72 500	191 000	4 500	LRT 9010030

# ROLLER BEARINGS

- Caged Roller Bearings
- Full Complement Roller Bearings
- Roller Bearings for Sheaves




## Structure and Features


IKO Roller Bearings in which rollers are incorporated in two rows are non-separable heavy-duty bearings. They can withstand not only radial loads but axial loads as well, which are supported at the contacts between the shoulders of inner and outer rings and the end faces of rollers. Therefore, they are most suitable for use at the fixing side of a shaft. Like needle roller bearings, they are also compact. Roller bearings include the caged type, full complement type and the type for sheaves, and any bearings suitable for the operating conditions can be selected. In particular, these bearings are used for heavy-duty machines such as construction machinery, and industrial machinery.

### Structures of Roller Bearings


NAU49

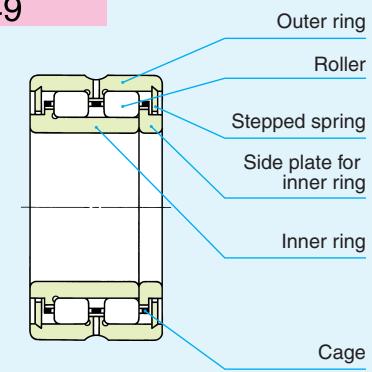


NAG49

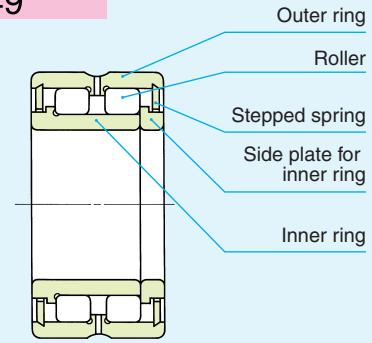

NAG49···UU

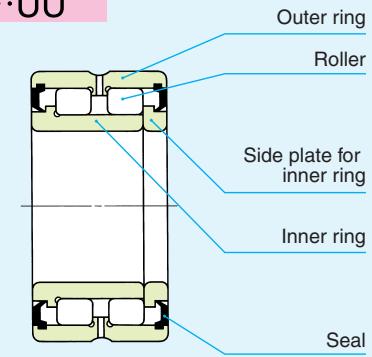

NAS50···ZZNR

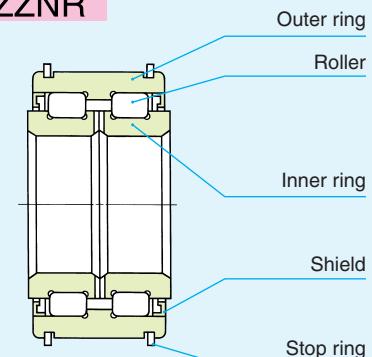

NAG  
NAU  
TRU  
NAS

## Types

The types of Roller Bearings shown in Table 1 are available.

**Table 1 Type of bearing**

Series \ Type	Caged type	Full complement type	For sheaves
Standard	NAU49 TRU	NAG49	—
With seal	NAU49…UU TRU…UU	NAG49…UU	NAS50…UUNR
With shield	—	—	NAS50…ZZNR

### Caged Roller Bearings

These bearings are suitable for high-speed rotations and fluctuating loads. Also, as the axial distance between the double-row rollers is comparatively large, large moment loads can be supported.

Caged roller bearings with seal incorporate seals on both sides. Synthetic resin rubber seals are excellent in the prevention of dust penetration and grease leakage, providing an excellent sealing effect.

### Full Complement Roller Bearings

These bearings are suitable for low-speed rotations or oscillating motions and heavy loads. Similar to the caged type, the structure is advantageous for supporting moment loads.

The bearings with seal incorporate seals on both sides.

### Roller Bearings for Sheaves

These bearings are the double-row full complement type with a low sectional height designed for use in sheaves. There are two types; the sealed type and the shield type. They can withstand heavy radial loads and shock loads at comparatively low-speed rotations, and can also withstand axial loads.

They can easily be fixed axially to sheaves using the stop rings of the outer ring. As the width of the inner ring is designed to be larger than that of the outer ring, they require no spacer between sheaves. The structure is stable because the double-row rollers can withstand the moment loads caused by rope transition.


The surfaces of these bearings are treated to have high corrosion resistance.

## Identification Number


The identification number of Roller Bearings consists of a model code, dimensions, any supplemental codes and a classification symbol. The arrangement examples are shown below.

### Examples of identification number

#### Example 1

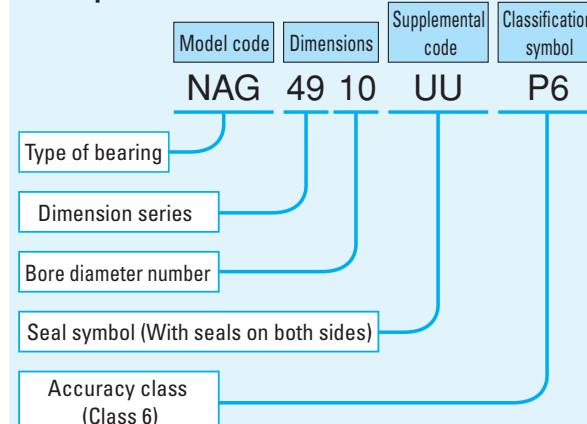

#### Example 2

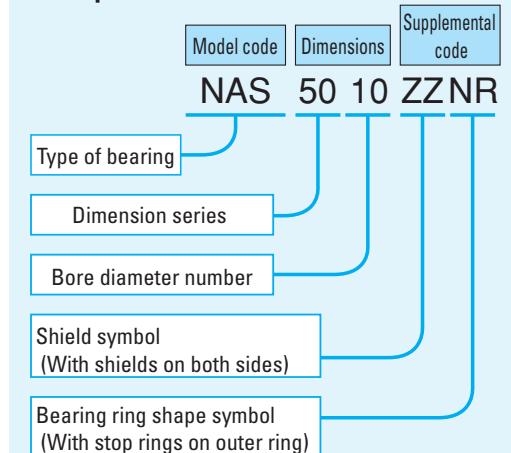

## Accuracy

Roller Bearings are manufactured in accordance with JIS (See page 34.). A side plate for inner ring is assembled on one side of caged or full complement roller bearings. The tolerance of bore diameter of the side plate is shown below. Tolerances of Roller Bearings for Sheaves represent the values before surface treatment. The tolerance of internal distance between cir-clips is shown below.

Tolerance of bore diameter of the side plate  $d$ : E7  
Tolerance of internal distance between cir-clips  $C_1$ :  $0 \sim +0.4\text{mm}$

## Clearance

Roller Bearings are manufactured to the CN clearance shown in Table 18 on page 40. However, Roller Bearings for Sheaves are manufactured so that proper operating clearances are obtained after being mounted with a specified fit.

## Fit

The recommended fits for Roller Bearings are shown in Tables 21 to 22 on pages 44 and 45. The recommended fits for Roller Bearings for Sheaves are shown in Table 2.

**Table 2 Recommended fits for Roller Bearings for Sheaves**

Tolerance class of shaft	Tolerance class of housing bore
g6	N7

**Table 3 Bearings with prepacked grease**

Type	Standard	With seals	With shields
Caged type	NAU , TRU	×	○
Full complement type	NAG	×	○
For sheaves	NAS	—	○

○ : With prepacked grease × : Without prepacked grease

**Table 4 Number of oil holes of the inner ring and outer ring**

Type	Nominal bore diameter $d$ mm	Number of oil holes of the outer ring			Number of oil holes of the inner ring
		Standard	With seals	With shields	
Caged type	NAU	$d \leq 17$	0	0	0
		$17 < d$	2	2	
	TRU		2	2	0
Full complement type	NAG	$d \leq 17$	0	0	0
		$17 < d$	2	2	
For sheaves	NAS	—	0	0	2

Remark The bearings with oil holes are also provided with an oil groove.

## Lubrication

Bearings with prepacked grease are shown in Table 3. For Caged Roller Bearings and Full Complement Roller Bearings, ALVANIA GREASE 2 (SHELL) is prepacked as the lubricating grease. For Roller Bearings for Sheaves, ALVANIA EP GREASE 2 (SHELL) is prepacked as the lubricating grease.

In the case of bearings without prepacked grease, perform proper lubrication for use. Operating without lubrication will increase the wear of the rolling contact surfaces and shorten their lives.

## Oil Hole

The number of oil holes of the inner and outer rings is shown in Table 4.

NAG  
NAU  
TRU  
NAS

## Axial Load Capacity

Axial load capacity is not determined from the basic dynamic load rating based on rolling fatigue, but is determined by the amount of heat generated by sliding contact between the ends of rollers and guide shoulders of the inner and outer rings. It is therefore limited by the load conditions, sliding speeds, lubrication methods, etc.

The axial load capacity of Roller Bearings is obtained from the following equation.

If the axial load increases in comparison with the radial load, it will start to interfere with the smooth rolling motion. The axial load should therefore be within 20% of the radial load.

$$C_A = f_v a f_A \quad \dots \dots \dots (1)$$

where,  $C_A$  : Axial load capacity N

$f_v$  : Speed correction factor

$f_v$  is obtained from Fig.2 by calculating the  $d_{mn}$  value.

$$d_{mn} = d_m \times n$$

$d_m$  : Mean value of bearing bore and outside diameters mm

$$\left( d_m \div \frac{d+D}{2} \right)$$

$n$  : Rotational speed rpm

When  $d_{mn} \leq 1000$ ,  $f_v = 1$ .

$a$  : Value determined by type of bearing  
(See Table 5.)

$f_A$  : Axial load capacity factor (See Fig.1.)

Table 5 Value by type of bearing

Type of bearing	$a$
NAS 50	1
NAG 49	0.78
NAU 49, TRU	0.7

## Calculation example

When a roller bearing for sheaves NAS 5016 ZZ NR is run at  $n = 250$  rpm under grease lubrication and subjected to an intermittent axial load, the axial load capacity is calculated as follows.

As the bearing bore diameter is 80 mm,  $f_A = 18000$  is obtained from the axial load capacity line of Fig. 1 (ii).

$$a = 1$$

$$d_m \div \frac{80+125}{2} = 102.5$$

$$d_{mn} = 102.5 \times 250 = 25600$$

From Fig. 2,  $f_v = 0.87$

Therefore, the axial load capacity  $C_A$  is obtained.

$$C_A = f_v a f_A = 0.87 \times 1 \times 18000 = 15700 \text{ N}$$

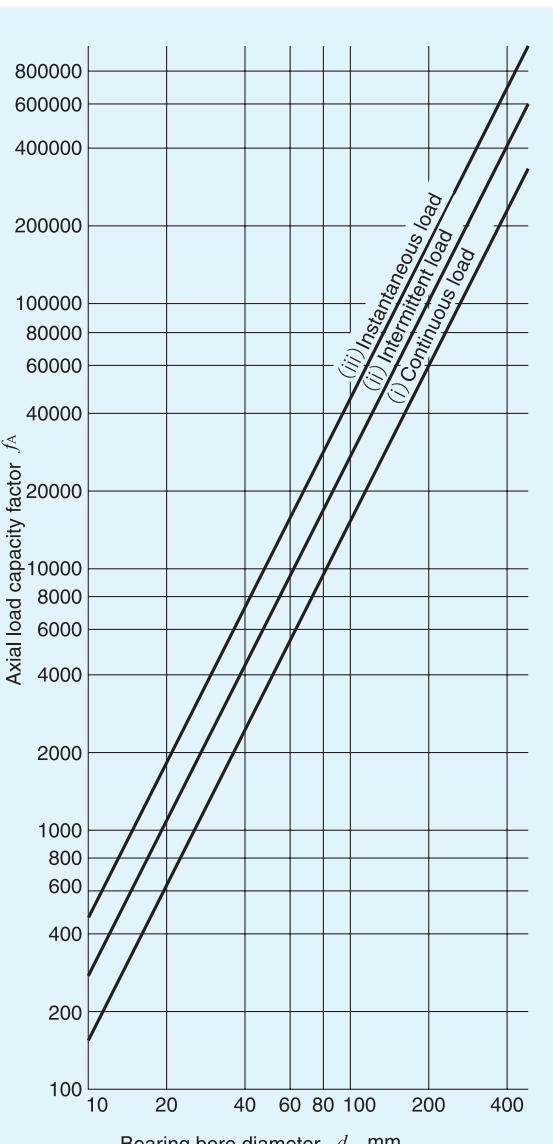


Fig. 1 Axial load capacity factor

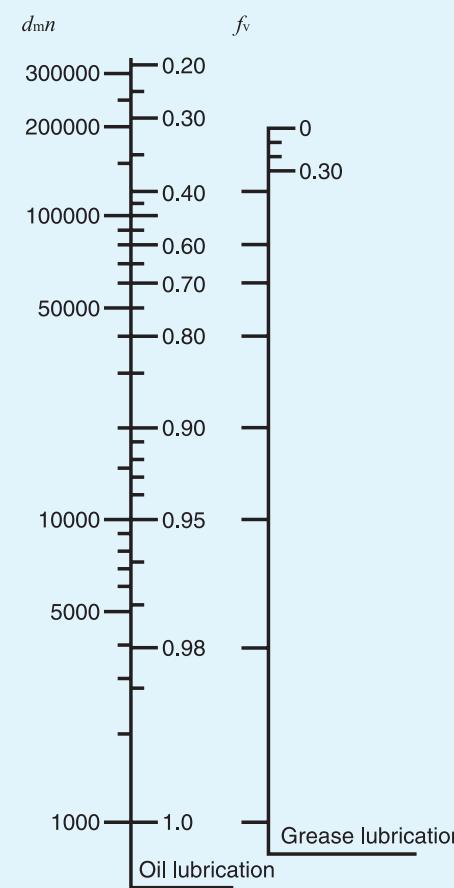


Fig. 2 Speed correction factor

## Mounting

Unlike needle roller bearings, Caged and Full Complement Roller Bearings are non-separable.

As shown in Fig. 3 (1), the inner ring should be press-fitted until it makes close contact with the shaft shoulder, and fixed axially with a nut. Dimensions of the shoulders of the shaft and housing should be based on  $J$  and  $E_W$  shown in the table of dimensions, respectively.

In the case of Roller Bearings for Sheaves, as shown in Fig. 3 (2), the outer ring should be fixed by stop rings after being press-fitted into the sheaves, and the inner ring should be fixed securely in the axial direction.


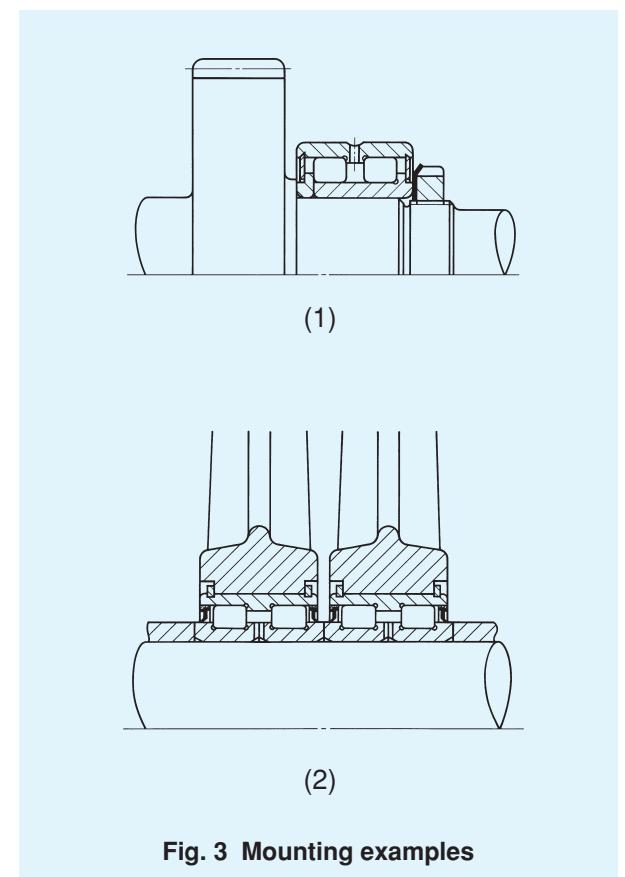


Fig. 3 Mounting examples


## ROLLER BEARINGS

Caged Roller Bearings


Full Complement Roller Bearings

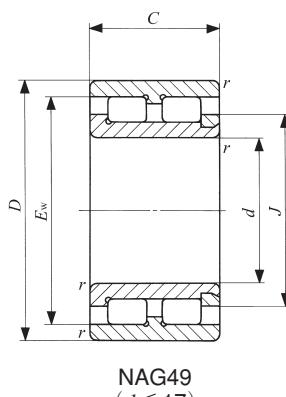


NAG49  
( $d \leq 17$ )

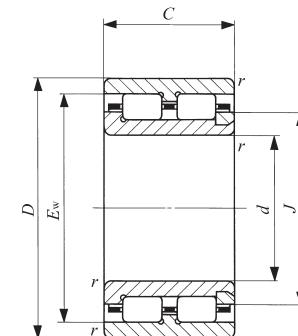

NAU49  
( $d \leq 17$ )

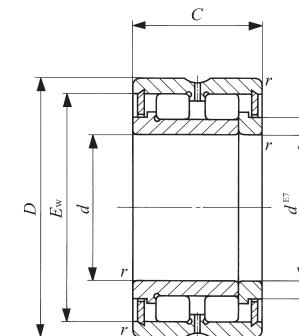

NAG49

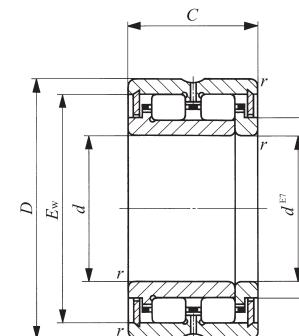

NAU49 TRU

Shaft dia. 10 – 35mm

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm					
	Full complement type	Caged type		<i>d</i>	<i>D</i>	<i>C</i>	<i>r<sub>s min</sub></i> <sup>(1)</sup>	<i>J</i>	<i>E<sub>w</sub></i>
10	<b>NAG 4900</b> —	<b>NAU 4900</b> —	25.5	10	22	13	0.3	15.5	18.5
			24.5	10	22	13	0.3	15.5	18.5
12	<b>NAG 4901</b> —	<b>NAU 4901</b> —	28.5	12	24	13	0.3	17	20
			27.5	12	24	13	0.3	17	20
15	<b>NAG 4902</b> — —	<b>NAU 4902</b> — —	38	15	28	13	0.3	21	24
			36.5	15	28	13	0.3	21	24
			80.5	15	33	20	0.3	19.5	27
17	<b>NAG 4903</b> — —	<b>NAU 4903</b> — —	41	17	30	13	0.3	22.5	25.5
			39.5	17	30	13	0.3	22.5	25.5
			100	17	34	25	0.3	21.5	29.5
20	<b>NAG 4904</b> — — —	<b>NAU 4904</b> — — —	76.5	20	37	17	0.3	24	31.5
			76	20	37	17	0.3	24	31.5
			96.5	20	38	20	0.3	25	32.5
			122	20	38	25	0.3	25	32.5
25	<b>NAG 4905</b> — —	<b>NAU 4905</b> — —	89.5	25	42	17	0.3	29.5	37
			89	25	42	17	0.3	29.5	37
			154	25	44	25	0.3	30.5	38
28	—	<b>TRU 284530</b>	173	28	45	30	0.3	31.5	39.5
30	<b>NAG 4906</b> — —	<b>NAU 4906</b> — —	103	30	47	17	0.3	34	41.5
			102	30	47	17	0.3	34	41.5
			197	30	48	30	0.3	35	42.5
32	—	<b>TRU 325230</b>	260	32	52	30	0.6	38	46
35	<b>NAG 4907</b> — —	<b>NAU 4907</b> — —	172	35	55	20	0.6	40	49
			168	35	55	20	0.6	40	49
			270	35	56	30	0.6	40	49

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*

<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The NAG and NAU series with a bore diameter *d* of 17 mm or less have no oil hole. In others, the outer ring has an oil groove and two oil holes.

2. No grease is prepakced. Perform proper lubrication.

Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C<sub>0</sub></i> N	Allowable rotational speed <sup>(2)</sup> rpm
9 650	10 800	17 000
6 580	6 470	30 000
10 300	12 000	15 000
6 950	7 120	25 000
11 800	15 200	12 000
7 950	9 020	20 000
10 400	10 400	20 000
12 300	16 500	11 000
8 240	9 670	19 000
18 000	21 600	18 000
15 600	18 900	9 500
10 700	11 300	16 000
12 100	13 400	16 000
18 700	23 600	16 000
17 500	23 200	7 500
11 900	13 900	13 000
21 000	28 900	13 000
28 700	43 800	12 000
19 400	27 600	6 500
13 000	16 200	12 000
29 400	46 600	11 000
29 800	44 200	10 000
28 700	43 800	5 500
19 500	26 300	10 000
32 200	49 800	10 000

## ROLLER BEARINGS

Caged Roller Bearings

Full Complement Roller Bearings



Shaft dia. 40 – 80mm


Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm					
	Full complement type	Caged type		d	D	C	<sup>(1)</sup> $r_s$ min	J	$E_w$
40	NAG 4908	—	225	40	62	22	0.6	46	56
	—	—	265	40	59	30	0.6	45	52.5
	—	NAU 4908	220	40	62	22	0.6	46	56
42	—	—	290	42	62	30	0.6	48	56.5
45	NAG 4909	—	265	45	68	22	0.6	51	61
	—	—	295	45	64	30	0.6	50.5	58.5
	—	NAU 4909	260	45	68	22	0.6	51	61
50	NAG 4910	—	270	50	72	22	0.6	55.5	65.5
	—	NAU 4910	265	50	72	22	0.6	55.5	65.5
	—	TRU 507745	710	50	77	45	1	58	69
55	NAG 4911	—	395	55	80	25	1	61.5	72.5
	—	NAU 4911	385	55	80	25	1	61.5	72.5
	—	TRU 558138	615	55	81	38	1	61.5	72.5
60	NAG 4912	—	425	60	85	25	1	67	77.5
	—	NAU 4912	415	60	85	25	1	67	77.5
	—	TRU 608945	880	60	89	45	1	69.5	81.5
65	NAG 4913	—	455	65	90	25	1	72	83
	—	NAU 4913	440	65	90	25	1	72	83
70	NAG 4914	—	725	70	100	30	1	79	91.5
	—	NAU 4914	705	70	100	30	1	79	91.5
75	NAG 4915	—	775	75	105	30	1	83.5	95.5
	—	NAU 4915	750	75	105	30	1	83.5	95.5
	—	TRU 7510845	1 240	75	108	45	1	85.5	98.5
80	NAG 4916	—	815	80	110	30	1	89.5	102
	—	NAU 4916	790	80	110	30	1	89.5	102

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$


<sup>(2)</sup> Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The outer ring has an oil groove and two oil holes.

2. No grease is prepakced. Perform proper lubrication.

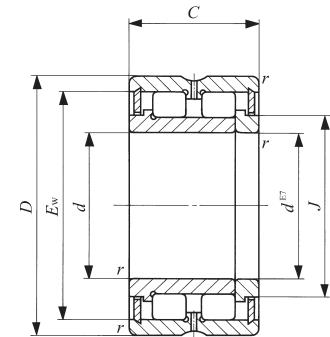

NAG49

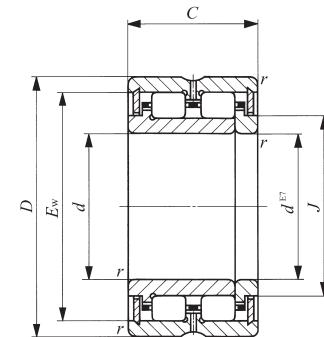

NAU49 TRU

## ROLLER BEARINGS

Caged Roller Bearings

Full Complement Roller Bearings



Shaft dia. 85 – 140mm


Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm					
	Full complement type	Caged type		d	D	C	<sup>(1)</sup> $r_s$ min	J	$E_w$
85	NAG 4917	—	1 190	85	120	35	1.5	96	110
	—	—	TRU 8511850	1 530	85	118	50	1	94.5 107.5
	—	NAU 4917	—	1 150	85	120	35	1.5	96 110
	—	—	TRU 8512045	1 500	85	120	45	1.5	96.5 110
90	NAG 4918	—	1 250	90	125	35	1.5	101	115.5
	—	NAU 4918	—	1 210	90	125	35	1.5	101 115.5
	—	—	TRU 9012550	1 740	90	125	50	1.5	101 114
95	NAG 4919	—	1 300	95	130	35	1.5	106	120.5
	—	NAU 4919	—	1 270	95	130	35	1.5	106 120.5
100	NAG 4920	—	1 850	100	140	40	1.5	114.5	129.5
	—	—	TRU 10013550	1 900	100	135	50	1.5	112 125.5
	—	NAU 4920	—	1 770	100	140	40	1.5	114.5 129.5
105	—	—	TRU 10515350	2 890	105	153	50	1.5	120 138
110	NAG 4922	—	2 010	110	150	40	1.5	123	138.5
	—	NAU 4922	—	1 930	110	150	40	1.5	123 138.5
120	NAG 4924	—	2 780	120	165	45	1.5	136	153.5
	—	NAU 4924	—	2 680	120	165	45	1.5	136 153.5
125	—	—	TRU 12517860	4 490	125	178	60	1.5	143.5 162
130	NAG 4926	—	3 750	130	180	50	2	147	165.5
	—	NAU 4926	—	3 610	130	180	50	2	147 165.5
135	—	—	TRU 13518860	4 790	135	188	60	1.5	154 172.5
140	NAG 4928	—	3 990	140	190	50	2	157.5	176
	—	NAU 4928	—	3 840	140	190	50	2	157.5 176

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$


(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The outer ring has an oil groove and two oil holes.

2. No grease is prepakced. Perform proper lubrication.

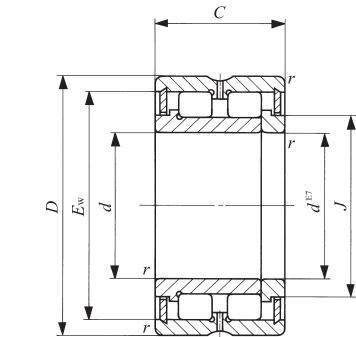

NAG49

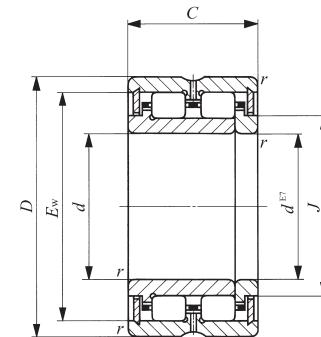

NAU49 TRU

## ROLLER BEARINGS

Caged Roller Bearings With Seal

Full Complement Roller Bearings With Seal



Shaft dia. 10 – 40mm


Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm				
	Full complement type	Caged type		d	D	C	$r_s$ min	J
10	NAG 4900UU	—	25.5	10	22	13	0.3	15.5
12	NAG 4901UU	—	28.5	12	24	13	0.3	17
15	NAG 4902UU	—	38	15	28	13	0.3	21
	—	TRU 153320UU	80.5	15	33	20	0.3	19.5
17	NAG 4903UU	—	41	17	30	13	0.3	22.5
	—	TRU 173425UU	100	17	34	25	0.3	21.5
20	NAG 4904UU	—	76.5	20	37	17	0.3	24
	NAU 4904UU	—	76	20	37	17	0.3	24
	—	TRU 203820UU	96.5	20	38	20	0.3	25
	—	TRU 203825UU	122	20	38	25	0.3	25
25	NAG 4905UU	—	89.5	25	42	17	0.3	29.5
	—	NAU 4905UU	89	25	42	17	0.3	29.5
	—	TRU 254425UU	154	25	44	25	0.3	30.5
28	—	—	173	28	45	30	0.3	31.5
30	NAG 4906UU	—	103	30	47	17	0.3	34
	—	NAU 4906UU	102	30	47	17	0.3	34
	—	TRU 304830UU	197	30	48	30	0.3	35
32	—	—	260	32	52	30	0.6	38
35	NAG 4907UU	—	172	35	55	20	0.6	40
	—	NAU 4907UU	168	35	55	20	0.6	40
	—	TRU 355630UU	270	35	56	30	0.6	40
40	NAG 4908UU	—	225	40	62	22	0.6	46
	—	NAU 4908UU	265	40	59	30	0.6	45
	—	TRU 405930UU	220	40	62	22	0.6	46

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$


(2) Allowable rotational speed applies to grease lubrication. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The NAG and NAU series with a bore diameter,  $d$ , of 17 mm or less have no oil hole. In others, the outer ring has an oil groove and two oil holes.


2. The bearings with seals are provided with prepacked grease.

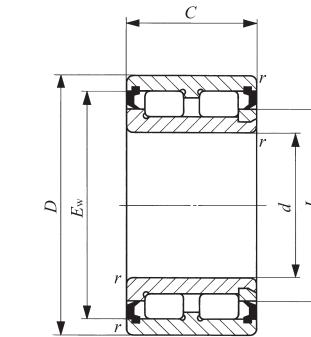

NAG49...UU  
( $d \leq 17$ )

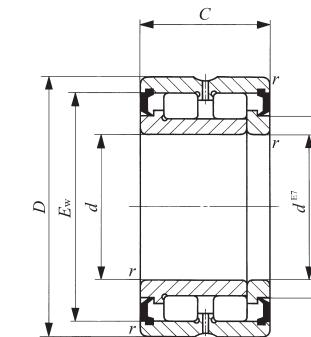

NAG49...UU

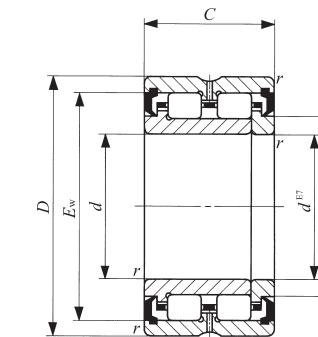

NAU49...UU  
TRU...UU

## ROLLER BEARINGS

Caged Roller Bearings With Seal

Full Complement Roller Bearings With Seal



Shaft dia. 42 – 80mm


Shaft dia. mm	Full complement type	Identification number		Mass (Ref.) g	Boundary dimensions mm				
		Caged type			d	D	C	$r_s$ min	J
42	—	—	TRU 426230UU	290	42	62	30	0.6	48
45	NAG 4909UU	—	—	265	45	68	22	0.6	51
	—	—	TRU 456430UU	295	45	64	30	0.6	50.5
	NAU 4909UU	—	—	260	45	68	22	0.6	51
50	NAG 4910UU	—	—	270	50	72	22	0.6	55.5
	—	NAU 4910UU	—	265	50	72	22	0.6	55.5
	—	—	TRU 507745UU	710	50	77	45	1	58
55	NAG 4911UU	—	—	395	55	80	25	1	61.5
	—	NAU 4911UU	—	385	55	80	25	1	61.5
	—	—	TRU 558138UU	615	55	81	38	1	61.5
60	NAG 4912UU	—	—	425	60	85	25	1	67
	—	NAU 4912UU	—	415	60	85	25	1	67
	—	—	TRU 608945UU	880	60	89	45	1	69.5
65	NAG 4913UU	—	—	455	65	90	25	1	72
	—	NAU 4913UU	—	440	65	90	25	1	72
70	NAG 4914UU	—	—	725	70	100	30	1	79
	—	NAU 4914UU	—	705	70	100	30	1	79
75	NAG 4915UU	—	—	775	75	105	30	1	83.5
	—	NAU 4915UU	—	750	75	105	30	1	83.5
	—	—	TRU 7510845UU	1240	75	108	45	1	85.5
80	NAG 4916UU	—	—	815	80	110	30	1	89.5
	—	NAU 4916UU	—	790	80	110	30	1	89.5

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$


(2) Allowable rotational speed applies to grease lubrication. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The outer ring has an oil groove and two oil holes.

2. The bearings with seals are provided with prepacked grease.

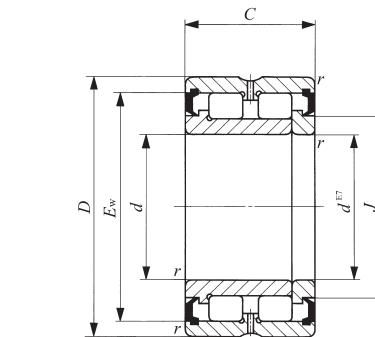

NAG49...UU

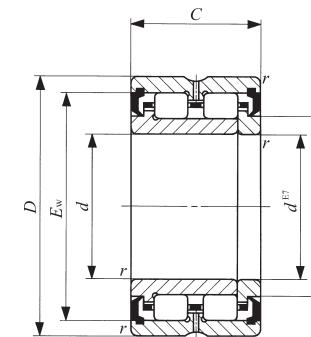

NAU49...UU  
TRU...UU

## ROLLER BEARINGS

Caged Roller Bearings With Seal

Full Complement Roller Bearings With Seal



Shaft dia. 85 – 140mm


Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm					
	Full complement type	Caged type		d	D	C	$r_s$ min ( <sup>1</sup> )	J	
85	<b>NAG 4917UU</b>	—	1 190	85	120	35	1.5	96	
		—		85	118	50	1	94.5	
		<b>NAU 4917UU</b>		85	120	35	1.5	96	
		—		85	120	45	1.5	96.5	
90	<b>NAG 4918UU</b>	—	1 250	90	125	35	1.5	101	
		—		90	125	35	1.5	101	
		<b>NAU 4918UU</b>		90	125	50	1.5	101	
95	<b>NAG 4919UU</b>	—	1 300	95	130	35	1.5	106	
		<b>NAU 4919UU</b>		95	130	35	1.5	106	
100	<b>NAG 4920UU</b>	—	1 850	100	140	40	1.5	114.5	
		—		100	135	50	1.5	112	
		<b>NAU 4920UU</b>		100	140	40	1.5	114.5	
105	—	—	<b>TRU 10515350UU</b>	2 890	105	153	50	1.5	120
110	<b>NAG 4922UU</b>	—	2 010	110	150	40	1.5	123	
		<b>NAU 4922UU</b>		110	150	40	1.5	123	
120	<b>NAG 4924UU</b>	—	2 780	120	165	45	1.5	136	
		<b>NAU 4924UU</b>		120	165	45	1.5	136	
125	—	—	<b>TRU 12517860UU</b>	4 490	125	178	60	1.5	143.5
130	<b>NAG 4926UU</b>	—	3 750	130	180	50	2	147	
		<b>NAU 4926UU</b>		130	180	50	2	147	
135	—	—	<b>TRU 13518860UU</b>	4 790	135	188	60	1.5	154
140	<b>NAG 4928UU</b>	—	3 990	140	190	50	2	157.5	
		<b>NAU 4928UU</b>		140	190	50	2	157.5	

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension  $r$


(<sup>2</sup>) Allowable rotational speed applies to grease lubrication. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The outer ring has an oil groove and two oil holes.

2. The bearings with seals are provided with prepacked grease.

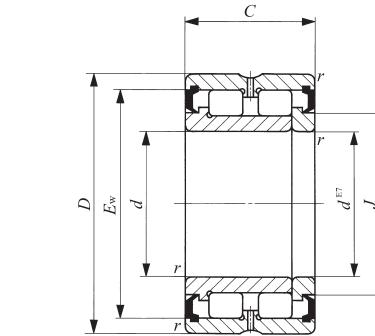

NAG49...UU

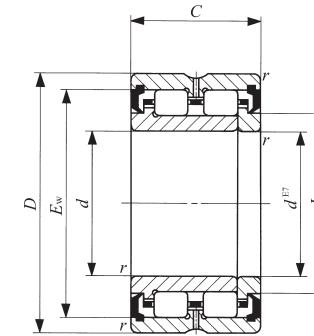

NAU49...UU  
TRU...UU

NAG  
NAU  
TRU  
NAS

$E_w$	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Allowable rotational speed <sup>(2)</sup> rpm
110	111 000	200 000	1 500
107.5	114 000	222 000	2 000
110	75 400	120 000	2 000
110	110 000	215 000	2 000
115.5	114 000	211 000	1 400
115.5	79 500	130 000	1 900
114	119 000	240 000	1 900
120.5	117 000	222 000	1 300
120.5	81 000	136 000	1 800
129.5	152 000	292 000	1 200
125.5	124 000	264 000	1 700
129.5	106 000	181 000	1 700
138	159 000	286 000	1 600
138.5	161 000	322 000	1 100
138.5	113 000	200 000	1 600
153.5	208 000	431 000	1 000
153.5	146 000	268 000	1 400
162	211 000	408 000	1 400
165.5	240 000	495 000	950
165.5	166 000	304 000	1 300
172.5	220 000	442 000	1 300
176	249 000	531 000	900
176	174 000	327 000	1 200

## ROLLER BEARINGS

Roller Bearings for Sheaves



Shaft dia. 40 – 170mm


Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						
	Sealed type	Shield type		<i>d</i>	<i>D</i>	<i>D</i> <sub>2</sub>	<i>B</i>	<i>C</i>	<i>C</i> <sub>1</sub>	<i>S</i>
40	NAS 5008UUNR	NAS 5008ZZNR	0.55	40	68	71.8	38	37	28	4.5
45	NAS 5009UUNR	NAS 5009ZZNR	0.70	45	75	78.8	40	39	30	4.5
50	NAS 5010UUNR	NAS 5010ZZNR	0.75	50	80	83.8	40	39	30	4.5
55	NAS 5011UUNR	NAS 5011ZZNR	1.15	55	90	94.8	46	45	34	5.5
60	NAS 5012UUNR	NAS 5012ZZNR	1.20	60	95	99.8	46	45	34	5.5
65	NAS 5013UUNR	NAS 5013ZZNR	1.30	65	100	104.8	46	45	34	5.5
70	NAS 5014UUNR	NAS 5014ZZNR	1.90	70	110	114.5	54	53	42	5.5
75	NAS 5015UUNR	NAS 5015ZZNR	2.00	75	115	119.5	54	53	42	5.5
80	NAS 5016UUNR	NAS 5016ZZNR	2.65	80	125	129.5	60	59	48	5.5
85	NAS 5017UUNR	NAS 5017ZZNR	2.80	85	130	134.5	60	59	48	5.5
90	NAS 5018UUNR	NAS 5018ZZNR	3.70	90	140	145.4	67	66	54	6
95	NAS 5019UUNR	NAS 5019ZZNR	3.90	95	145	150.4	67	66	54	6
100	NAS 5020UUNR	NAS 5020ZZNR	4.05	100	150	155.4	67	66	54	6
110	NAS 5022UUNR	NAS 5022ZZNR	6.50	110	170	175.4	80	79	65	7
120	NAS 5024UUNR	NAS 5024ZZNR	6.95	120	180	188.4	80	79	65	7
130	NAS 5026UUNR	NAS 5026ZZNR	10.5	130	200	208.4	95	94	77	8.5
140	NAS 5028UUNR	NAS 5028ZZNR	11.0	140	210	218.4	95	94	77	8.5
150	NAS 5030UUNR	NAS 5030ZZNR	13.5	150	225	233.4	100	99	81	9
160	NAS 5032UUNR	NAS 5032ZZNR	16.5	160	240	248.4	109	108	89	9.5
170	NAS 5034UUNR	NAS 5034ZZNR	22.5	170	260	270	122	121	99	11

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*


<sup>(2)</sup> Allowable rotational speed applies to grease lubrication. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The inner ring has an oil groove and two oil holes.

2. Roller Bearings for Sheaves are provided with prepacked grease.

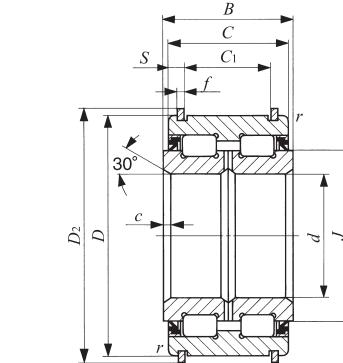

NAS50...UUNR


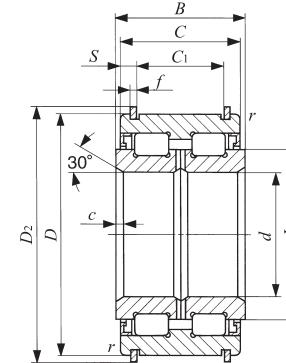


NAS50...ZZNR

<i>f</i>	<i>c</i>	<i>r</i> <sub>s min</sub> <sup>(1)</sup>	<i>J</i>	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm
2	1.5	0.6	50	79 500	116 000	2 500
2	1.5	0.6	56	95 500	144 000	2 000
2	1.5	0.6	61	100 000	158 000	2 000
2.5	2	0.6	68	118 000	193 000	1 800
2.5	2	0.6	73	123 000	208 000	1 700
2.5	2	0.6	78	128 000	224 000	1 600
2.5	2	0.6	84	171 000	284 000	1 400
2.5	2	0.6	91	179 000	308 000	1 300
2.5	2	0.6	97	251 000	428 000	1 300
2.5	2	0.6	101	257 000	446 000	1 200
2.5	2.5	0.6	110	305 000	540 000	1 100
2.5	2.5	0.6	114	312 000	562 000	1 100
2.5	2.5	0.6	118	318 000	584 000	1 000
2.5	3	1	130	384 000	697 000	900
3	3	1	139.5	400 000	750 000	850
3	3	1	156	537 000	1 000 000	750
3	3	1	167	543 000	1 070 000	700
3	3.5	1	176.5	623 000	1 210 000	650
3	3.5	1.5	188.5	720 000	1 390 000	650
4	3.5	1.5	204.5	857 000	1 730 000	600

## ROLLER BEARINGS

Roller Bearings for Sheaves

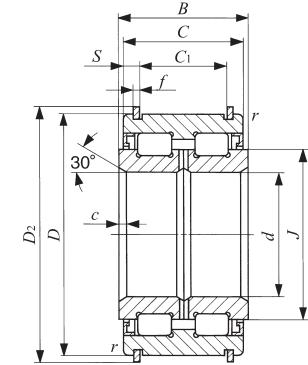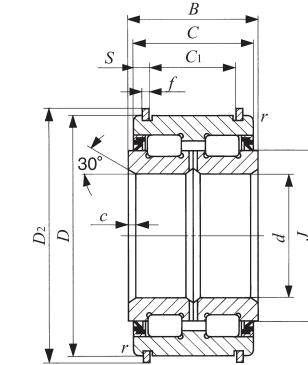

NAS50...UUNR

NAS50...ZZNR

Shaft dia. 180 – 440mm

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						
	Sealed type	Shield type		<i>d</i>	<i>D</i>	<i>D</i> <sub>2</sub>	<i>B</i>	<i>C</i>	<i>C</i> <sub>1</sub>	<i>S</i>
180	NAS 5036UUNR	NAS 5036ZZNR	30.0	180	280	294	136	135	110	12.5
190	NAS 5038UUNR	NAS 5038ZZNR	31.5	190	290	306	136	135	110	12.5
200	NAS 5040UUNR	NAS 5040ZZNR	40.5	200	310	326	150	149	120	14.5
220	NAS 5044UUNR	NAS 5044ZZNR	52.0	220	340	356	160	159	130	14.5
240	NAS 5048UUNR	NAS 5048ZZNR	55.5	240	360	376	160	159	130	14.5
260	NAS 5052UUNR	NAS 5052ZZNR	85.0	260	400	416	190	189	154	17.5
280	NAS 5056UUNR	NAS 5056ZZNR	90.9	280	420	440	190	189	154	17.5
300	NAS 5060UU	NAS 5060ZZ	130	300	460	—	218	216	—	—
320	NAS 5064UU	NAS 5064ZZ	135	320	480	—	218	216	—	—
340	NAS 5068UU	NAS 5068ZZ	180	340	520	—	243	241	—	—
360	NAS 5072UU	NAS 5072ZZ	190	360	540	—	243	241	—	—
380	NAS 5076UU	NAS 5076ZZ	200	380	560	—	243	241	—	—
400	NAS 5080UU	NAS 5080ZZ	265	400	600	—	272	270	—	—
420	NAS 5084UU	NAS 5084ZZ	275	420	620	—	272	270	—	—
440	NAS 5088UU	NAS 5088ZZ	310	440	650	—	280	278	—	—

Notes<sup>(1)</sup> Minimum allowable value of chamfer dimension *r*

<sup>(2)</sup> Allowable rotational speed applies to grease lubrication. Considering that the axial load acts under practical operating conditions, up to 1/10 of this value is recommended for actual use.

Remarks 1. The bearings with a bore diameter *d* of 300 mm or more has neither stop rings nor stop ring grooves.

2. The inner ring has an oil groove and two oil holes.

3. Roller Bearings for Sheaves are provided with prepacked grease.

<i>f</i>	<i>c</i>	<i>r</i> <sub>s min</sub> <sup>(1)</sup>	<i>J</i>	Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C</i> <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm
5	3.5	1.5	217	1 070 000	2 140 000	550
5	3.5	1.5	225	1 120 000	2 230 000	500
5	3.5	1.5	242	1 310 000	2 650 000	500
6	4	1.5	260	1 510 000	3 110 000	450
6	4	1.5	278.5	1 570 000	3 350 000	400
7	5	2	312	2 130 000	4 510 000	350
7	5	2	335	2 210 000	4 860 000	350
—	5	2	359	2 670 000	5 870 000	300
—	5	2	375	2 700 000	6 140 000	300
—	6	2.5	404	3 370 000	7 560 000	300
—	6	2.5	423	3 420 000	7 940 000	250
—	6	2.5	442	3 580 000	8 300 000	250
—	6	2.5	471	4 250 000	10 100 000	250
—	6	2.5	490	4 390 000	10 400 000	250
—	8	3	516	4 570 000	10 900 000	200