

For special environment

IKO

Non-Magnetic

Linear Motion Rolling Guide Series



*Challenging the new frontier of special environment
with fresh ideas and long experiences.*

CAT-5937

IKO Non-Magnetic Linear Motion Rolling Guide Series



Linear Motion Rolling Guides that are used in semiconductor and liquid crystal manufacturing equipment and inspection equipment may be operated within a magnetic field or in a place that must avoid the influence of magnetic force in the equipment using electron beams. Non-Magnetic Linear Motion Rolling Guides using a combination of non-magnetic stainless steel, non-magnetic hard alloy, or ceramics for the casing, track rail, and way, and silicon nitride ceramics for the rotating elements are useful for these applications.

Characteristics of non-magnetic materials

	Silicon nitride ceramics	Beryllium copper ⁽⁴⁾	Non-magnetic hard alloy	Non-magnetic stainless steel	SUS316	SUS304
Relative magnetic permeability ⁽¹⁾	1 (0.999991)	1 (1.00002)	1.001 max. (1.0002)	1.01 max. (1.005)	1.01 max. (1.0091)	1.04 max. (1.0366)
Electric conductivity	×	○	○	○	○	○
Hardness ⁽²⁾ Hv	1400 ~ 1600	350 ~ 410	1200 ~ 1450	380 ~ 450	~ 200	~ 200
Linear expansion coefficient ⁽³⁾ × 10 ⁻⁶ /°C	3.2	17.5 ~ 18.0	5.1	19.0	16.2 (20 ~ 316°C)	17.8 (20 ~ 316°C)
Specific gravity g/cm ³	3.2	8.3	14.5	7.9	7.9	7.9
Main ingredients	Si ₃ N ₄	Cu, Be	Ni, WC	Fe, Mn, Cr	Fe, Ni, Cr	Fe, Ni, Cr
Cost	△	○	△	◎	—	—
Remark	Excellent corrosion resistance	Environmental load material	Sintered alloy	Higher hardness than beryllium copper	—	—


Remark : This table shows a property comparison among general non-magnetic materials. is a recommended material for the raceway.


Note (1) The value in parentheses is an example of measured value.

(2) Hardness after age hardening for beryllium copper and non-magnetic stainless steel. SUS304 and SUS316 have no quench hardness.

(3) A mean value of 20°C to 400°C unless otherwise specified.


(4) Beryllium copper is not available in consideration of the environment.

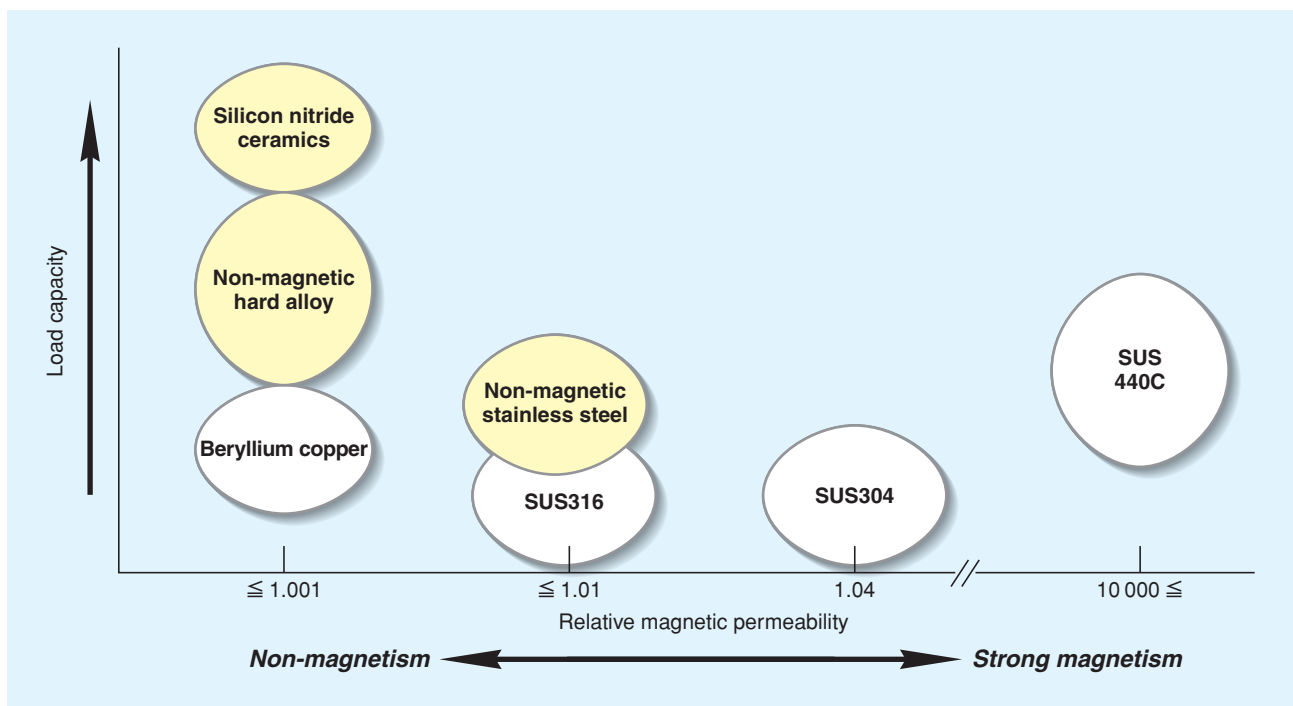

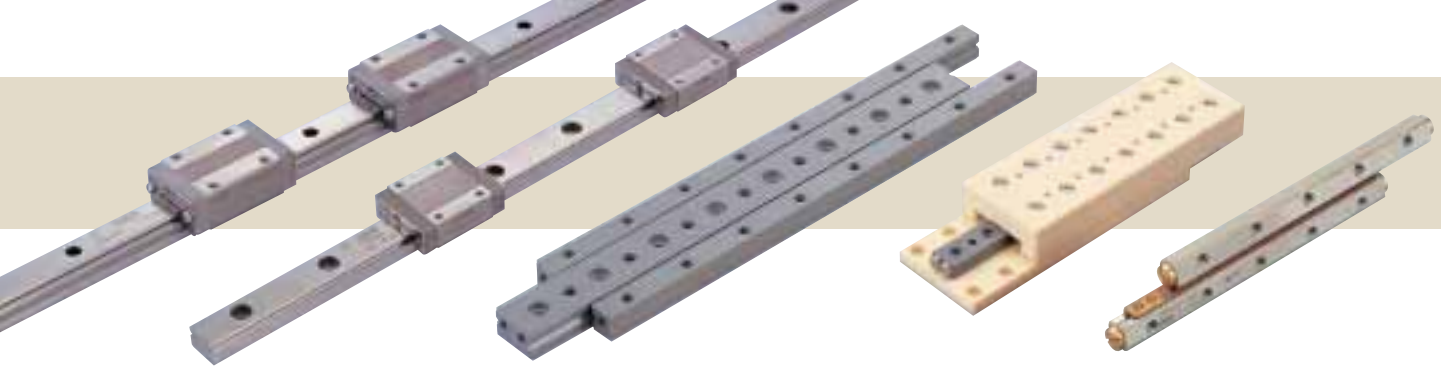

Combination of Specifications


Non-magnetic stainless steel specification (Relative magnetic permeability ≤ 1.01)

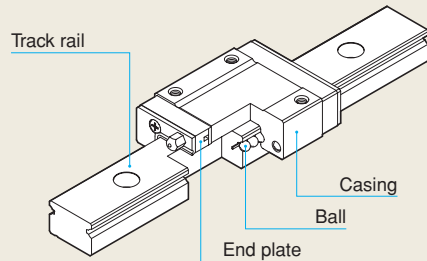

Standard specification

Casing	Non-magnetic stainless steel
Track rail	Non-magnetic stainless steel
Ball	Silicon nitride ceramics
End plate	General-purpose engineering plastics, SUS316
Screws	SUS316


Non-magnetic hard alloy specification (Relative magnetic permeability ≤ 1.001)

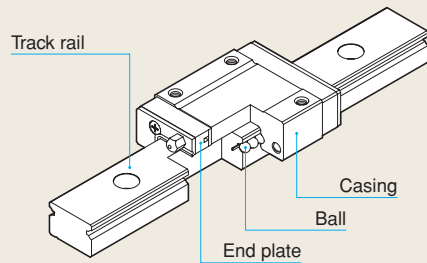

Standard specification

Casing	Non-magnetic hard alloy
Track rail	Non-magnetic hard alloy
Ball	Silicon nitride ceramics
End plate	General-purpose engineering plastics, Specific engineering plastic
Screws	Titanium alloy

Ceramics specification (Relative magnetic permeability ≤ 1.001)

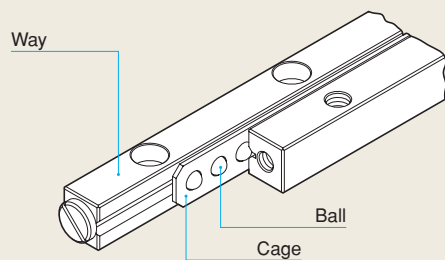

Standard specification

Way	Silicon nitride ceramics
Ball	Silicon nitride ceramics
Cage	Phosphor bronze
Screws	Phosphor bronze

Selection of Lubricant

By selecting a lubricant (grease for vacuum, special polymeric fluoride coating, etc.), this series can be used in various operating environments such as a vacuum environment and a clean environment.

Load Capacities

The load capacities are compared as Silicon nitride ceramics > Non-magnetic hard alloy > Non-magnetic stainless steel.

Availability of Series and Model Codes

Series	Main model code
Linear Way L	LWL, LWLF
Linear Way E	LWE
Linear Way H	LWH
Crossed Roller Way	CRW, CRWU
High Rigidity Precision Linear Slide Unit	BWU

Products are manufactured on a make-to-order basis. If any combination of specification other than the above is required. Ask **IKO** for availability.

[Non-Magnetic]
Linear Motion Rolling Guide Series



See you again at
Planet IKO
<http://www.ikont.co.jp/>

NIPPON THOMPSON CO., LTD.

Head office : 19-19 Takanawa 2-chome
Minato-ku, Tokyo 108-8586, Japan
Phone : Tokyo (03)3448-5850
Fax : (03)3447-7637
E-mail : ntt@ikonet.co.jp
URL : <http://www.ikont.co.jp/>
Plant : Gifu, Kamakura

IKO International, Inc.

- 91 Walsh Drive
Parsippany, NJ 07054
U.S.A.
Phone: (973)402-0254
Toll Free: 1-800-922-0337
Fax: (973)402-0441
E-mail: eco@ikonet.co.jp
- 500 East Thorndale Avenue
Wood Dale, IL 60191
U.S.A.
Phone: (630)766-6464
Toll Free: 1-800-323-6694
Fax: (630)766-6869
E-mail: mwo@ikonet.co.jp
- 20170 South Western Avenue
Torrance, CA 90501
U.S.A.
Phone: (310)609-3988
Toll Free: 1-800-252-3665
Fax: (310)609-3916
E-mail: wco@ikonet.co.jp
- 2150 Boggs Road, Suite 100
Duluth, GA 30096
U.S.A.
Phone: (770)418-1904
Toll Free: 1-800-874-6445
Fax: (770)418-9403
E-mail: seo@ikonet.co.jp
- 8105 N. Beltline Road
Suite 130, Irving, TX 75063
U.S.A.
Phone: (972)929-1515
Toll Free: 1-800-295-7886
Fax: (972)915-0060
E-mail: swo@ikonet.co.jp

Nippon Thompson Europe B.V.

- Sheffieldstraat 35-39
3047 AN Rotterdam
The Netherlands
Phone: 010-4626868
Fax: 010-4626099
E-mail: nte@ikonet.co.jp
- Mündelheimer Weg 56
40472 Düsseldorf
Germany
Phone: 0211-414061
Fax: 0211-427693
E-mail: ntd@ikonet.co.jp
Donaustr. 200
93059 Regensburg
Germany
Phone: 0941-447737
Fax: 0941-447747
- 2 Vincent Avenue, Crownhill
Milton Keynes Bucks MK8 OAB
United Kingdom
Phone: 01908-566144
Fax: 01908-565458
E-mail: sales@iko.co.uk
- Autovia Madrid-Barcelona, Km. 43,700
Polig. Ind. AIDA, A-8, Ofic. 2, 1^a
19200-Azuqueca de Henares
Guadalajara, Spain
Phone: 949-263390
Fax: 949-263113
E-mail: nts@ikonet.co.jp
- Roissypole Le Dôme
2 rue de La Haye
BP 10950 Tremblay en France
95733 Roissy C. D. G. Cedex
France
Phone: 01-48165739
Fax: 01-48165746
E-mail: ntf@ikonet.co.jp

Although all data in this catalog has been carefully compiled to make the information as complete as possible, NIPPON THOMPSON CO., LTD. shall not be liable for any damages whatsoever, direct or indirect, based upon any information in this catalog. NIPPON THOMPSON CO., LTD. makes no warranty, either express or implied, including the implied warranty of merchantability or fitness for a particular purpose.